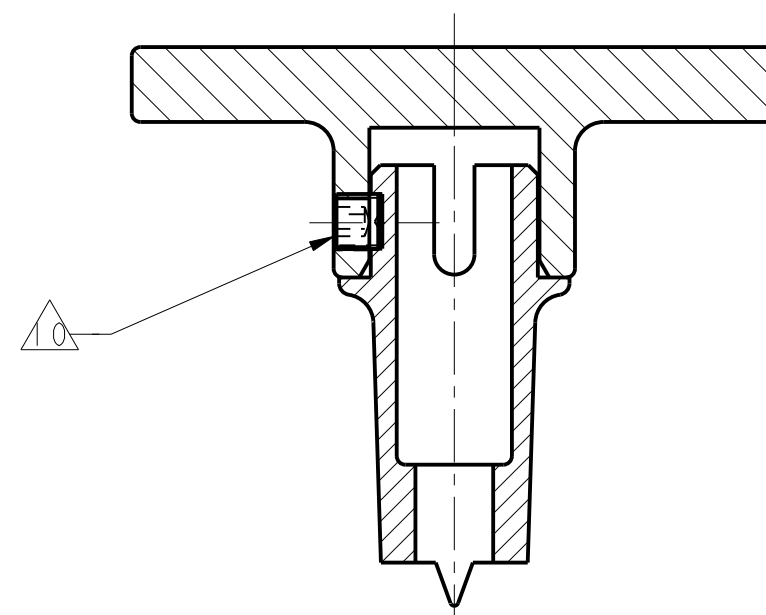




LEVER DETAIL
SCALE 3/1

.090 APPROX PULLOUT TO CHANGE POSITION FROM CENTER TO SIDE

34°±8° TOTAL TRAVEL

17°±4°

.42

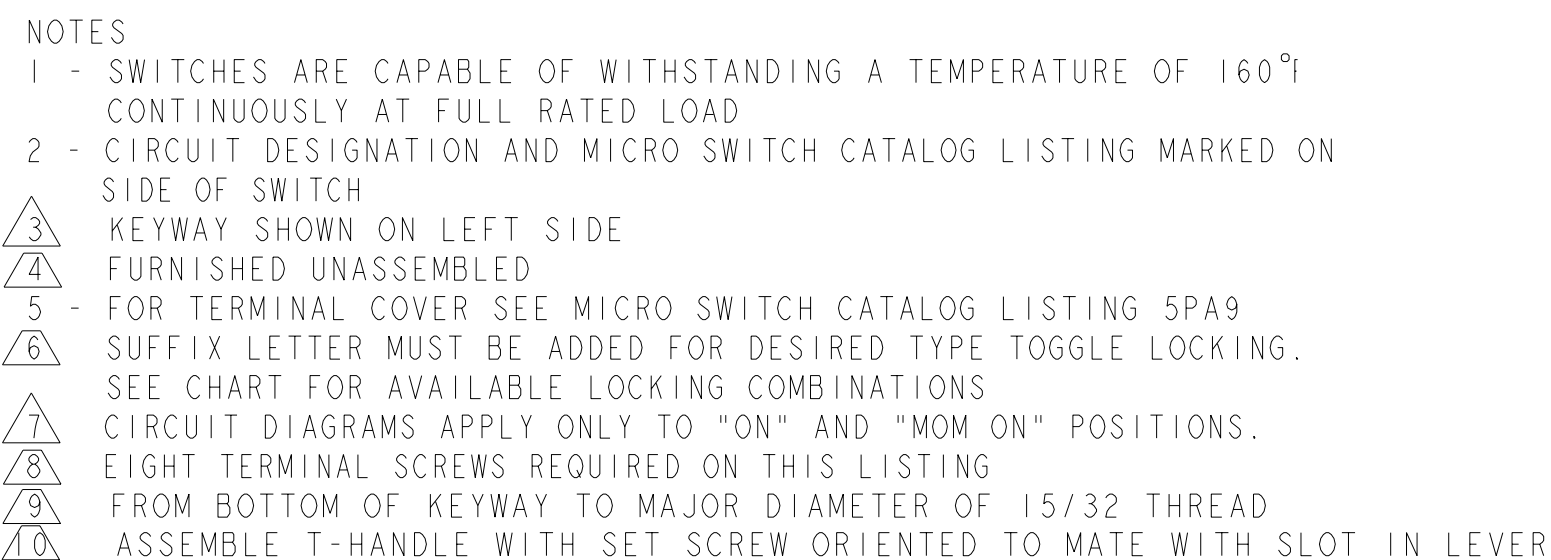
SEE LOCKING DETAILS FOR DESCRIPTION ("A" LOCKING INSERT SHOWN)


SEALED TO PREVENT ENTRANCE OF LIQUIDS OR DUST

15/32-32 UNS-2 THREAD TO WITHIN .060 OF SHOULDER

12X 6-32 UNC X (.260) BINDING HEAD TERMINAL SCREW AND LOCKWASHER (SEMS)

Dimensions: .13, .08, .40, .47, .24, 1.10, 1.35, .250, .130 MIN

[illegible]

THIRD ANGLE PROJECTION		
		
SCALE	FULL	
DO NOT SCALE PRINT		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	± .030
TWO PLACES	(.00)	± .015
THREE PLACES	(.000)	± .005
ANGLES		±
WEIGHT		

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING

4TL35 SERIES CHART 2

ANSI Y14.5M-1982 APPLIES

4TL35 SERIES CHART 2

DRAWING NUMBER:

4	
---	--

REVISIONS

A	CO-94444
---	----------

S A V
23 NOV 99

B	203526
---	--------

G J W
26 JUL 01

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

2

$$\begin{array}{c|c} \text{D} & z \\ \hline \text{E} & \end{array}$$

RAW

D

TC

u