





MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
4TL62 SERIES
CHART 1

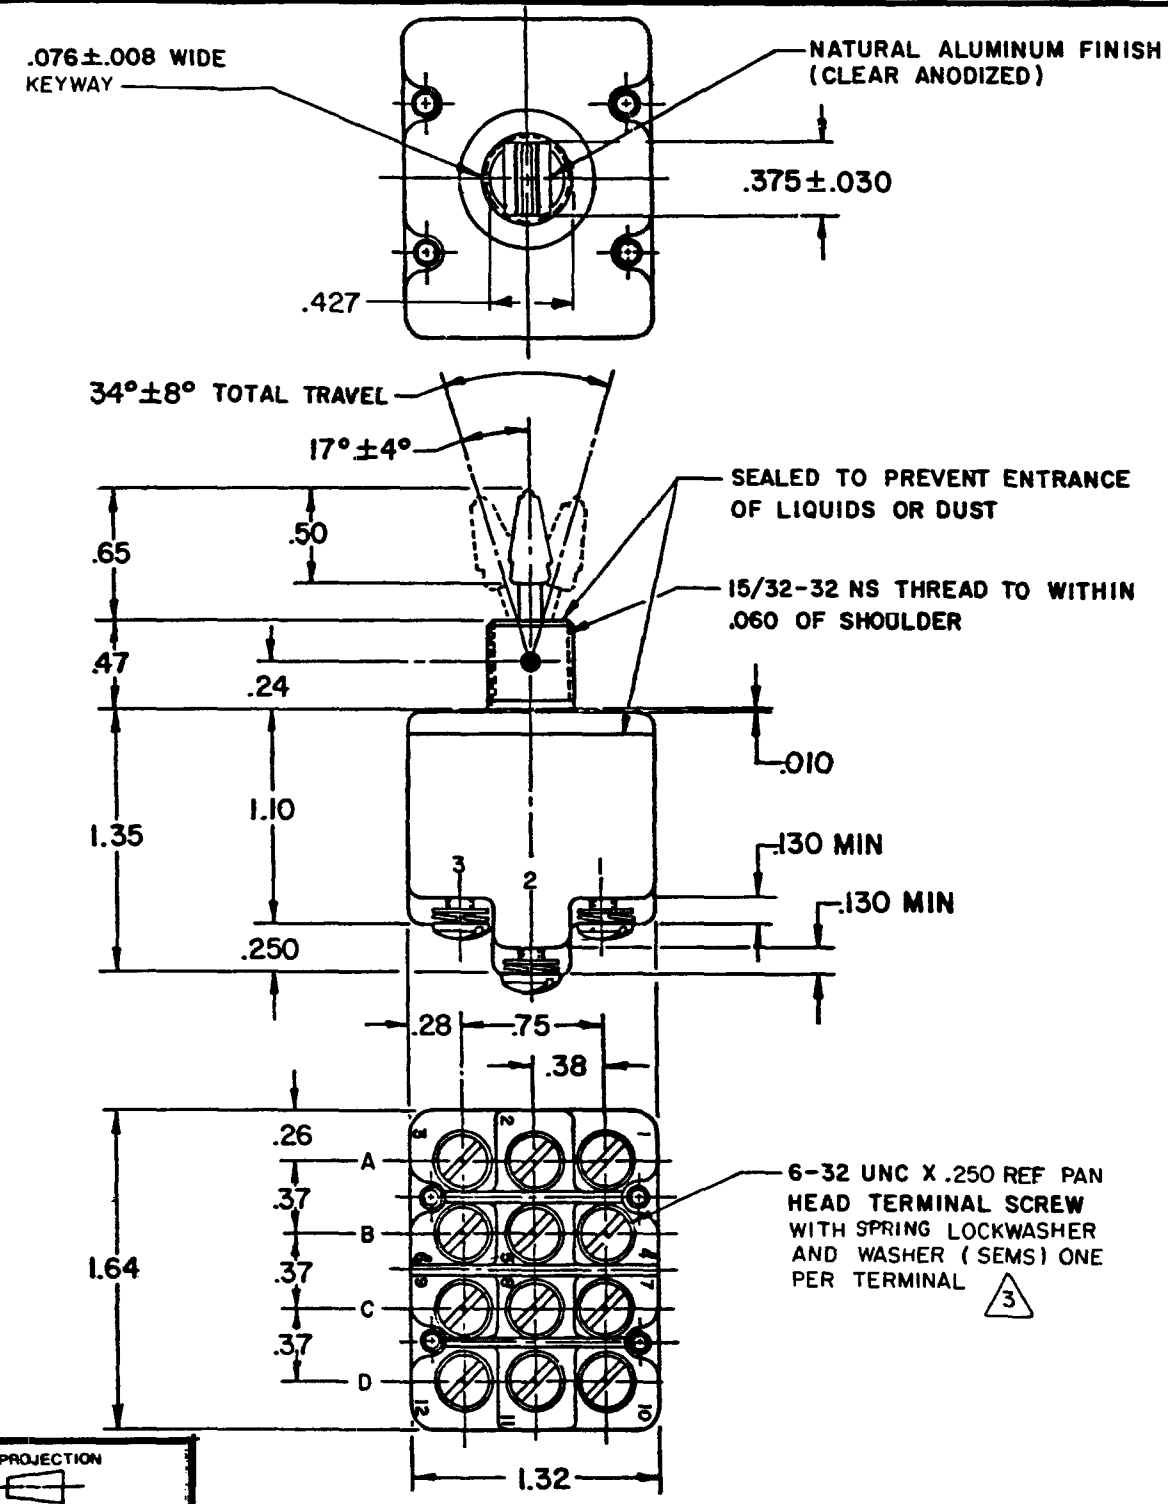

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN			MILITARY RATING (AMPS)							
	KEYWAY SIDE (1-2, 4-5, 7-8, 10-11)	CENTER (1-2, 4-5, 7-8, 10-11)	OPPOSITE KEYWAY (2-3, 5-6, 8-9, 11-12)	RESISTIVE LOAD DC VOLTS		LOAD AC VOLTS		LAMP LOAD		INDUCTIVE LOAD	
				28	125	250	125	250	28 VDC	125 VAC	250 VAC
4TL62-1	ON	OFF	ON	20	.75	.5	15	6	5	4	12
4TL62-3	OFF	NONE	ON								
4TL62-21	ON	NONE	ON								
4TL62-31	NONE	OFF	ON								
4TL62-4	MOM OFF	NONE	ON	18	.75	.5	11	6	4	2	10
4TL62-5	MOM ON	OFF	ON								
4TL62-6	MOM ON	NONE	OFF								
4TL62-7	MOM ON	OFF	MOM ON								
4TL62-8	MOM ON	NONE	ON								
4TL62-51	NONE	ON	MOM ON								
4TL62-61	MOM ON	OFF	NONE								

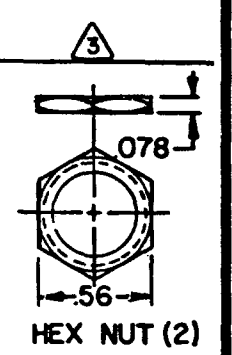

- NOTES**
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - 3 - FURNISHED UNASSEMBLED
 - 4 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA9
 - 5 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/.04	X.X
ONE PLACE	X.X	0.4/.016	X.XX
TWO PLACES	X.XX	0.15/.006	X.XXX
THREE PLACES	X.XXX		X.XXXX

DESIGN UNITS

SI METRIC ☐ US CUSTOMARY ☒

RAW MATERIAL-COMMERCIAL STANDARD

MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

WEIGHT