

MICRO SWITCH

FED. MFR. CODE 91929

SWITCH-TOGGLE

CATALOG LISTING
4TL66-1LDRAWING NUMBER
4TL66-1L

PAGE 1 OF 1

M

ISSUE
12

REVISIONS

A CO-81150

J A K

19 JUN 95

B CO-

94444

J J A

23 NOV 99

C 0042426

KVS

14 AUG 08

CHECK

N

SE

16 MAY 62

CHECK

N

SE

16 MAY 62

CHECK

N

SE

16 MAY 62

CHECK

N

SE

16 MAY 62

CHECK

N

SE

16 MAY 62

CHECK

N

SE

16 MAY 62

CHECK

N

SE

16 MAY 62

CHECK

N

SE

16 MAY 62

CHECK

N

SE

16 MAY 62

CHECK

N



SE

16 MAY 62


CHECK

N

SE

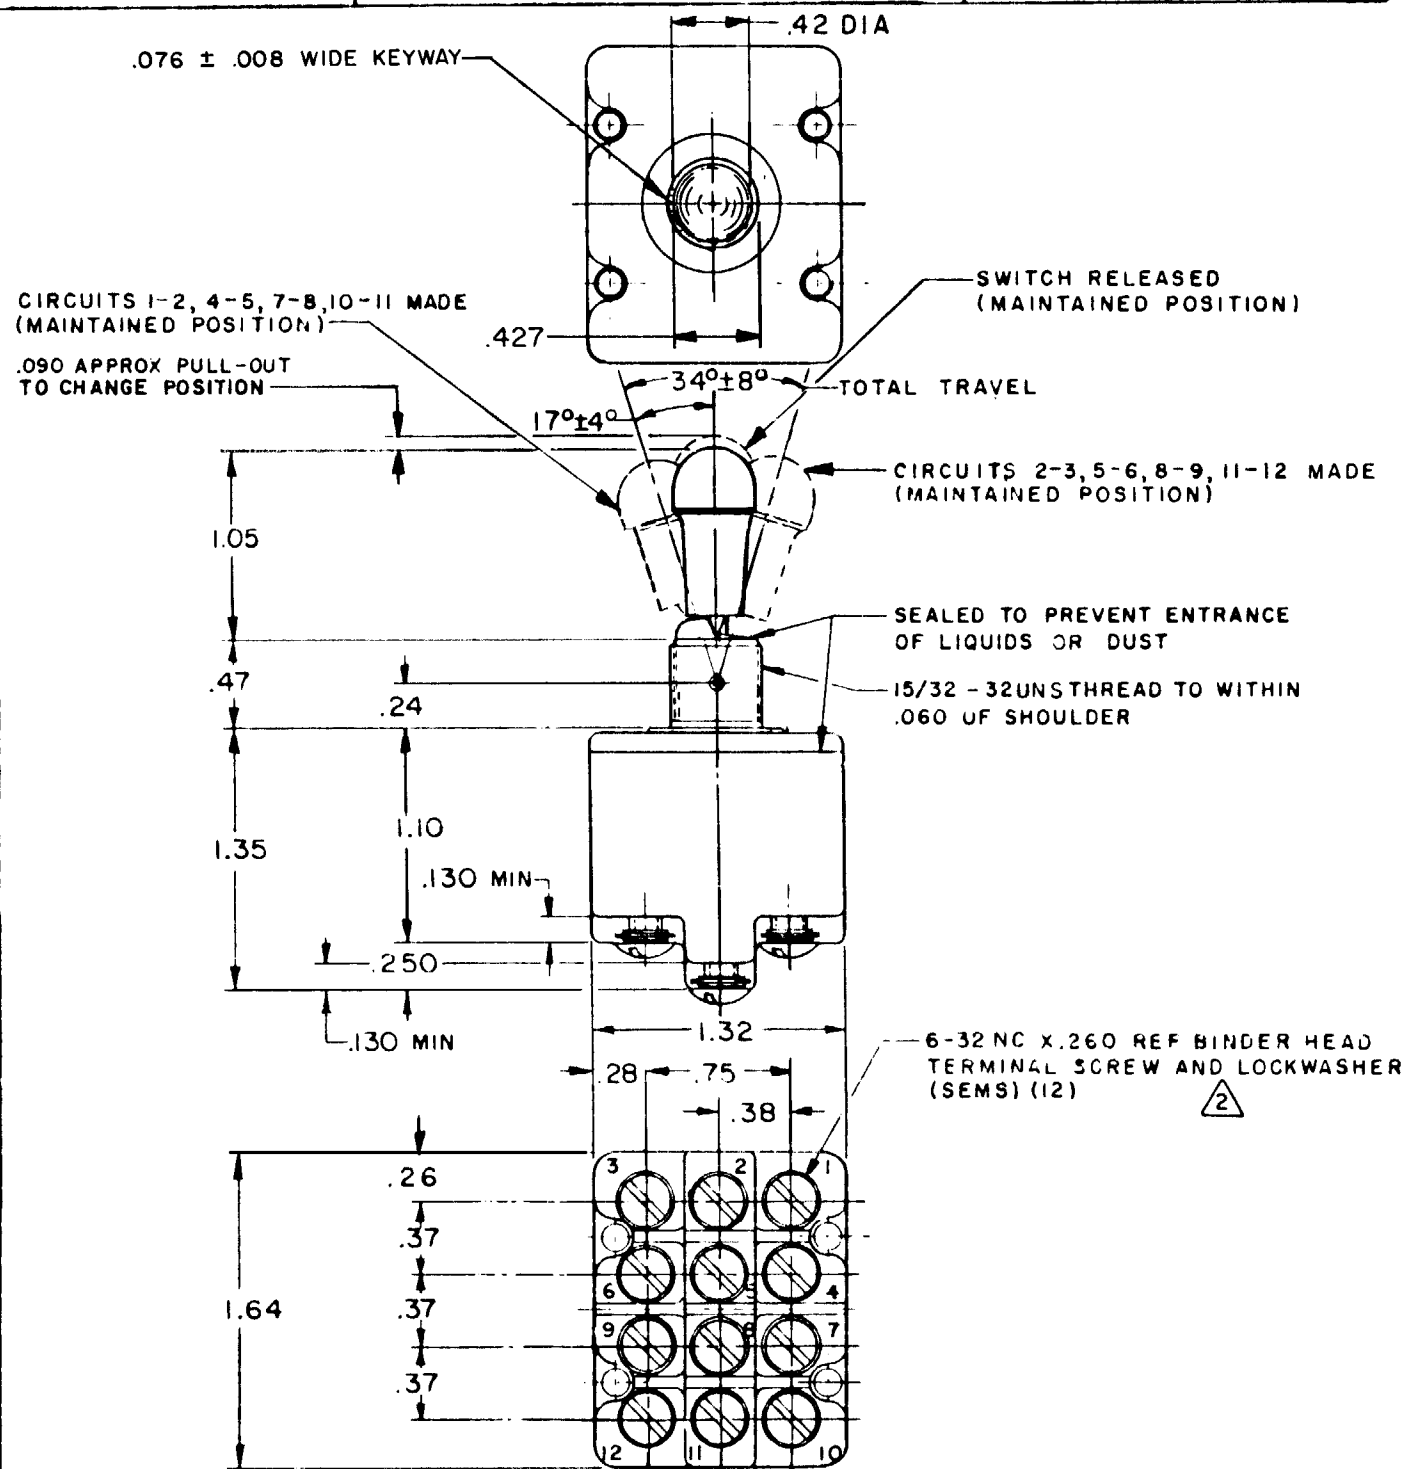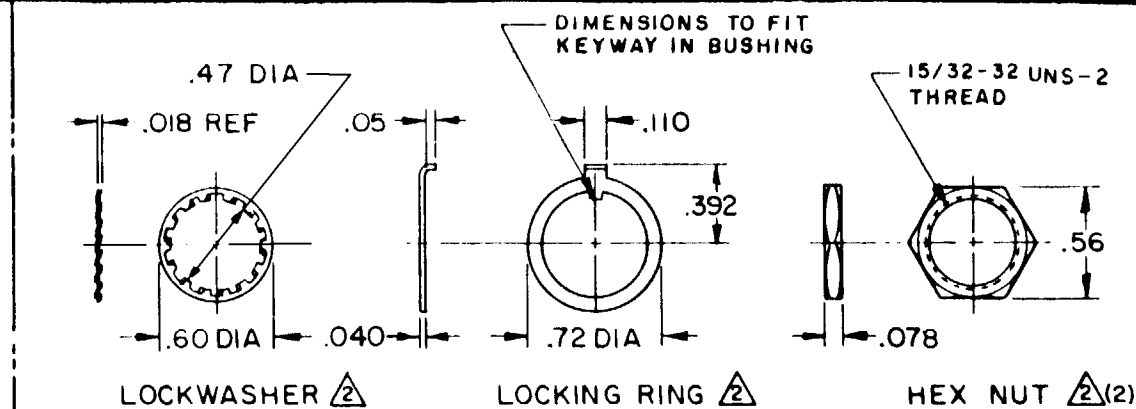

CIRCUIT DIAGRAM

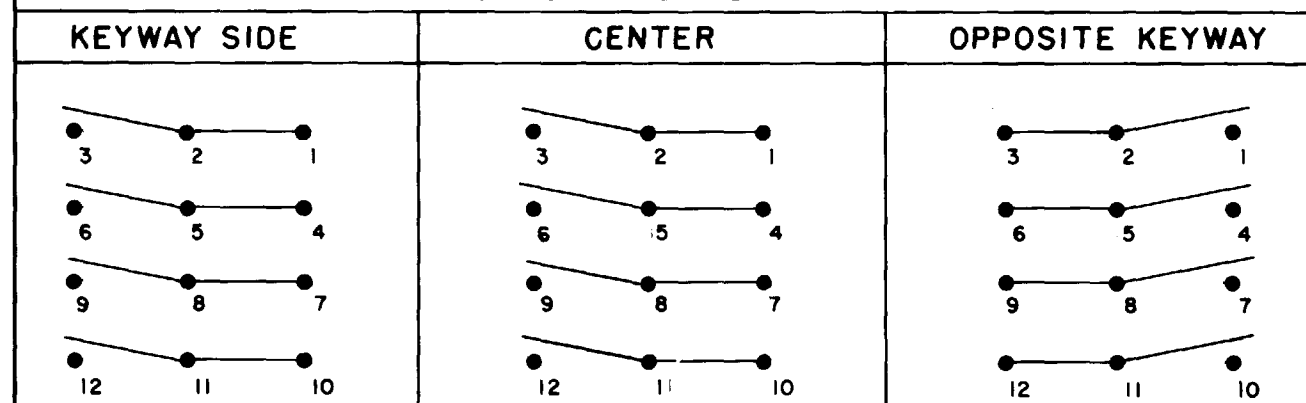

NOTES

- SWITCH IS CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- FURNISHED UNASSEMBLED
- MICRO SWITCH CATALOG LISTING AND CIRCUIT DESIGNATION MARKED ON SIDE OF SWITCH
- FOR TERMINAL COVER SEE MICRO SWITCH CAT. LIST. 5PA9

ELECTRICAL DATA

MILITARY RATING (AMPS)

CONTINUOUS	RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD	
	28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
	20	.75	.5	15	6	5	4	12	15

SCALE -

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.01) ± .01

TWO PLACE (.001) ± .001

THREE PLACE (.0001) ± .0001

ANGLES 2° -

WEIGHT .19 LB EST

L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"

