


MICRO SWITCH
FREEPORT, ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91928

**SWITCH - TOGGLE
FLUSH KEY**

CATALOG LISTING
4TP1 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

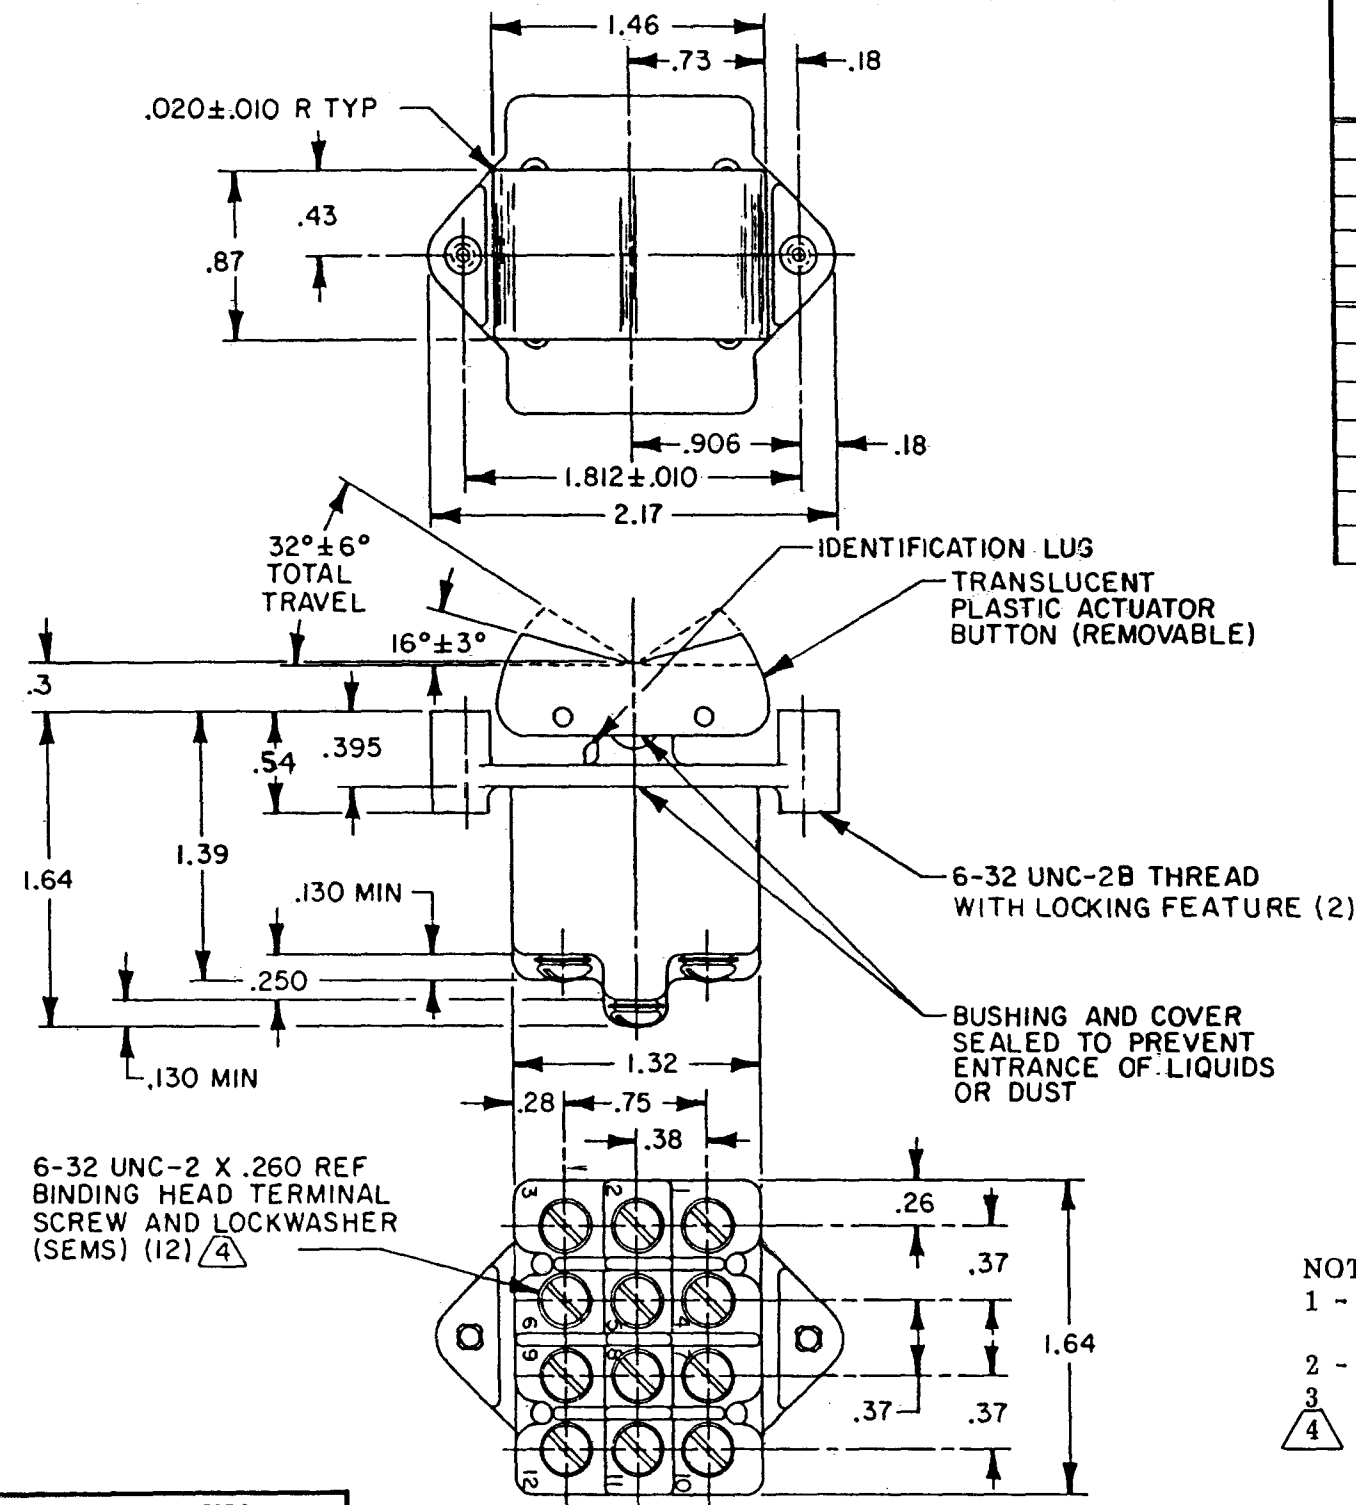

CATALOG LISTING	CIRCUIT MADE WITH BUTTON DEPRESSED ON			ELECTRICAL DATA
	LUG SIDE (1-2, 4-5, 7-8, 10-11)	CENTER (1-2, 4-5, 7-8, 10-11)	OPPOSITE LUG (2-3, 5-6, 8-9, 11-12)	
4TP1-1	ON	OFF	ON	15A-125, 250 OR 277 VAC 1/2HP-125VAC; 1HP-250, 277VAC 5A-125VAC "L" CODE L191
4TP1-3	OFF	NONE	ON	
4TP1-21	NONE	OFF	ON	
4TP1-4	MOM OFF	NONE	ON	
4TP1-5	MOM ON	OFF	ON	10A-125, 250, 277 VAC 1/4HP-125VAC; 1/2HP-250, 277 VAC 3A-125VAC "L" CODE L192
4TP1-6	MOM ON	NONE	OFF	
4TP1-7	MOM ON	OFF	MOM ON	
4TP1-8	MOM ON	NONE	ON	
4TP1-51	NONE	ON	MOM ON	
4TP1-61	MOM ON	OFF	NONE	

- NOTES
- 1 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - 2 - THESE SWITCHES WILL WITHSTAND TEMPERATURE OF 160°F
 - 3 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - 4 - SCREWS FURNISHED UNASSEMBLED

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

	DM.	TOL.	DM.	TOL.
	mm	mm/in	in	mm/in
NO PLACES	X	1/64	X	0.075
ONE PLACE	X, X	0.01/0.015	X, X	0.001/0.015
TWO PLACES	X, X	0.001/0.005	X, X	0.0001/0.005
THREE PLACES	X, X	0.0001/0.0005	X, X	0.00001/0.0005

DESIGN UNITS ☐ METRIC ☒ US CUSTOMARY

WEIGHT .22 LB EST