
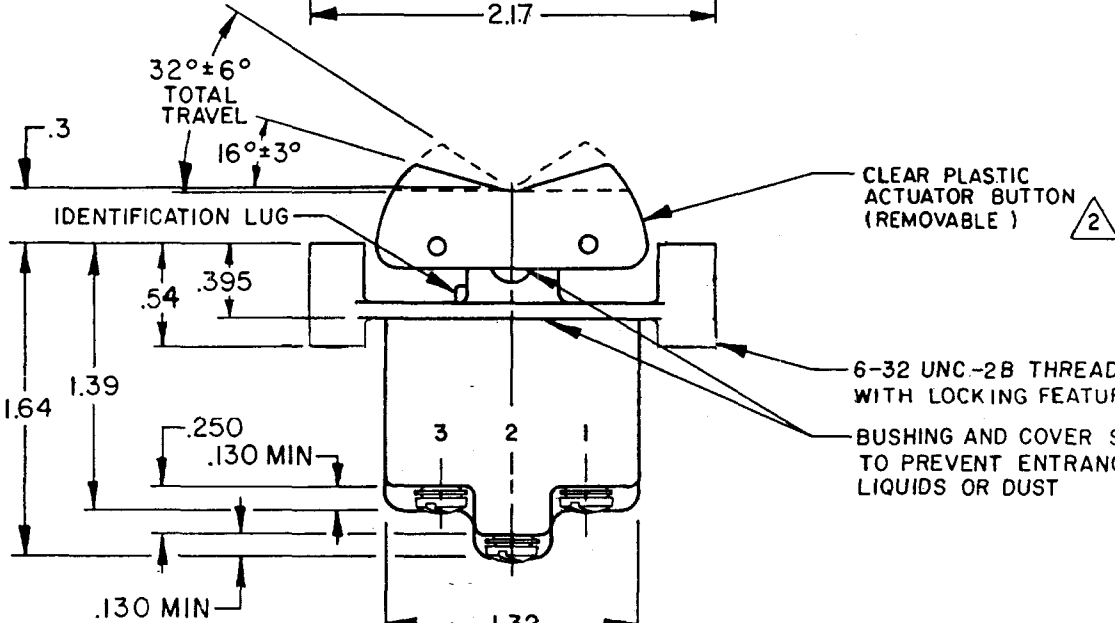


MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929


**SWITCH-TOGGLE
FLUSH KEY**

CATALOG LISTING
4TP66 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

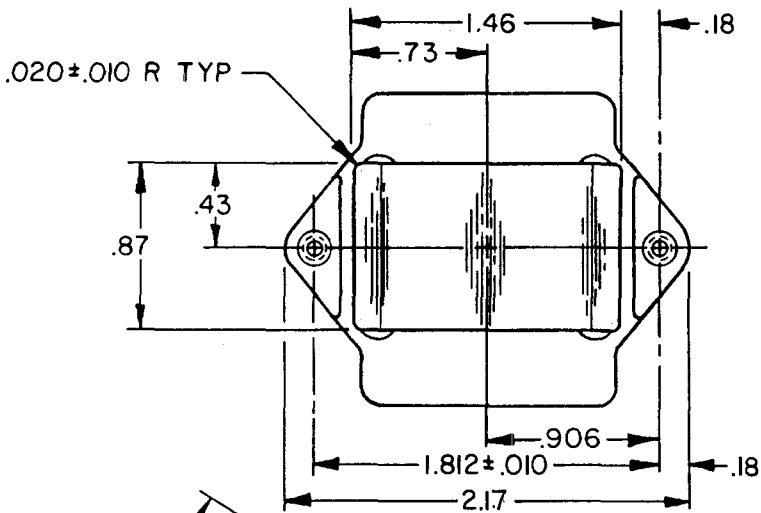

6-32 UNC X .260 REF BINDING HEAD
TERMINAL SCREW AND LOCKWASHER
(SEMS) ONE PER TERMINAL

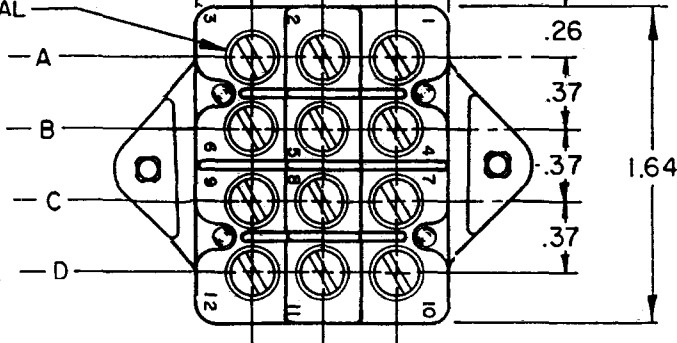

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/64	
ONE PLACE	X.X	0.4/0.16	X.X 0.8/0.03
TWO PLACES	X.XX	0.15/0.006	X.XX 0.38/0.015
THREE PLACES	X.XXX		X.XXX 0.13/0.005

SI METRIC ☐ US CUSTOMARY ☒


DESIGN UNITS ☐ ☒

RAW MATERIAL-COMMERCIAL STANDARD
MICRO SWITCH STANDARDS APPLY
DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT

CATALOG LISTING	CIRCUIT MADE WITH BUTTON DEPRESSED ON		
	LUG SIDE (1-2,4-5 7-8,10-11)	CENTER (1-2,4-5 7-8,10-11)	OPPOSITE LUG (2-3,5-6 8-9,11-12)
4TP66 - 1	ON	OFF	ON
4TP66 - 2	OFF	NONE	ON
4TP66 - 3	ON	NONE	ON
4TP66 - 2I	NONE	OFF	ON
4TP66 - 3I	NONE	ON	ON
4TP66 - 4	MOM OFF	NONE	ON
4TP66 - 5	MOM ON	OFF	ON
4TP66 - 6	MOM ON	NONE	OFF
4TP66 - 7	MOM ON	OFF	MOM ON
4TP66 - 8	MOM ON	NONE	ON
4TP66 - 5I	NONE	ON	MOM ON
4TP66 - 6I	MOM ON	OFF	NONE

15A-125,250 OR 277VAC
1/2HP-125VAC; 1HP-250,277VAC
5A-125VAC "L" CODE L191



10A-125, 250, 277 VAC
1/4HP-125VAC; 1/2HP-250, 277VAC
3A-125VAC "L" CODE 192



- NOTES
- 1 - TERMINAL DESIGNATION AND MICRO SWITCH CATALOG LISTING
MARKED ON SIDE OF SWITCH
- 2 - FURNISHED UNASSEMBLED
- 3 - THESE SWITCHES WILL WITHSTAND TEMPERATURE OF 160°F
- 4 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS