

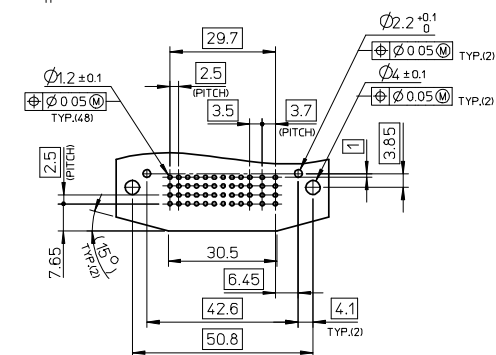

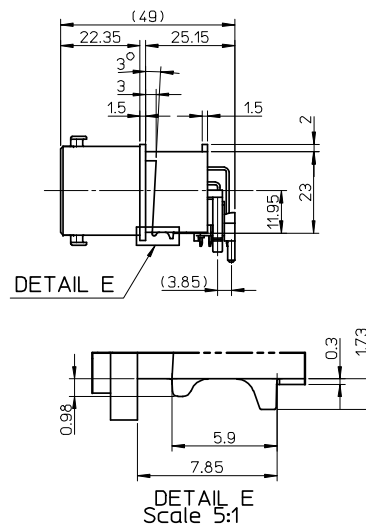
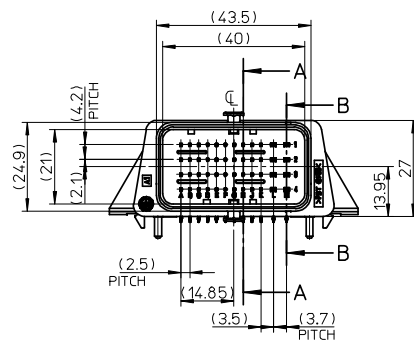

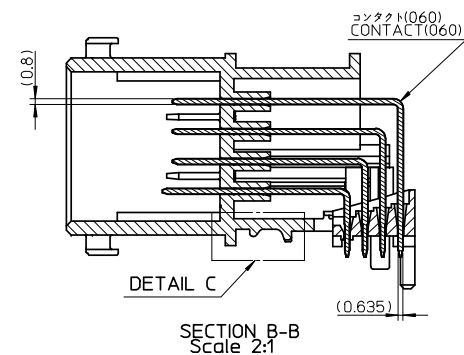
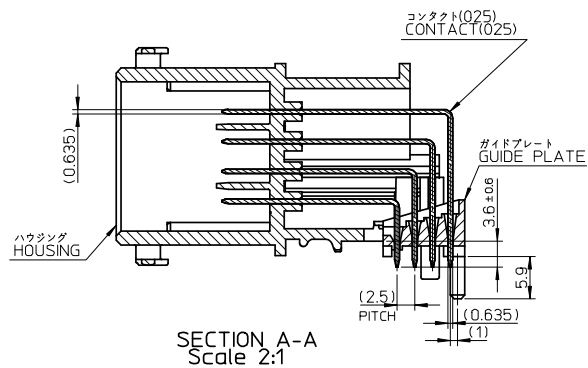






基板穴推奨寸法 (部品実装面)
RECOMMENDED PCB LAYOUT (COMPONENT SIDE)



注記
NOTES

1. ハウジング、ガイドプレート材料：PBT-GF30%(黒色)
HOUSING, GUIDE PLATE MATERIAL : PBT-GF30%(BLACK)
2. 端子(025,060)材料：銅合金
CONTACT(025,060) MATERIAL : COPPER ALLOY
3. 端子(025,060)のめっき処理：銀めっき(接点部、テール部)、下地Niめっき
CONTACT(025,060) PLATING : Sn PLATING(CONTACT, SOLDERING AREA), OVER Ni PLATING
4. 推奨基板厚：1.6±0.1mm
RECOMMENDED P.C.B. THICKNESS : 1.6±0.1mm



RELEASED EC NO: JTR2009-0026 CHIKUSANDO O CHIKUMA, YAMAMOTO 2008/08/08 APPR:KANESHI GE 2008/08/08	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY H. TANAKA	DATE 2006/5/22	TITLE CMC HEADER 48PIN			
		10 OVER 30 UNDER	± 0.25	CHECKED BY MA. YAMAMOTO	DATE 2006/5/22				
		30 OVER	± 0.3	APPROVED BY A. KANESHI GE	DATE 2006/5/22	MOLEX MOLEX INCORPORATED			
		ANGULAR ±2 °		MATERIAL NO. 500762-0481		DOCUMENT NO. SD-500762-001		SHEET NO. 1 OF 1	
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				