




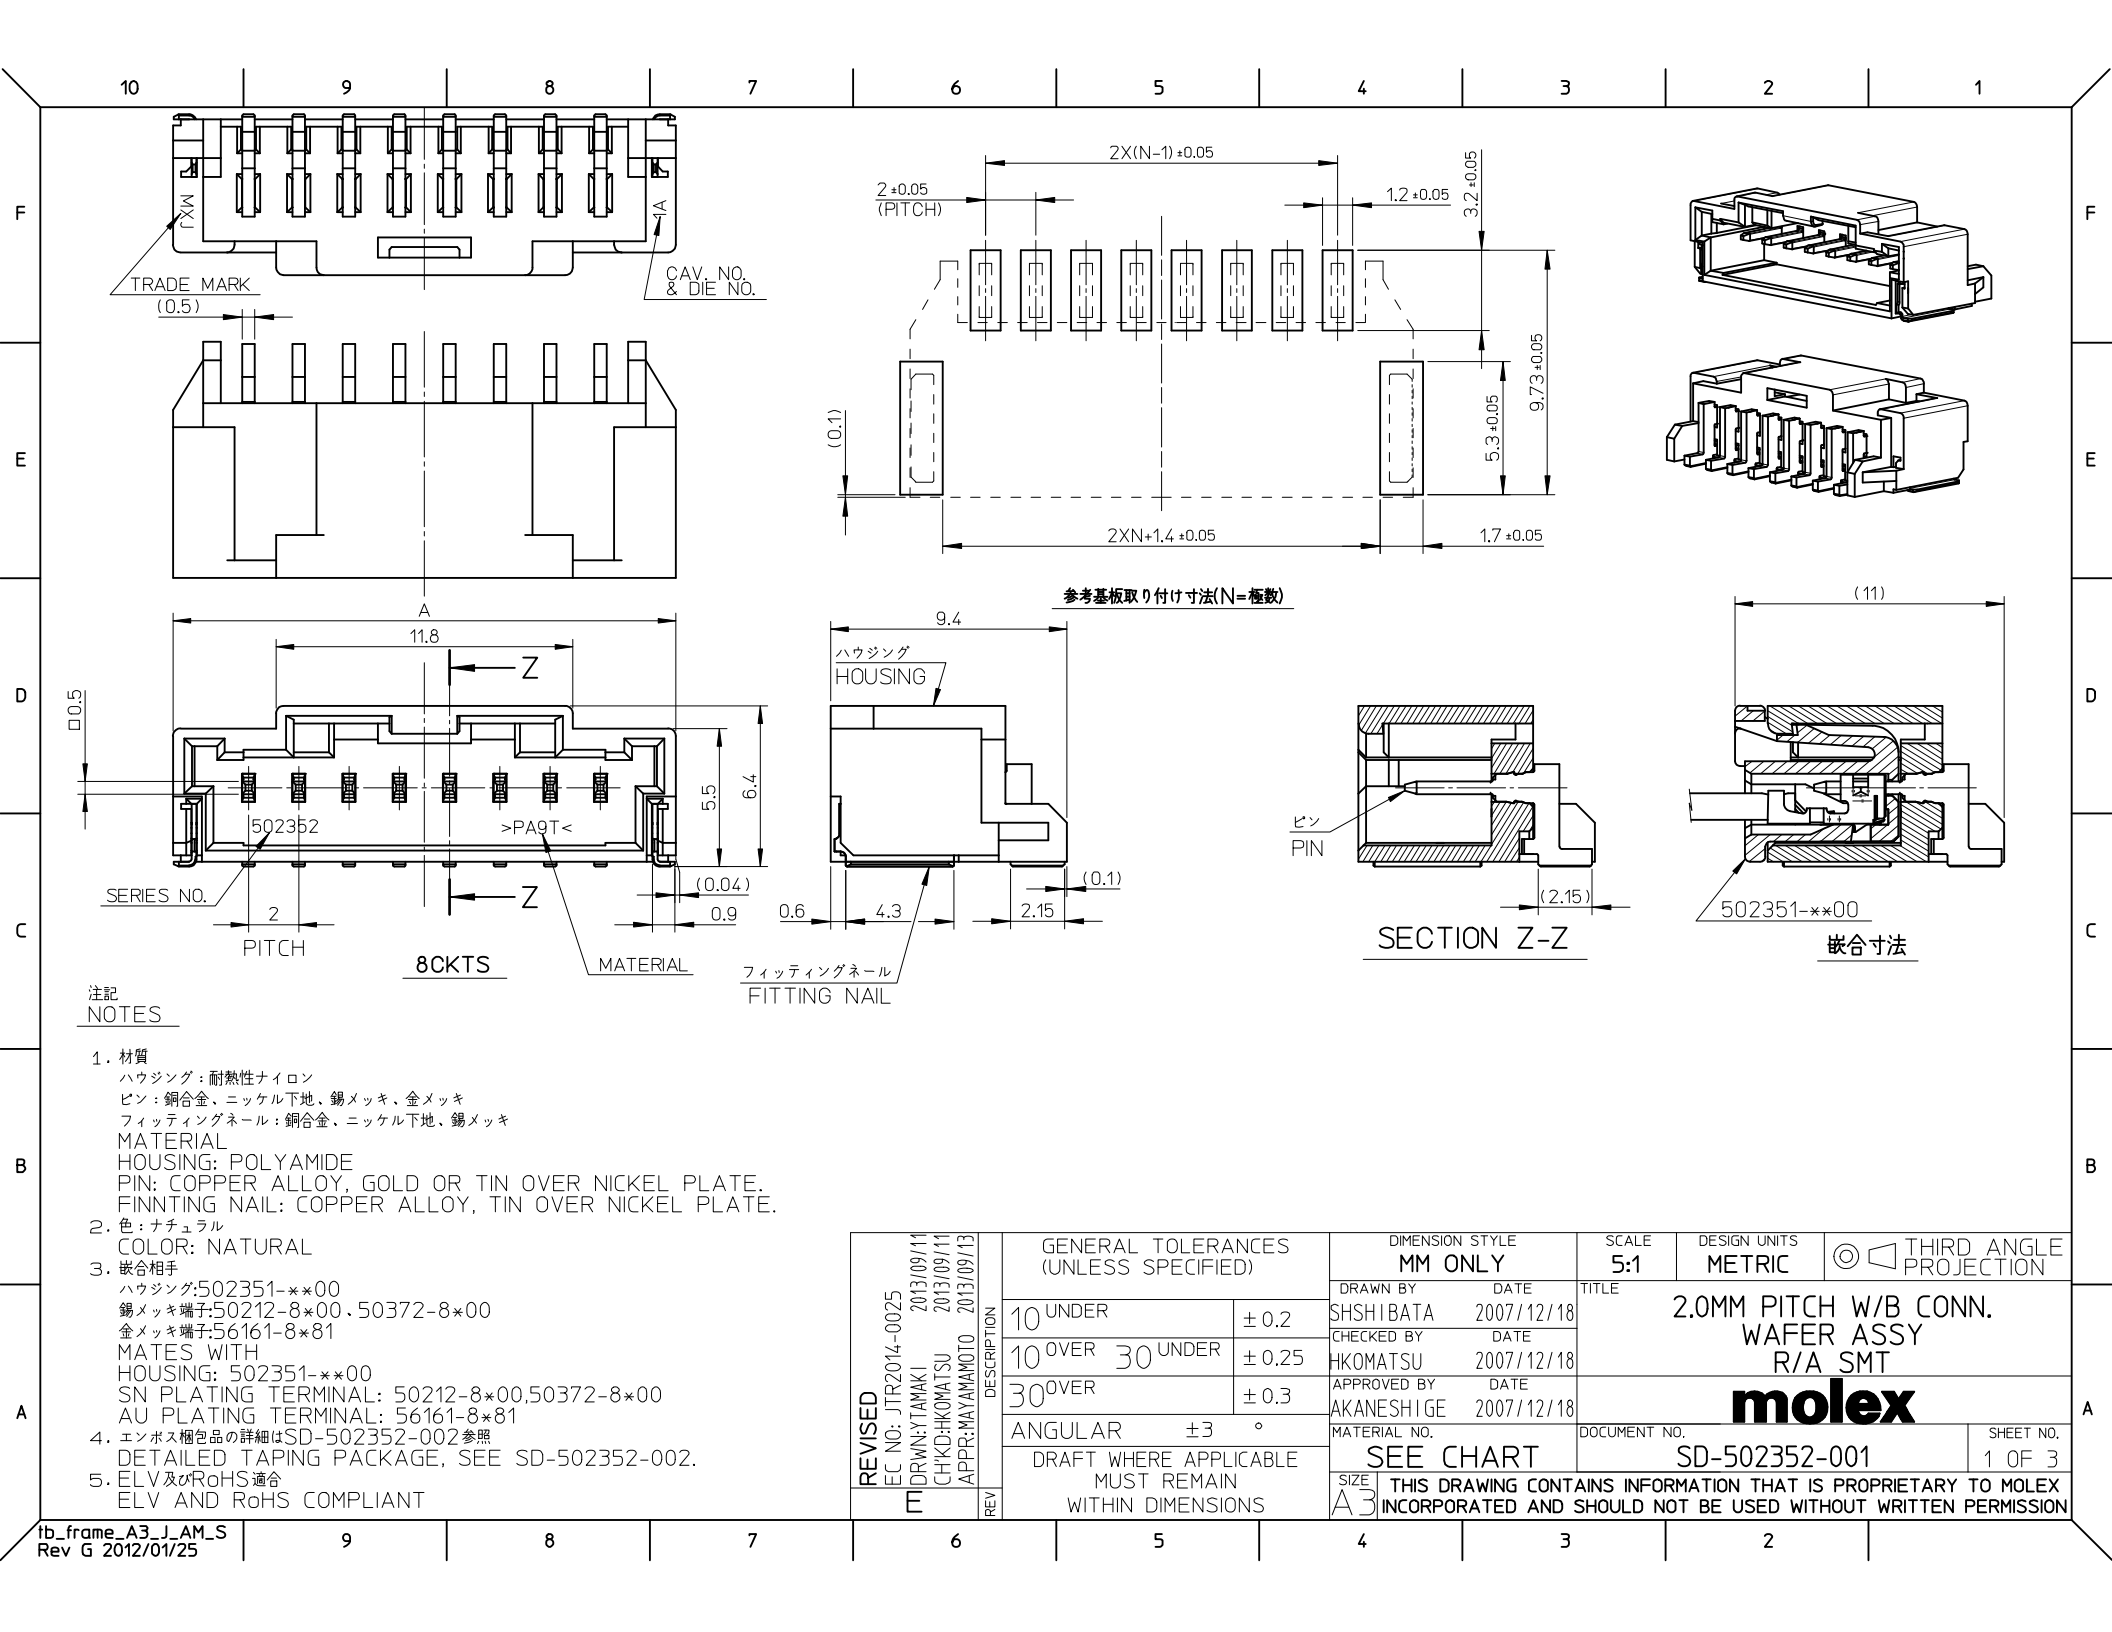

|   | 10                               | 9    | 8                          | 7    | 6                                | 5    | 4                          | 3    | 2 | 1 |  |
|---|----------------------------------|------|----------------------------|------|----------------------------------|------|----------------------------|------|---|---|--|
| F | Sn                               | 32.0 | 502352-1400                | 15   | Au                               | 32.0 | 502352-1400                | 15   |   |   |  |
|   |                                  |      |                            | 14   |                                  |      |                            | 14   |   |   |  |
|   |                                  |      |                            | 13   |                                  |      |                            | 13   |   |   |  |
|   |                                  | 28.0 | 502352-1200                | 12   |                                  | 28.0 | 502352-1200                | 12   |   |   |  |
|   |                                  |      |                            | 11   |                                  |      |                            | 11   |   |   |  |
|   |                                  |      |                            | 10   |                                  |      |                            | 10   |   |   |  |
|   |                                  |      |                            | 9    |                                  |      |                            | 9    |   |   |  |
|   |                                  | 20.0 | 502352-0800                | 8    |                                  | 20.0 | 502352-0810                | 8    |   |   |  |
|   |                                  | 18.0 | 502352-0700                | 7    |                                  | 18.0 | 502352-0710                | 7    |   |   |  |
|   |                                  | 16.0 | 502352-0600                | 6    |                                  | 16.0 | 502352-0610                | 6    |   |   |  |
| E |                                  | 14.0 | 502352-0500                | 5    |                                  | 14.0 | 502352-0510                | 5    |   |   |  |
|   |                                  | 12.0 | 502352-0400                | 4    |                                  | 12.0 | 502352-0410                | 4    |   |   |  |
|   |                                  | 10.0 | 502352-0300                | 3    |                                  | 10.0 | 502352-0310                | 3    |   |   |  |
|   |                                  | 8.0  | 502352-0200                | 2    |                                  | 8.0  | 502352-0210                | 2    |   |   |  |
|   |                                  |      |                            |      |                                  |      |                            |      |   |   |  |
|   | PLATING                          | A    | EMBOSSED PACKAGE ORDER NO. | CKTS | PLATING                          | A    | EMBOSSED PACKAGE ORDER NO. | CKTS |   |   |  |
|   | CONNECTOR SERIES NO. 502352-**08 |      |                            |      | CONNECTOR SERIES NO. 502352-**18 |      |                            |      |   |   |  |

|   |  |  |  |  |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|--|--|--|--|
| D |  |  |  |  |  |  |  |  |  |  |  |
| C |  |  |  |  |  |  |  |  |  |  |  |
| B |  |  |  |  |  |  |  |  |  |  |  |
| A |  |  |  |  |  |  |  |  |  |  |  |

|                                                                                                                   |                                                            |                                       |           |                            |                                                                                                                                  |                                                         |                        |                           |  |  |
|-------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|---------------------------------------|-----------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------|---------------------------|--|--|
| REVISED<br>EC NO: JTR2014-0025<br>DRWN:YAMAKI 2013/09/11<br>CHKD:HKOMATSU 2013/09/11<br>APPR: MAYAMOTO 2013/09/13 | DESCRIPTION                                                | GENERAL TOLERANCES (UNLESS SPECIFIED) |           | DIMENSION STYLE<br>MM ONLY |                                                                                                                                  | SCALE<br>5:1                                            | DESIGN UNITS<br>METRIC | THIRD ANGLE<br>PROJECTION |  |  |
|                                                                                                                   |                                                            | 10 UNDER                              | ± 0.2     | DRAWN BY<br>SHSHIBATA      | DATE<br>2007/12/18                                                                                                               | TITLE<br>2.0MM PITCH W/B CONN.<br>WAFER ASSY<br>R/A SMT |                        |                           |  |  |
|                                                                                                                   |                                                            | 10 OVER 30 UNDER                      | ± 0.25    | CHECKED BY<br>HKOMATSU     | DATE<br>2007/12/18                                                                                                               |                                                         |                        |                           |  |  |
|                                                                                                                   |                                                            | 30 OVER                               | ± 0.3     | APPROVED BY<br>AKANESHIGE  | DATE<br>2007/12/18                                                                                                               | DOCUMENT NO.<br>SD-502352-001                           |                        |                           |  |  |
|                                                                                                                   |                                                            | ANGULAR ±3 °                          |           | MATERIAL NO.               |                                                                                                                                  |                                                         |                        |                           |  |  |
|                                                                                                                   | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |                                       | SEE CHART |                            | SD-502352-001                                                                                                                    |                                                         |                        |                           |  |  |
|                                                                                                                   | REV                                                        |                                       |           | SIZE<br>A3                 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                                                         |                        |                           |  |  |



