


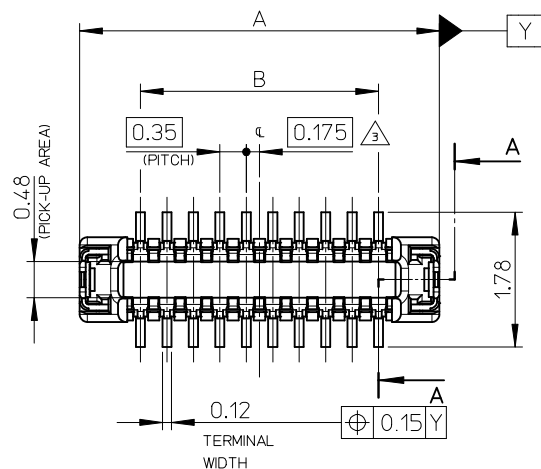


10 9 8 7 6 5 4 3 2 1



SECTION A-A

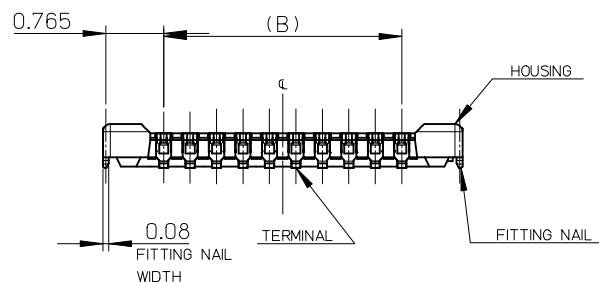

注記 NOTES

1. 使用材料 MATERIAL

ハウジング : 液晶ポリマー (LCP) UL94V-0 (黒)
HOUSING: LIQUID CRYSTAL POLYMER UL94V-0 (COLOR: BLACK)

ターミナル : 銅合金
TERMINAL : COPPER ALLOY

金具 : 銅合金
FITTING NAIL : COPPER ALLOY

2. メッキ仕様 PLATING

ターミナル TERMINAL

金メッキ
GOLD

下地メッキ : ニッケルメッキ
UNDER PLATING : NICKEL

※コンタクト部とテール部はニッケルメッキによって分断されている金メッキです。
DIVIDE INTO PARTS THE GOLD PLATING OF THE CONTACT AND THE TAIL PART BY THE NICKEL PLATING.

金具 FITTING NAIL

金メッキ (テール部のみ)
GOLD (ONLY TAIL PART)

下地メッキ : ニッケルメッキ
UNDER PLATING : NICKEL

△ (全極数 / 2) = 偶数の場合に適用。
APPLY FOR (CIRCUIT / 2) = EVEN.

4. 嵌合相手 : 504008 シリーズ
MATE WITH : 504008 SERIES.

5. テール平坦度は、0.08 以下

テール及び金具の平坦度は、0.1 以下
TAIL COPLANARITY TO BE 0.08 MAXIMUM.
TAIL AND FITTING NAIL COPLANARITY TO BE 0.1 MAXIMUM.

6. ELV & RoSH 適合品
ELV and RoSH COMPLIANT

1.4	3.01	504011-1010	10
B	A	EMBOSSED PACKAGE	極数 CIRCUITS
		オーダー番号 ORDER No.	
		CONNECTOR SERIES No. : 504011-**09	

RELEASED EC NO: J2013-0281 DRWN:TTANIGUCHI012012/09/04 CHKD:RTAKEUCHI 2012/09/04 APPR:MSASAO 2012/09/05	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 15:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY TTANIGUCHI01		DATE 2012/09/04	TITLE 0.35 B-TO-B CONN HGT=0.7 PLUG ASSY 035ST7			
		10 OVER 30 UNDER	±0.25	CHECKED BY RTAKEUCHI		DATE 2012/09/04				
		30 OVER	±0.3	APPROVED BY MSASAO		DATE 2012/09/05				
		ANGULAR	±1°	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-504011-001		SHEET NO. 1 OF 2		
	REV A	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

9 8 7 6 5 4 3 2

10 9 8 7 6 5 4 3 2 1

F

F

E

E

D

D

C


C

B


B

A

A

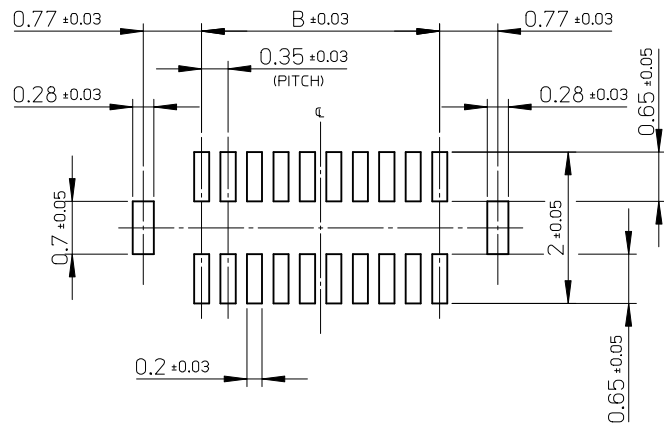

RECOMMENDED P.W. BOARD
PATTERN LAYOUT

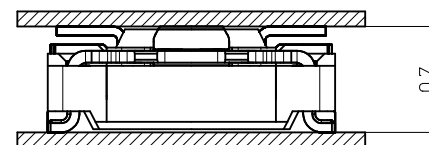


MATED DRAWING
(SCALE 30:1)

RELEASED EC NO: J2013-0281 DRWN: TTANIGUCHI 2012/09/04 CHKD: RTAKEUCHI 2012/09/04 APPR: MSASAO 2012/09/05	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 15:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	±0.2	DRAWN BY TTANIGUCHI		DATE 2012/09/04			TITLE 0.35 B-TO-B CONN HGT=0.7 PLUG ASSY 035ST7
		10 OVER	±0.25	CHECKED BY RTAKEUCHI		DATE 2012/09/04			
		30 OVER	±0.3	APPROVED BY MSASAO		DATE 2012/09/05			
		ANGULAR ±1 °		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-504011-001			
	REV A	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					


9 8 7 6 5 4 3 2

注記 NOTES


- 製品詳細寸法については製品単体図面を参照下さい。
RE DETAILED DIMENSION, SEE PRODUCT DRAWING.
- 梱包数量：3000 個／リール
NUMBER OF CONNECTORS：3000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

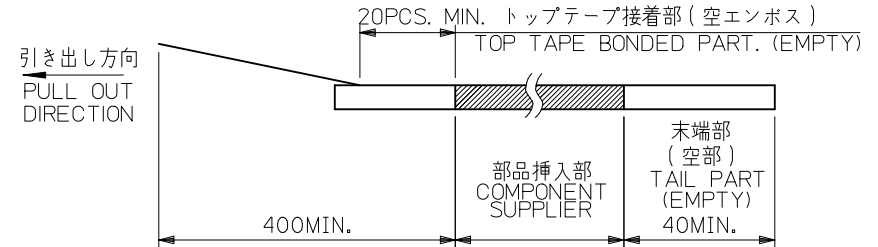

- トップテープの剥離強度：0.1N~1.3N(10gf~130gf)
(剥離方向は下図参照)
尚、本規格値は出荷時に適用。(但し、輸送時に剥離が発生しないこと。)
PEELING OFF FORCE OF TOP TAPE：0.1N~1.3N(10gf~130gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTION.

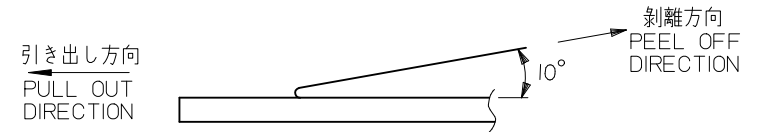

- 材料 MATERIAL
キャリアテープ (CARRIER TAPE)：ポリスチレン (POLYSTYRENE)
トップテープ (TOP TAPE)：PET, OTHER
リール (REEL)：ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
- ELV 及び RoHS適合品
ELV AND RoHS COMPLIANT

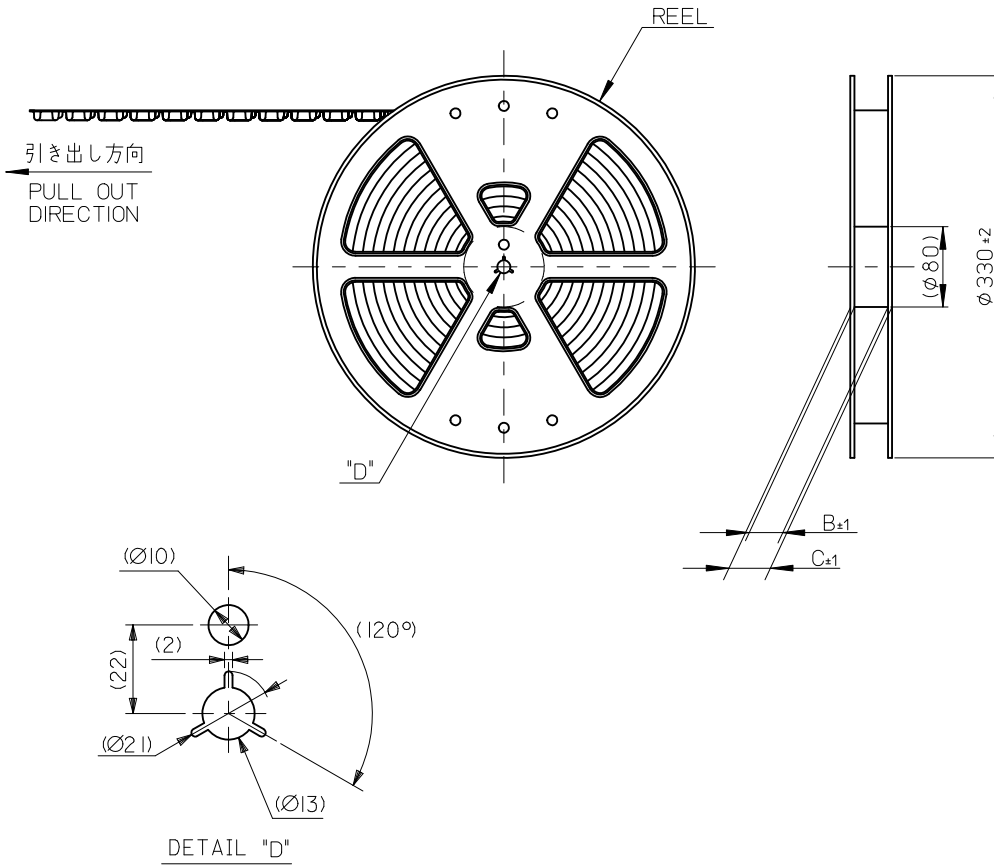

RELEASED EC NO: J2012-1336 DRWN:TTANIGUCHI012012/04/17 CHKD:RTAKEUCHI 2012/05/16 APPR:MSASAO 2012/05/17	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER ± ---		DRAWN BY DATE		TITLE 0.35 B-T0-B CONN HGT=0.7 PLUG ASSY EMBSTP PKG 035ST7			
		10 OVER 30 UNDER ± ---		CHECKED BY DATE					
		30 OVER ± ---		RTAKEUCHI 2012/05/16					
		ANGULAR ±1 °		APPROVED BY DATE					
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-504011-002		SHEET NO. 1 OF 2	
				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

10

9

8

7

6

5

4

3

2

1

F


E

D



C

B

A

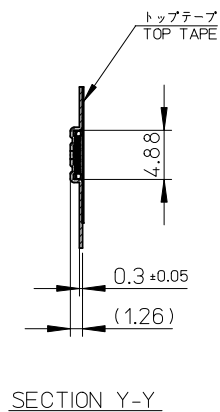

引き出し方向
PULL OUT DIRECTION

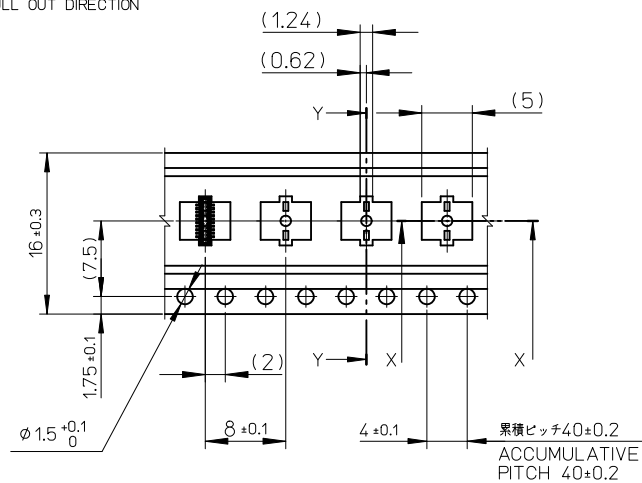

16mm 幅キャリアテープ
16mm WIDTH CARRIER TAPE

16	21.4	17.4	3.13	504011-1010	10
キャリアテープ幅 CARRIER TAPE WIDTH		C	B	(A)	CTK.
		MODEL No.		504011-**10	

RELEASED EC NO.: J2012-1336 DRWN: TANIGUCHI 2012/04/17 CHKD: RTAKEUCHI 2012/05/16 APPR: MSASAO 2012/05/17 A	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER ± ---		DRAWN BY TTANIGUCHI		TITLE 0.35 B-TO-B CONN HGT=0.7 PLUG ASSY EMBSTP PKG 035ST7 molex			
		10 OVER 30 UNDER ± ---		DATE 2012/04/17					
		30 OVER ± ---		CHECKED BY RTAKEUCHI					
		ANGULAR ±1 °		DATE 2012/05/16					
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY		DOCUMENT NO. SD-504011-002		SHEET NO. 2 OF 2		
			MATERIAL NO. SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

9

8

7

6

5

4

3

2