

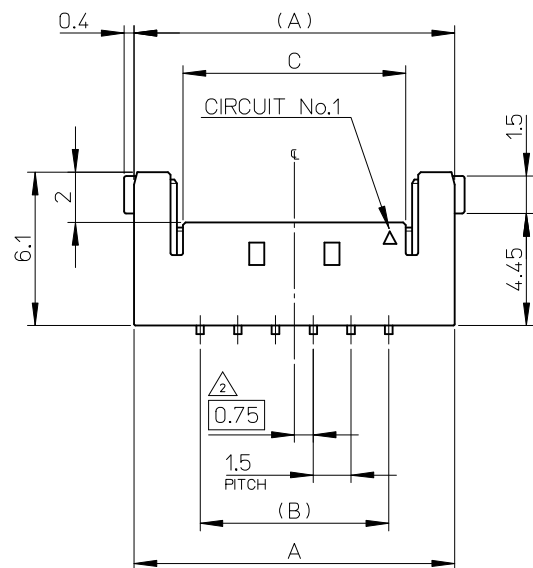


10 9 8 7 6 5 4 3 2 1

NOTE.

1. 嵌合相手: 504051****
MATE WITH: 504051****
偶数極の製品に適用
APPLY EVEN CIRCUIT PRODUCTS.
3. 材質
MATERIAL
ハウジング: 耐熱性樹脂 UL94-V0 BLACK
HOUSING: HEATPROOF RESIN UL94-V0 BLACK
ターミナル: 銅合金
TERMINAL: COPPER ALLOY
ネール: 銅合金
NAIL: COPPER ALLOY
4. メッキ
PLATING
ターミナル: 下地 ニッケルメッキ、コンタクト・半田付け部 金メッキ
TERMINAL: UNDER NICKEL PLATING
CONTACT AND TAIL GOLD PLATING
ネール: 下地 ニッケルメッキ、錫メッキ
NAIL: UNDER NICKEL PLATING, TIN PLATING
5. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT.



14.85	13.5	18.75	5040501091	10
11.85	10.5	15.75	5040500891	8
10.35	9.0	14.25	5040500791	7
8.85	7.5	12.75	5040500691	6
5.85	4.5	9.75	5040500491	4
C	B	A	EMBOSSED PACKAGE	CIRCUIT
			ORDER No.	
CONNECTOR SERIES No. : 504050**91				

REVISED EC NO: J2013-1111 DRWN: YMAKE CHKD: APPR: NUKITA 2013/04/23 2013/05/21	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	± 0.2	DRAWN BY THANYU	DATE 2012/03/29	TITLE 1.5 WIRE TO BOARD CONN. R/A H=2MM HEADER ASS'Y molex		
		10 OVER 30 UNDER	± 0.25	CHECKED BY KASAKAWA	DATE 2012/03/29			
		30 OVER	± 0.3	APPROVED BY Y01TO	DATE 2012/04/18			
		ANGULAR ±3 °		MATERIAL NO.				
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-504050-001		1 OF 2
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

9 8 7 6 5 4 3 2

10 9 8 7 6 5 4 3 2 1

F


E

D


C

B

A

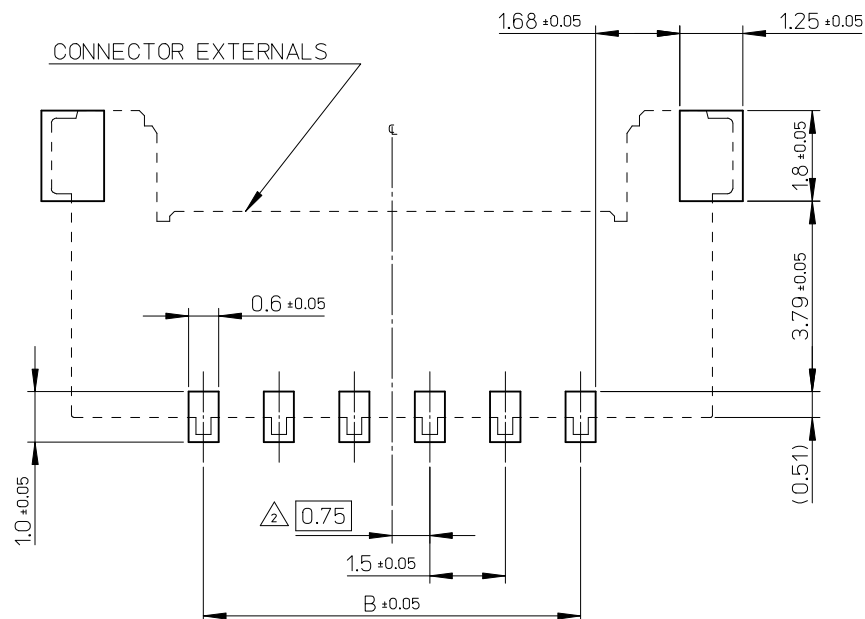

RECOMMENDED PATTERN LAYOUT (REF.)

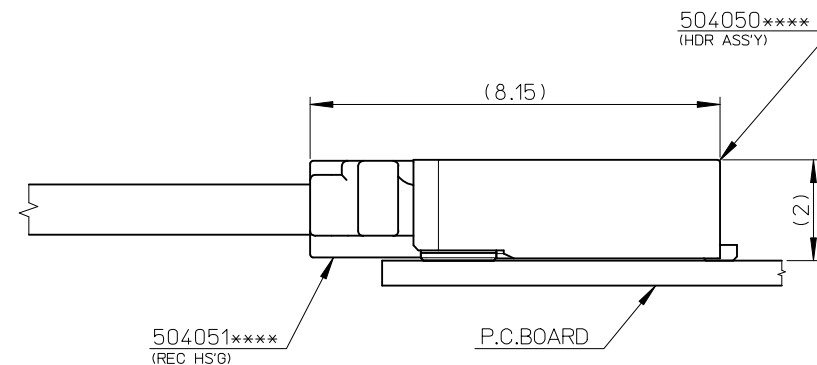

MATED CONNECTORS

REVISED EC NO: J2013-1111 DRWN:YMAKE CHKD: APPR:NUKITA	DESCRIPTION 10 UNDER 10 OVER 30 UNDER 30 OVER ANGULAR ±3 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	± 0.2	DRAWN BY THANYU	DATE 2012/03/29	TITLE 1.5 WIRE TO BOARD CONN. R/A H=2MM HEADER ASS'Y molex		
		10 OVER 30 UNDER	± 0.25	CHECKED BY KASAKAWA	DATE 2012/03/29			
		30 OVER	± 0.3	APPROVED BY YOITO	DATE 2012/04/18			
				MATERIAL NO. SEE CHART	DOCUMENT NO. SD-504050-001	SHEET NO. 2 OF 2		

F

E

D

C

B

A

10 9 8 7 6 5 4 3 2 1

F

F

E

E

D

D

C





C

B

B


A

A

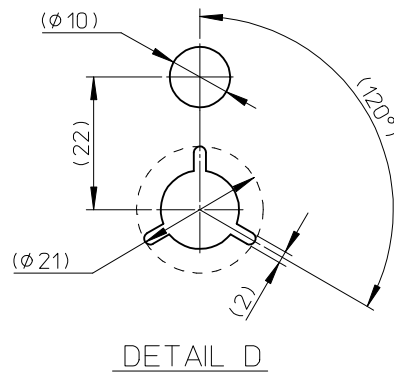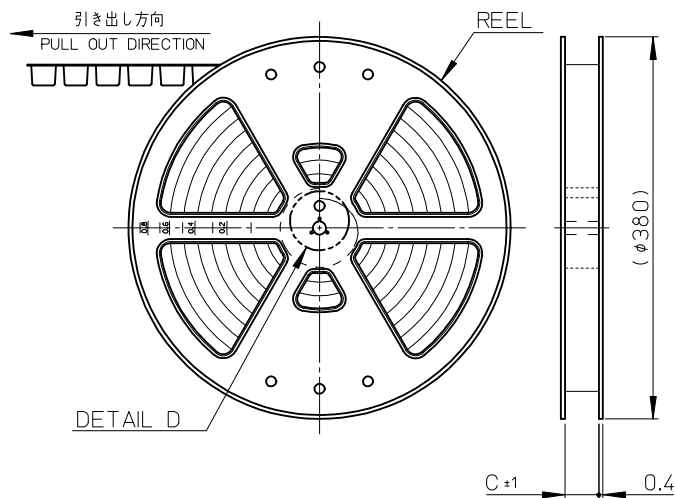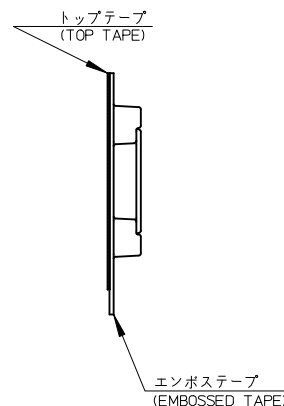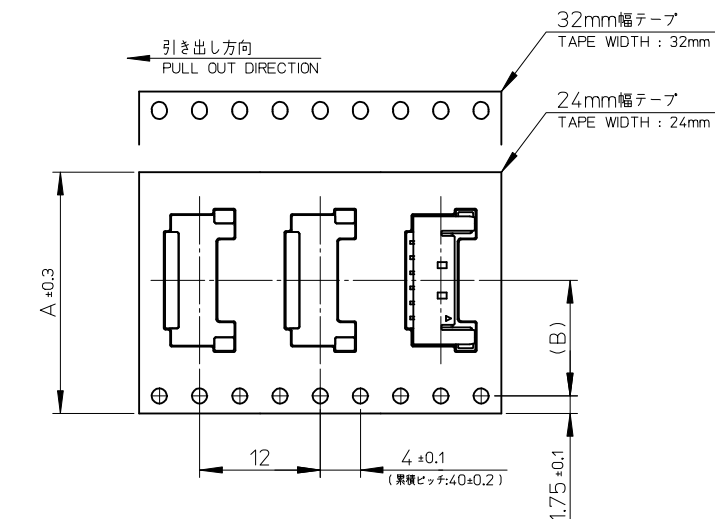

NOTE

- 梱包数量 : 2700個 / リール
NUMBER OF CONNECTORS : 2700 PIECES/REEL
- リードテープ長さ
LEAD TAPE LENGTH

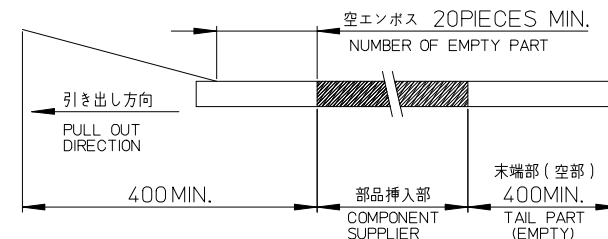

- 材料
MATERIALS
キャリアテープ : ポリスチレン
CARRIER TAPE : POLYSTYRENE
トップテープ : ポリエステル、ポリエチレン、ポリエチレンテレフタレート
TOP TAPE : POLYESTER, POLYETHYLENE, POLYETHYLENE TEREPHTHALATE
リール : ポリスチレン (リサイクル材を含む)
REEL : POLYSTYRENE (RECYCLE MATERIAL CONTAINED)
- 製品詳細寸法については、RSD-504050-001を参照して下さい。
PLEASE REFER TO RSD-504050-001 FOR THE DETAILED DIMENSION OF THE CONNECTOR.
- ELV及びRoHS適合品
ELV AND RoHS COMPLIANT.
- トップテープの剥離強度については、IEC60286-3に準拠の事。
TOP TAPE PEEL FORCE IS DEFINED BY IEC60286-3.

33.5	14.2	32	5040501091	10
33.5	14.2	32	5040500891	8
25.5	11.5	24	5040500791	7
25.5	11.5	24	5040500691	6
25.5	11.5	24	5040500491	4
C	B	A WIDTH OF TAPE	ORDER No.	CIRCUIT

REVISED EC NO: J2013-1111 DRWN: YWAKE CHKD: APPR: NUKITA	DESCRIPTION 2013/04/23 2013/05/21	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
		10 UNDER	± 0.2	DRAWN BY THANYU	DATE 2012/03/29	TITLE EMBOSSED TAPE PACKAGE FOR 504050-**** (1.5 W/B CONN. H=2MM)					
		10 OVER 30 UNDER	± 0.25	CHECKED BY KASAKAWA	DATE 2012/03/29						
		30 OVER	± 0.3	APPROVED BY YOITO	DATE 2012/04/18						
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO. SD-504050-002				SHEET NO. 1 OF 1	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART							
	REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						