

Number of contacts

# 10-50



## Pcb transition connector, 4 rows


| Identification | No. of contacts | Part No. | Drawing | Dimensions in mm |
|----------------|-----------------|----------|---------|------------------|
|----------------|-----------------|----------|---------|------------------|

Pcb transition connector<sup>2)</sup>


4 rows

|    |                 |
|----|-----------------|
| 10 | 09 19 010 9643* |
| 16 | 09 19 016 9643* |
| 20 | 09 19 020 9643* |
| 26 | 09 19 026 9643* |
| 34 | 09 19 034 9643* |
| 40 | 09 19 040 9643* |
| 50 | 09 19 050 9643* |

| No. of contacts | A     | B                        |
|-----------------|-------|--------------------------|
| 10              | 17.78 | $1.27 \times 9 = 11.43$  |
| 16              | 25.40 | $1.27 \times 15 = 19.05$ |
| 20              | 30.48 | $1.27 \times 19 = 24.13$ |
| 26              | 38.10 | $1.27 \times 25 = 31.75$ |
| 34              | 48.26 | $1.27 \times 33 = 41.91$ |
| 40              | 55.88 | $1.27 \times 39 = 49.53$ |
| 50              | 68.58 | $1.27 \times 49 = 62.23$ |

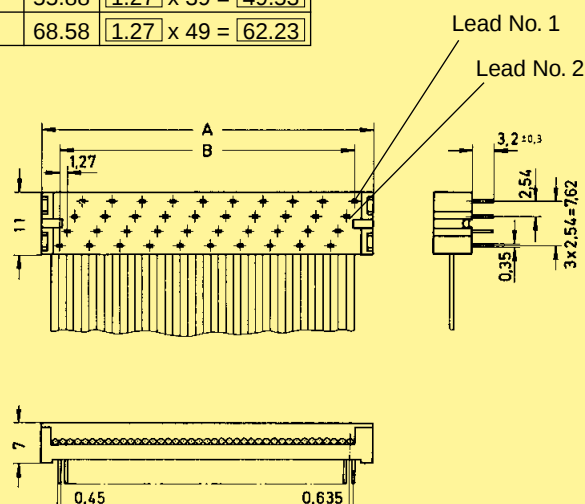

## Board drillings

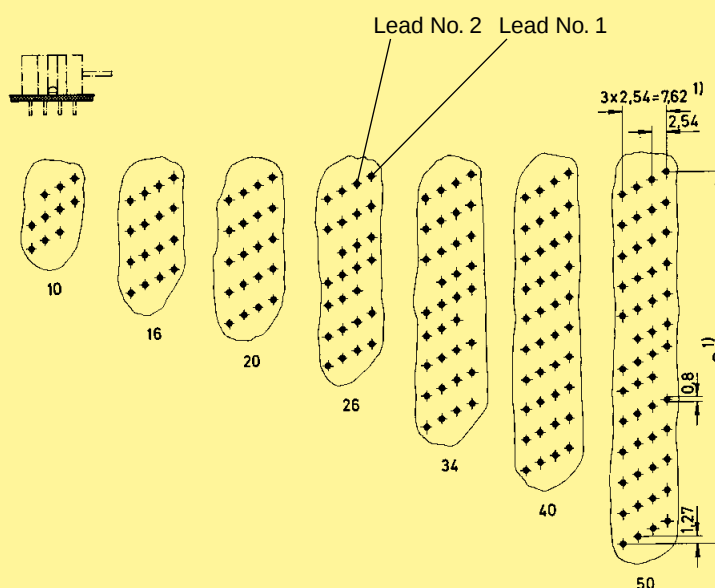

\* Not normally kept in stock.

<sup>1)</sup> Pitch tolerance:  $\pm 0.1$

<sup>2)</sup> Not released for halogen free flat cables