

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F



E

D


C

B


A

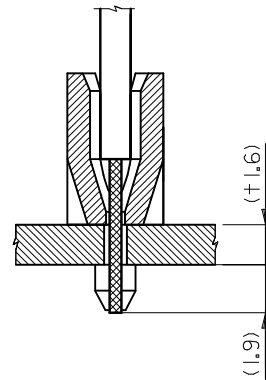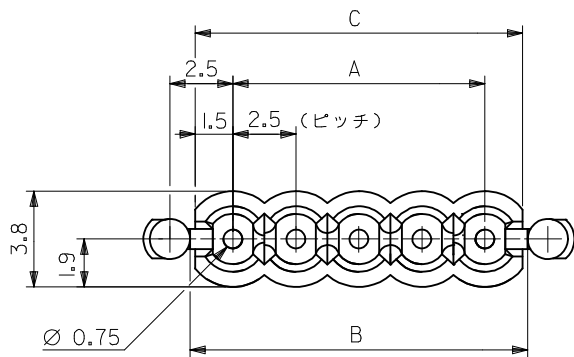



電線挿入図

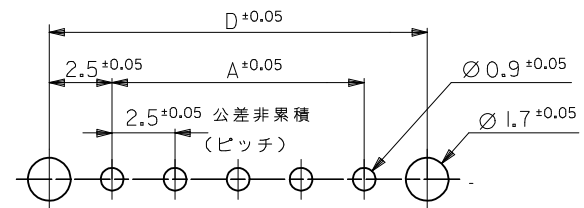

基板取付穴推奨寸法
($\pm 1.6 \pm 0.05$)

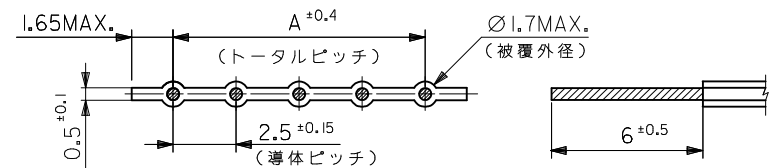

適合電線推奨寸法

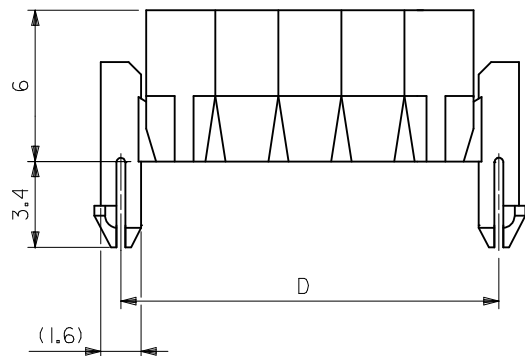

42.5	40.5	40.9	37.5	51052-1600	16
40.0	38.0	38.4	35.0	1500	15
37.5	35.5	35.9	32.5	1400	14
35.0	33.0	33.4	30.0	1300	13
32.5	30.5	30.9	27.5	1200	12
30.0	28.0	28.4	25.0	1100	11
27.5	25.5	25.9	22.5	1000	10
25.0	23.0	23.4	20.0	0900	9
22.5	20.5	20.9	17.5	0800	8
20.0	18.0	18.4	15.0	0700	7
17.5	15.5	15.9	12.5	0600	6
15.0	13.0	13.4	10.0	0500	5
12.5	10.5	10.9	7.5	0400	4
10.0	8.0	8.4	5.0	-0300	3
7.5	5.5	5.9	2.5	51052-0200	2
D	C	B	A	ENG. NO.	極数

注記

- 材料：ナイロン66，UL 94V-2
- 適合電線：2.5mmピッチリボンケーブル
AWG#24～26錫コート平行線
- 生産国(トレードマーク)：日本(MXJ-大和，MXH-塩谷)
マレーシア(MXL)
- 適用電線被覆外形： $\phi 1.7\text{MAX.}$

REVISED EC NO: J2014-0288 2013/09/04 DRWN:SSAT002 2013/09/04 CHKD:KASAKAWA 2013/09/04 APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY T. ITOH	DATE '97/7/4	TITLE 2.5MM PITCH CABLE HOLDER (FOR 6 MM STRIP LENGTH)				
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. FUKUSHIMA	DATE '97/7/4					
		30 OVER	± 0.3	APPROVED BY NUKITA	DATE 2013/09/04					
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.				SHEET NO.
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-51052-**00				1 OF 2	
	REV			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F



E

D


C

B


A

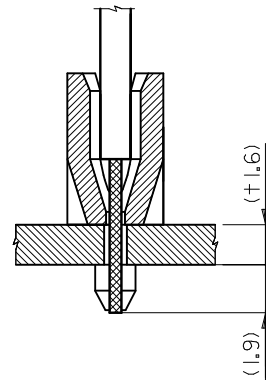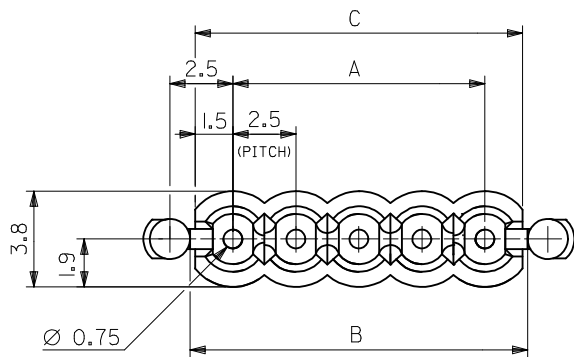



SECT.(CABLE ASS'Y)

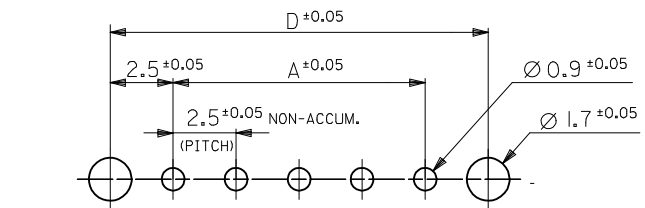

RECOMMENDED P.C. BOARD HOLE DIM.
($\pm 1.6 \pm 0.05$)

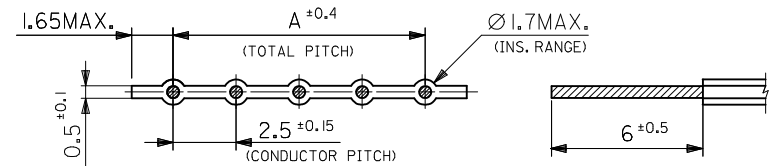

RECOMMENDED WIRE DIM.


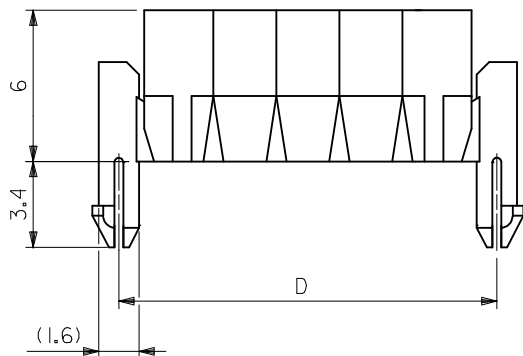


42.5	40.5	40.9	37.5	51052-1600	16
40.0	38.0	38.4	35.0	1500	15
37.5	35.5	35.9	32.5	1400	14
35.0	33.0	33.4	30.0	1300	13
32.5	30.5	30.9	27.5	1200	12
30.0	28.0	28.4	25.0	1100	11
27.5	25.5	25.9	22.5	1000	10
25.0	23.0	23.4	20.0	0900	9
22.5	20.5	20.9	17.5	0800	8
20.0	18.0	18.4	15.0	0700	7
17.5	15.5	15.9	12.5	0600	6
15.0	13.0	13.4	10.0	0500	5
12.5	10.5	10.9	7.5	0400	4
10.0	8.0	8.4	5.0	-0300	3
7.5	5.5	5.9	2.5	51052-0200	2
D	C	B	A	ENG. NO.	CKT.




NOTES

1. MATERIAL : NYLON 66, UL 94V-2
2. APPLIED WIRE : 2.5mm PITCH RIBBON CABLE
AWG#24~26
TIN TOP COATED WIRE
3. PLACE OF MANUFACTURE (TRADE-MARK) :
JAPAN (MXJ-YAMATO, MXH-SHIOYA)
MALAYSIA (MXL)
4. APPLICABLE WIRE INS. RANGE $\phi 1.7$ MAX.


REVISED EC NO: J2014-0288 DRWN: SAT002 CHKD: KASAKAWA APPR: NUKITA 2013/09/04 2013/09/04 2013/09/04	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION						
		10 UNDER	± 0.2	DRAWN BY T. ITO	DATE '97/7/4	TITLE 2.5MM PITCH CABLE HOLDER (FOR 6MM STRIP LENGTH)								
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. FUKUSHIMA	DATE '97/7/4									
		30 OVER	± 0.3	APPROVED BY NUKITA	DATE 2013/09/04	molex								
		ANGULAR ±3 °		MATERIAL NO.							DOCUMENT NO.			SHEET NO.
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-51052-**-00						2 OF 2			
	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												

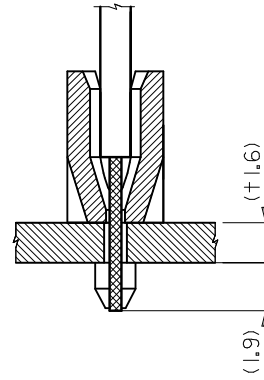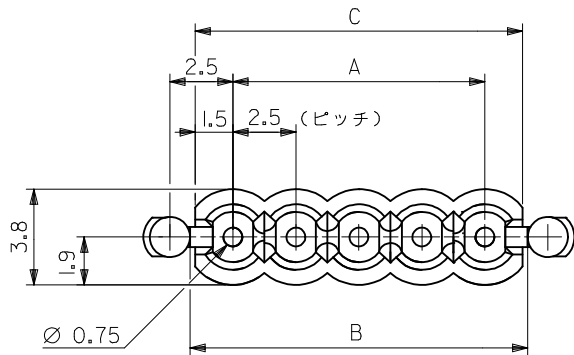

電線挿入図

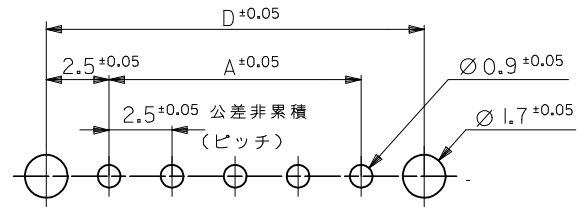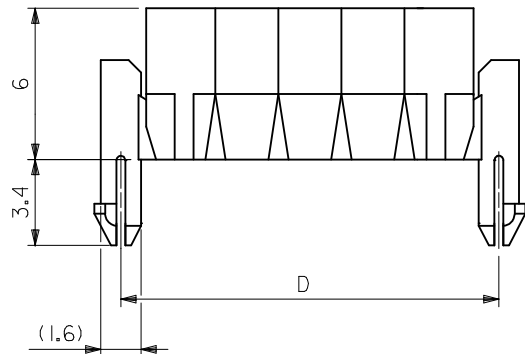

基板取付穴推奨寸法
($\pm 1.6 \pm 0.05$)

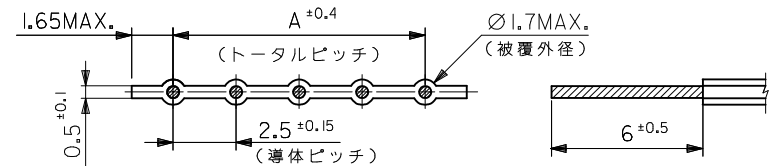

適合電線推奨寸法

42.5	40.5	40.9	37.5	51052-1600	16
40.0	38.0	38.4	35.0	1500	15
37.5	35.5	35.9	32.5	1400	14
35.0	33.0	33.4	30.0	1300	13
32.5	30.5	30.9	27.5	1200	12
30.0	28.0	28.4	25.0	1100	11
27.5	25.5	25.9	22.5	1000	10
25.0	23.0	23.4	20.0	0900	9
22.5	20.5	20.9	17.5	0800	8
20.0	18.0	18.4	15.0	0700	7
17.5	15.5	15.9	12.5	0600	6
15.0	13.0	13.4	10.0	0500	5
12.5	10.5	10.9	7.5	0400	4
10.0	8.0	8.4	5.0	-0300	3
7.5	5.5	5.9	2.5	51052-0200	2
D	C	B	A	ENG. NO.	極数

注記

- 材料：ナイロン66, UL 94V-2
- 適合電線：2.5mmピッチリボンケーブル
AWG #24 ~ 26 錫コート平行線
- 生産国 (トレードマーク)：日本 (MXJ-大和, MXH-塩谷)
マレーシア (MXL)
- 適用電線被覆外形： $\phi 1.7 \text{ MAX.}$

REVISED EC NO.: J2014-0288 2013/09/04 DRWN:SSAT002 2013/09/04 CHKD:KASAKAWA 2013/09/04 APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY T. ITOH	DATE '97/7/4	TITLE 2.5MM PITCH CABLE HOLDER (FOR 6 MM STRIP LENGTH)				
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. FUKUSHIMA	DATE '97/7/4					
		30 OVER	± 0.3	APPROVED BY NUKITA	DATE 2013/09/04	molex				
		ANGULAR ±3 °		MATERIAL NO.						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-51052-**00			1 OF 2		
	REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F



E

D


C

B


A

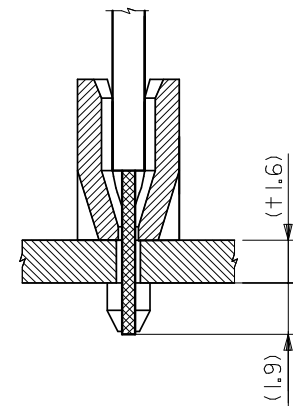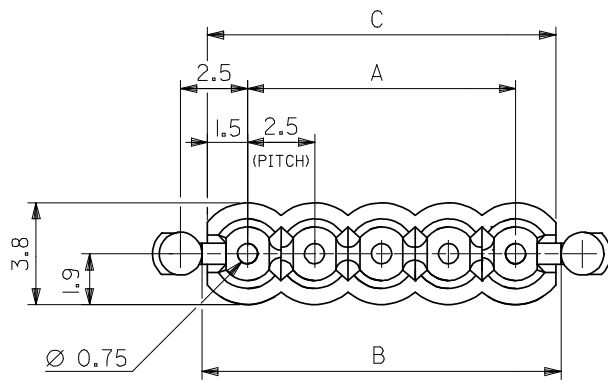



SECT.(CABLE ASS'Y)

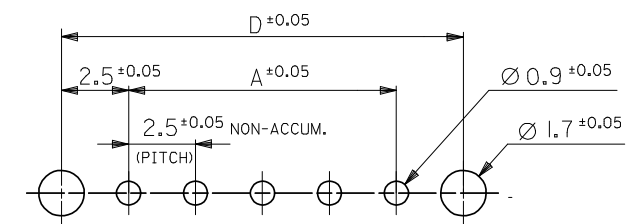

RECOMMENDED P.C. BOARD HOLE DIM.
($\pm 1.6 \pm 0.05$)

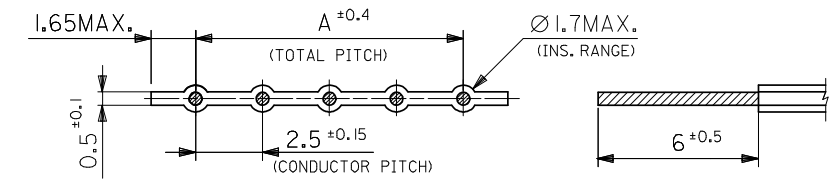

RECOMMENDED WIRE DIM.

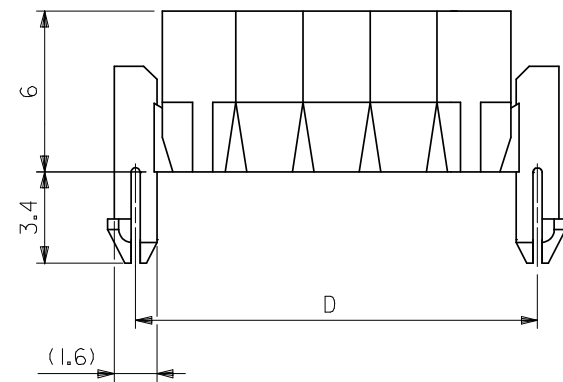

NOTES

1. MATERIAL : NYLON 66, UL 94V-2
2. APPLIED WIRE : 2.5mm PITCH RIBBON CABLE
AWG#24~26
TIN TOP COATED WIRE
3. PLACE OF MANUFACTURE (TRADE-MARK) :
JAPAN (MXJ-YAMATO, MXH-SHIOYA)
MALAYSIA (MXL)

42.5	40.5	40.9	37.5	VO	51052-1600	16
40.0	38.0	38.4	35.0	VO	1500	15
37.5	35.5	35.9	32.5	VO	1400	14
35.0	33.0	33.4	30.0	VO	1300	13
32.5	30.5	30.9	27.5	VO	1200	12
30.0	28.0	28.4	25.0	VO	1100	11
27.5	25.5	25.9	22.5	VO	1000	10
25.0	23.0	23.4	20.0	VO	0900	9
22.5	20.5	20.9	17.5	VO	0800	8
20.0	18.0	18.4	15.0	VO	0700	7
17.5	15.5	15.9	12.5	VO	0600	6
15.0	13.0	13.4	10.0	VO	0500	5
12.5	10.5	10.9	7.5	VO	0400	4
10.0	8.0	8.4	5.0		-0300	3
7.5	5.5	5.9	2.5	VO	51052-0200	2
D	C	B	A	ENG. NO.		CKT.

REVISED EC NO: J2008-2948 DRWN:NAKAMURAA 2008/03/31 CHKD:T. HARUYAMA 2008/04/22 APPR:NUKITA 2008/06/03	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY T. ITOH		DATE	TITLE 2.5MM PITCH CABLE HOLDER (FOR 6MM STRIP LENGTH)			
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. FUKUSHIMA		DATE '97/7/14				
		30 OVER	± 0.3	APPROVED BY M. FUKUSHIMA		DATE '97/7/14	MOLEX INCORPORATED			
		ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-51052-001		2 OF 2		
				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					