
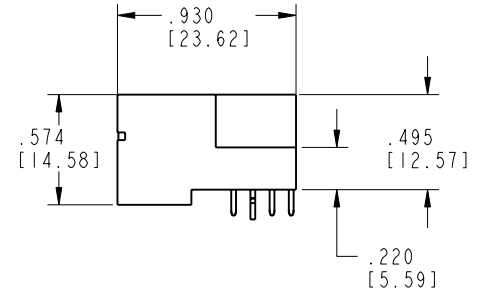
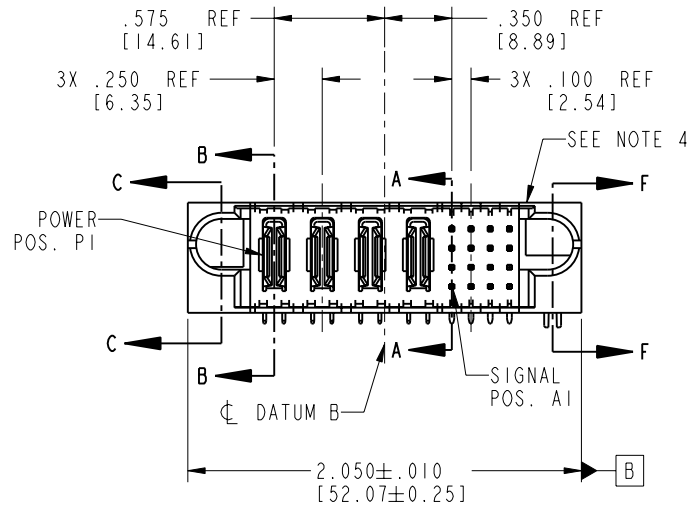



Tous droits strictement réservés. Reproduction ou communication o des liers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.

FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

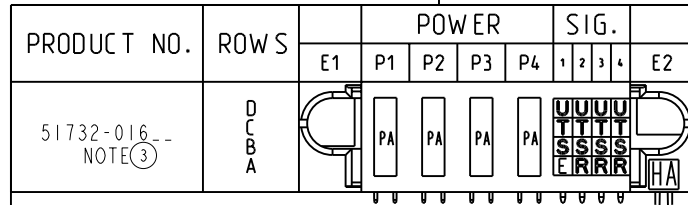

CODE	DIM "M" MATING LENGTH	CONTACT TYPE
E	.220 [5.59]	SIGNAL
R	.270 [6.86]	SIGNAL
S	.270 [6.86]	SIGNAL
T	.270 [6.86]	SIGNAL
U	.270 [6.86]	SIGNAL
PA	N/A [N/A]	POWER
HA	N/A [N/A]	HOLD-DOWN


mat'l code				SEE NOTE 2				tolerances unless otherwise specified				CUSTOMER			
lfr	ecn no.	dr	date	linear	.XX±.01/0.X±0.3				COPY						
A	V03-1013	MEM	9/8/03		.XXX±.005/0.XX±0.13				projection	title					
B	V03-1053	TAB	9/24/03		.XXX±.0020/0.XXX±0.051					4P + 16S					
C	DG05-0037	SW	03/01/05	angles	0°±2°				 INCH/MM scale 1:1	RIGHT ANGLE SOLDER HEADER					
D	DG05-0554	GuoJM	12/19/05	dr	M. MOSTOLLER	9/8/03	product family				PwrBlade				
				enrg	M. MOSTOLLER	9/8/03	code				213				
				chr	H. BREWBAKER	9/8/03	sheet				1 of 4				
				appd	M. MOSTOLLER	9/8/03	A				51732-016				
sheet index	revision sheet	D	D	D	D										
		1	2	3	4										

Tous droits strictement réservés. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.


FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.


PRODUCT NUMBER
51732-016--
NOTE ③

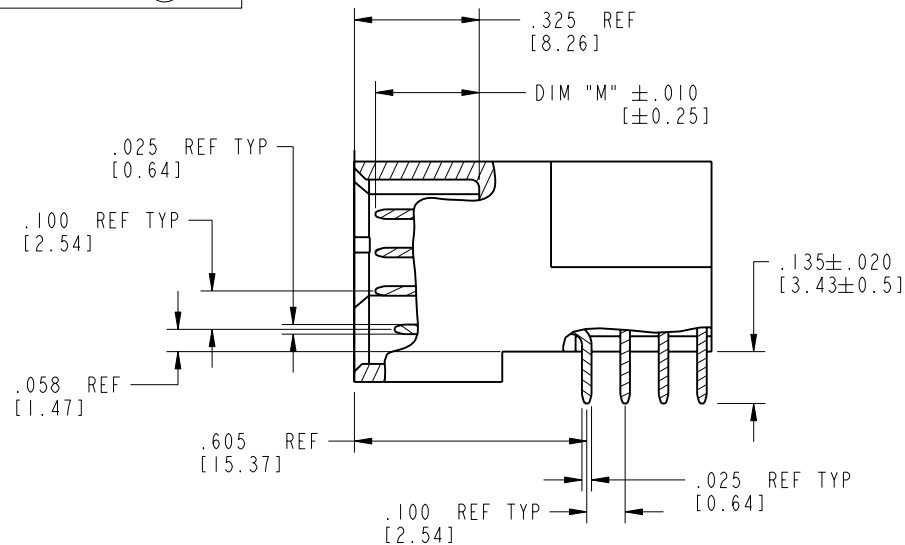


BROKEN-OUT SECTION A-A
SCALE 2:1

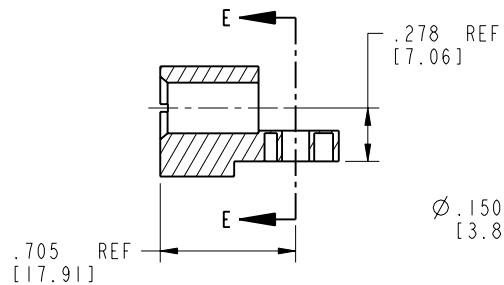


SECTION C-C




SECTION E-E

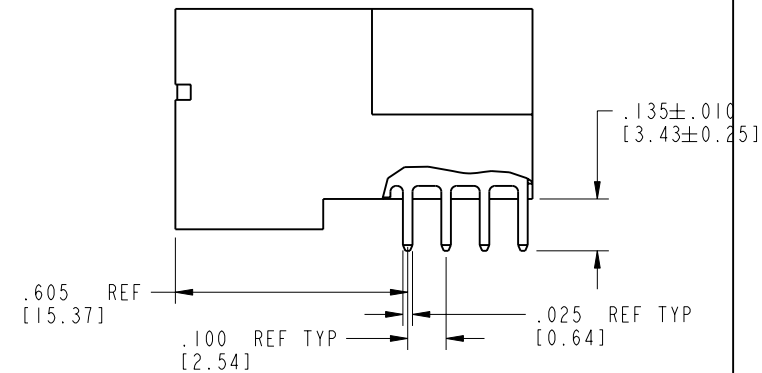

BROKEN-OUT SECTION B-B
SCALE 2:1

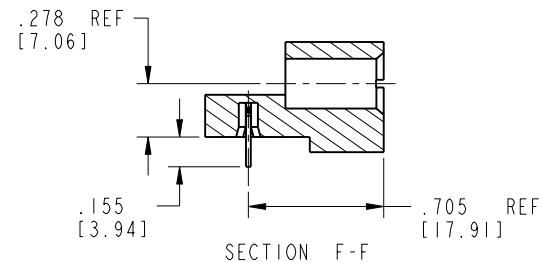

SECTION F-F

mat'l code				SEE NOTE 2		tolerances unless otherwise specified		CUSTOMER		A FCI www.fciconnect.com	
lfr	ecn no.	dr	date	linear	.XX±.01/0.X±0.3		COPY		projection 	title	
D	-	-	-		.XXX±.005/0.XX±0.13					4P + 16S	
					.XXXX±.0020/0.XXX±0.051					RIGHT ANGLE SOLDER HEADER	
				angles	0°±2°				INCH/MM  scale 1:1	product family	
				dr	M. MOSTOLLER	9/8/03	PwrBlade			code	
				enrg	M. MOSTOLLER	9/8/03	size			213	
				chr	H. BREWBAKER	9/8/03	dwg no			sheet	
				appd	M. MOSTOLLER	9/8/03			A 51732-016		2 of 4
sheet index		revision sheet									

cage code 22526


Pro/E

PDM: Rev:D

STATUS: Released

Printed: Oct 08, 2006

PRODUCT NUMBER
51732-016--
NOTE (3)

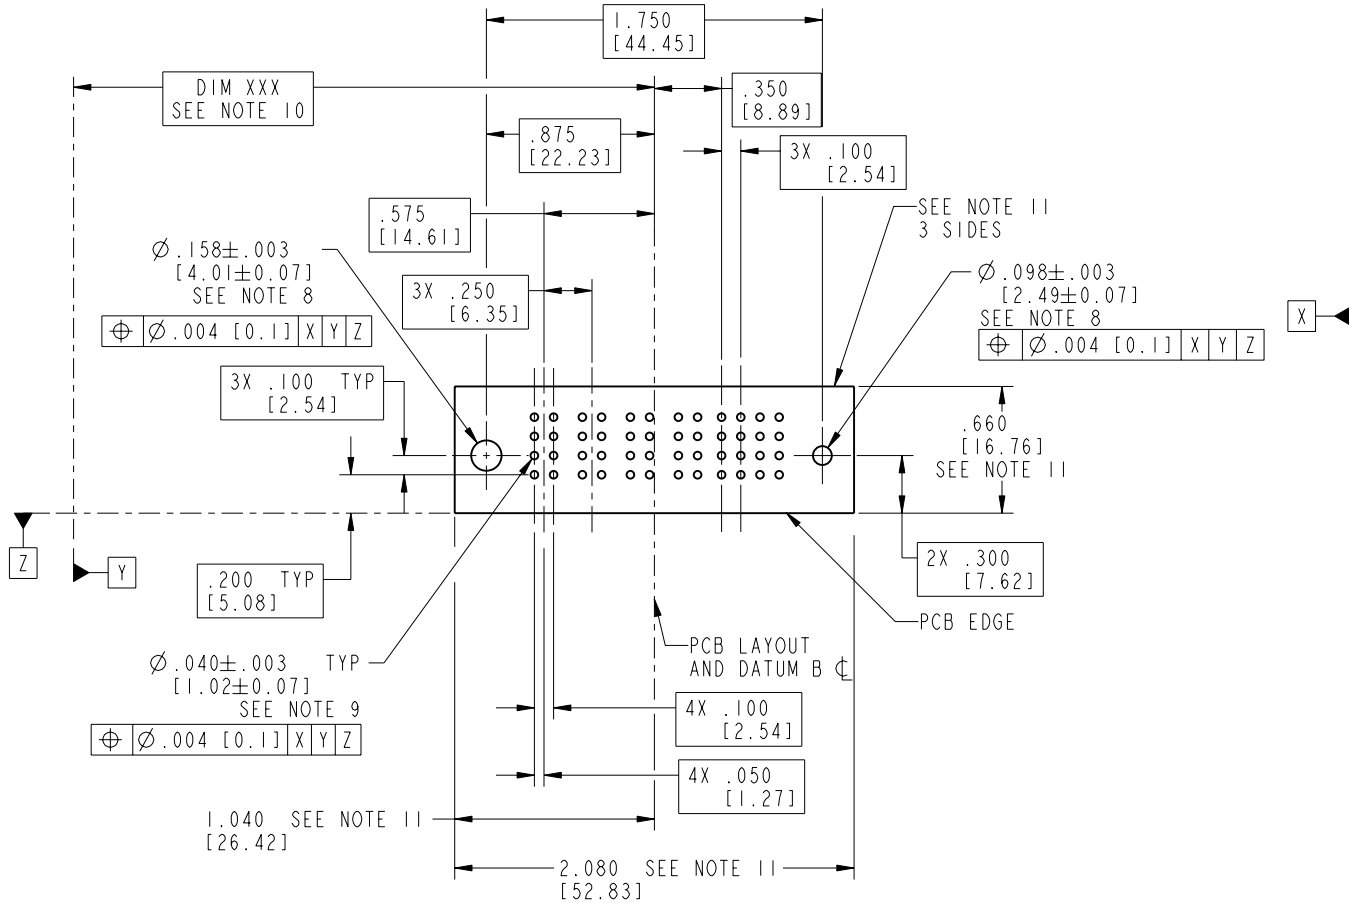

RECOMMENDED PCB LAYOUT

mat'l code				tolerances unless otherwise specified		CUSTOMER		A FCI www.fciconnect.com			
lfr	ecn no.	dr	date	linear	angular	COPY	projection	title	product family	code	sheet
D	-	-	-	.XX±.01/0.X±0.3	.XXX±.005/0.XXX±0.13			4P + 16S	PwrBlade	213	3 of 4
				.XXX±.0020/0.XXX±0.051	.XXX±.0020/0.XXX±0.051			RIGHT ANGLE SOLDER HEADER			
				dr	M. MOSTOLLER 9/8/03						
				enr	M. MOSTOLLER 9/8/03						
				chr	H. BREWBAKER 9/8/03						
				appd	M. MOSTOLLER 9/8/03						
sheet index	revision sheet										

Pro/E

3

cage code 22526

4

PRODUCT NUMBER
51732-016--
NOTE (3)

NOTES:

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M, 1994 UNLESS OTHERWISE SPECIFIED.

CONNECTOR NOTES:

- (2) HOUSING MATERIAL: UL 94 V-0 GLASS FILLED
HIGH-TEMP THERMOPLASTIC
POWER CONTACT MATERIAL: COPPER ALLOY
SIGNAL PIN MATERIAL: COPPER ALLOY

3. PLATING:

51732-016 Signal Pin: 30u"/0.76um Au OVER 50u"/1.27um Ni ON THE CONTACT AREA.
AND 100u"/2.54um SnPb PLATING OVER 50u"/1.27um Ni ON THE TERMINATION SECTION.
Power Pin: 30u"/0.76um Au OVER 50u"/1.27um Ni ON THE CONTACT AREA,
AND 100u"/2.54um SnPb PLATING OVER 50u"/1.27um Ni ON THE TERMINATION SECTION.

51732-016LF Signal Pin: 30u"/0.76um Au OVER 50u"/1.27um Ni ON THE CONTACT AREA.
AND 78u"/2.00um Sn PLATING OVER 50u"/1.27um Ni ON THE TERMINATION SECTION.
Power Pin: 30u"/0.76um Au OVER 50u"/1.27um Ni ON THE CONTACT AREA,
AND 78u"/2.00um Sn PLATING OVER 50u"/1.27um Ni ON THE TERMINATION SECTION.

PART NUMBER 51732-016LF MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A CIRCUIT BOARD.

- (4) MANUFACTURER'S NAME, P/N, AND DATE CODE TO APPEAR ON THIS SURFACE.

5. PRODUCT SPECIFICATION GS-12-149.
APPLICATION SPECIFICATION BUS-20-067.

6. PACKAGED IN TRAYS.

PCB NOTES:


7. ALL HOLE DIAMETERS ARE FINISHED HOLE SIZE.

- (8) MOUNTING HOLES, WHERE APPLICABLE, ARE UNPLATED.

- (9) $\varnothing .0453 \pm .0010$ [1.151 ± 0.025] DRILLED HOLES PLATED WITH
.0003 [0.008] MIN SnPb OVER .001 [0.03]
TO .003 [0.08] Cu PLATING TO ACHIEVE
 $\varnothing .040 \pm .003$ [$1.02 \pm .07$] HOLE.

- (10) "DIM XXX" TO BE DETERMINED BY THE CUSTOMER.

- (11) CONNECTOR KEEP-OUT ZONE.

mat'l code				SEE NOTE 2		tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com	
lfr	ecn no.	dr	date	linear	.XX±.01/0.X±0.3		COPY				
D	-	-	-		.XXX±.005/0.XX±0.13		projection				
					.XXX±.0020/0.XXX±0.051		INCH/MM				
				angles	0°±2°		scale		1:1		
				dr	M. MOSTOLLER	9/8/03	INCH/MM		product family		PwrBlade
				enrg	M. MOSTOLLER	9/8/03	scale		size		dwg no
				chr	H. BREWBAKER	9/8/03	scale		A		51732-016
				appd	M. MOSTOLLER	9/8/03	scale		A		51732-016
sheet index		revision sheet									

cage code 22526

Pro/E