

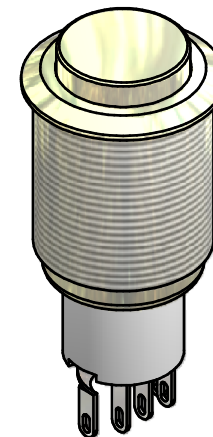


PANEL CUTOUT  
MAX. PANEL THICKNESS  
14.0mm [.551]

| SWITCH FUNCTION |        |
|-----------------|--------|
| POS. 1          | POS. 2 |
|                 |        |
| ON              | (ON)   |
| 1-3             | 1-2    |


(ON) = MOMENTARY



SPDT  
CONTACT CONFIGURATION

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: GOLD
5. RATING: 2A 48VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -20°C to 55°C
11. ▲ DENOTES CRITICAL PARAMETER.
12. HARDWARE SUPPLIED: O-RING AND HEXNUT
- ▲ 13. INGRESS RATING: IP40
14. 2002/95/EC (ROHS) COMPLIANT

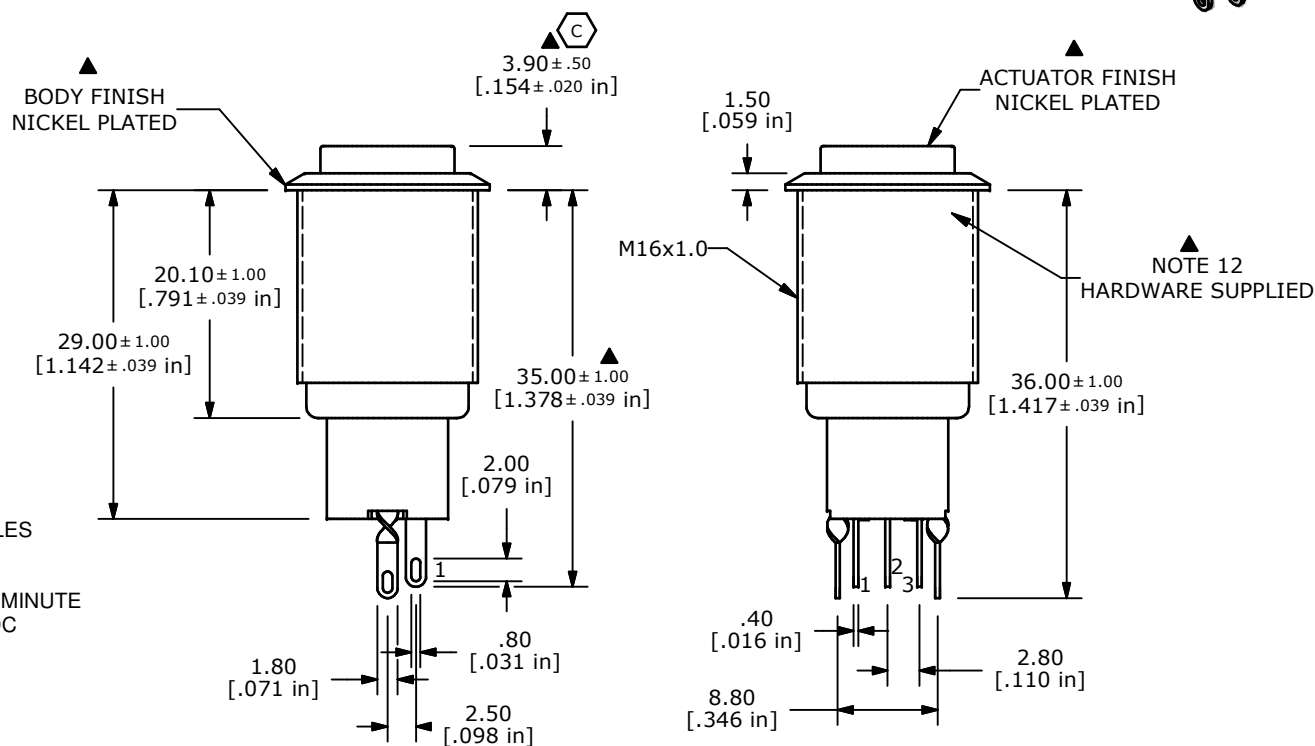

TITLE PV3H2B0NNG

|     |        |                        |         |     |
|-----|--------|------------------------|---------|-----|
| A   | 20766  | RELEASE FOR PRODUCTION | 9/25/12 | EBP |
| REV | PCR NO | DESCRIPTION            | DATE    | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|       |                   |           |                      |          |
|-------|-------------------|-----------|----------------------|----------|
| SCALE | DATE<br>9/25/2012 | DR<br>EBP | DWG<br>52-PV3H2B0NNG | REV<br>A |
|-------|-------------------|-----------|----------------------|----------|