



MAXIMUM PANEL THICKNESS: 0.315 [8.0mm]



SPECIFICATIONS

- FUNCTION:**
1P2T ON-(ON)
- RATING:**
2A 48VAC
- CONTACT RESISTANCE:**
Initial: 50mΩ Max. at 1A 12VDC
- INSULATION RESISTANCE:**
1,000MΩ Min. at 500VDC
- DIELECTRIC STRENGTH:**
2,000VAC Min. for 1 Minute
- ELECTRICAL LIFE:**
50,000 Cycles
- MECHANICAL LIFE:**
200,000 Cycles
- TEMPERATURE:**
Operating: -20°C to 55°C
- INGRESS PROTECTION:**
IP65
- APPROVALS:**







RoHS
COMPLIANT

MATERIALS

- BUSHING:**
Aluminum
- BASE:**
Polycarbonate (PC)
Polybutylene Terephthalate (PBT)
- ACTUATOR:**
Aluminum
Polycarbonate (PC)
- HARDWARE:**
Nickel Plated Brass (#59)
- SEALING:**
Silicone Rubber
- INNER ASSEMBLY:**
Polymer/Bronze (POM)
Phosphor Bronze
- SPRING:**
Spring Steel
- CONTACTS:**
Silver/Cadmium Oxide (AgCdO)
- TERMINALS:**
Silver Plated Brass (#62)
- O-RING:**
Silicone Rubber



COLORS AND FINISH

- BEZEL:**
Black
Anodized Finish
- ACTUATOR:**
Black
Anodized Finish
- LUMINATION:**
None
- MARKING:**
None



EXPLODED VIEW

ASSEMBLED VIEW

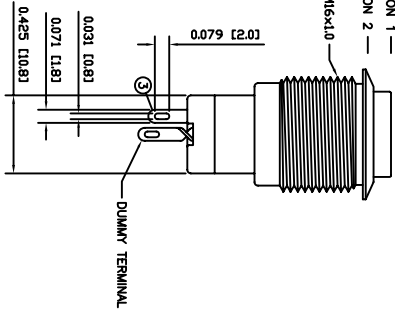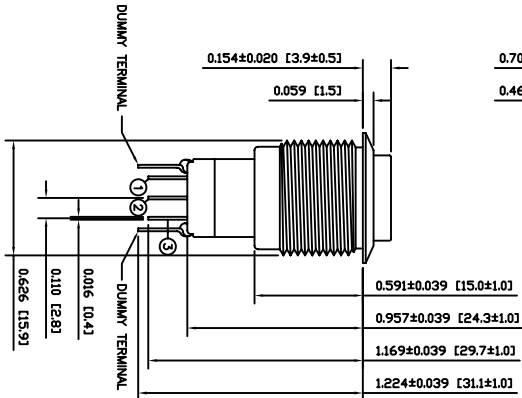

REV.	DATE	BY
A	10/03/24	CAB
B	09/13/12	CAB
C	09/10/16	CAB
D	09/09/28	CAB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

REV.

NEW RELEASE DESCRIPTION

PCB

DATE

DRAWN BY

SCALE

PROJECTION

TRD NUMBER

DATE

REVISION



E-SWITCH



PV3SWH2B011

AUG 13, 2012

A