






SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
1-3, 4-6	1-2, 4-5

- NOTE:
1. ALL DIMENSIONS IN mm [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. CONTACT MATERIAL: SILVER
 5. RATING: 2A 48VDC
 6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 7. INSULATION RESISTANCE: 1,000 MΩ MIN.
 8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
 9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
 10. OPERATING TEMP.: -20°C to 55°C
 11. TRAVEL: 2.8mm
 12. ▲DENOTES CRITICAL PARAMETER.
 13. LAMP VOLTAGE: 20mA 1.8V
 14. INGRESS PROTECTION: IP65
 15. HARDWARE SUPPLIED: O-RING AND HEXNUT
 16. ILLUMINATION COLOR: RED

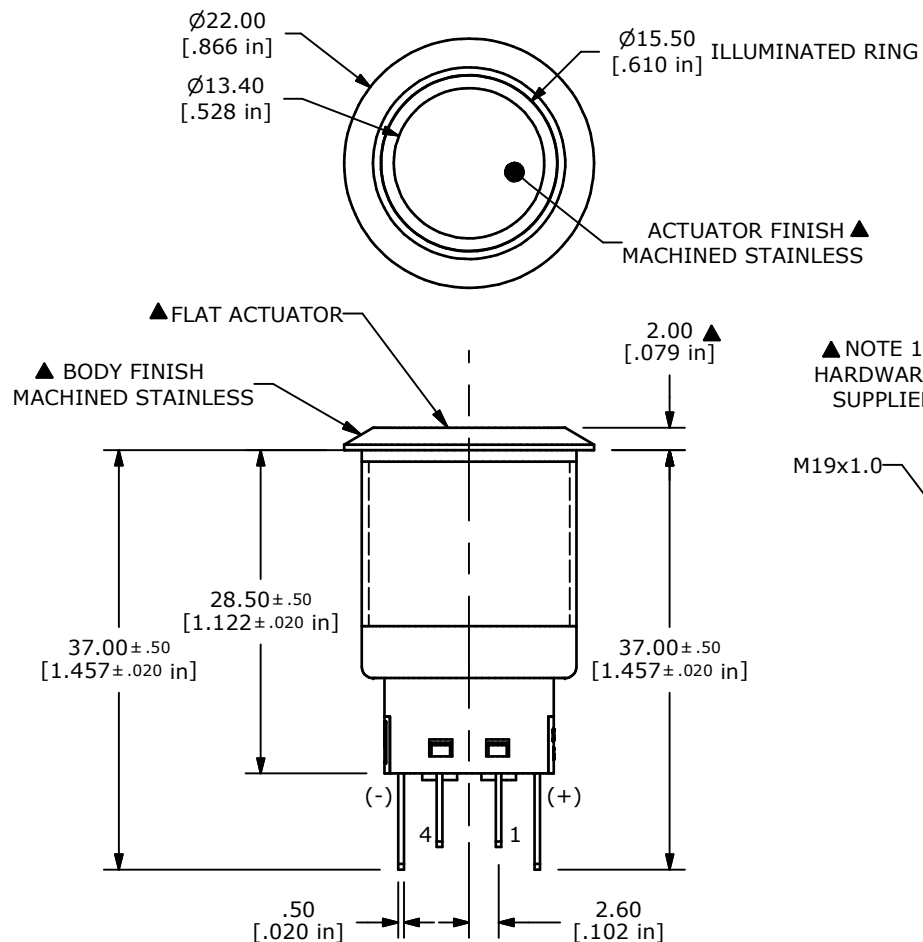

▲ NOTE 15
HARDWARE
SUPPLIED

M19x1.0

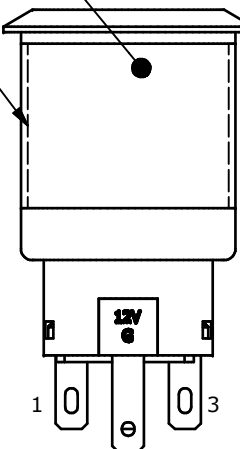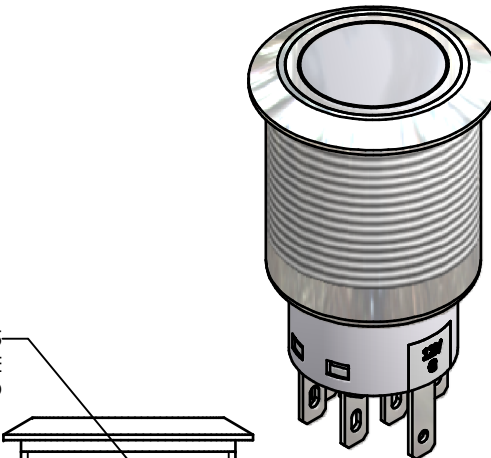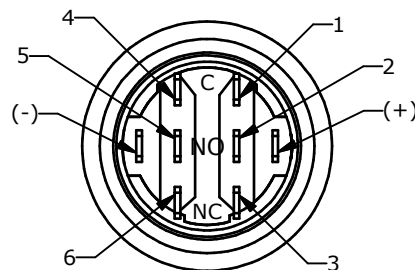

▲ DPDT
CONTACT CONFIGURATION



TITLE PV4F2G0SS-311

A	20642	INITIAL RELEASE	06/14/12	drg
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	NONE	DATE	6/14/2012	DR	BGL	DWG	52-PV4F2G0SS311	REV	A
-------	------	------	-----------	----	-----	-----	-----------------	-----	---