







PANEL MOUNTING
MAX. PANEL THICKNESS 4mm

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1-2

(ON) = MOMENTARY

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CIRCUIT: SPST, OFF- (ON)
5. CONTACT MATERIAL: SILVER
6. RATING: 2A @ 48 VDC
7. ELECTRICAL LIFE: 200,000 CYCLES
8. CONTACT RESISTANCE: 50 mΩ MAX. @ 1A 12VDC (INITIAL)
9. INSULATION RESISTANCE: 1,000 MΩ MIN. @ 500VDC.
10. DIELECTRIC STRENGTH: 2,000 VAC rms.
11. OPERATING TEMPERATURE: -20°C TO +70°C.
12. INGRESS PROTECTION: IP65
13. ▲ DENOTES CRITICAL PARAMETER.
14. 2002/95/EC (ROHS) COMPLIANT
15. ▲ HARDWARE INCLUDED, 1 O-RING & 1 HEX NUT.(NOT SHOWN)

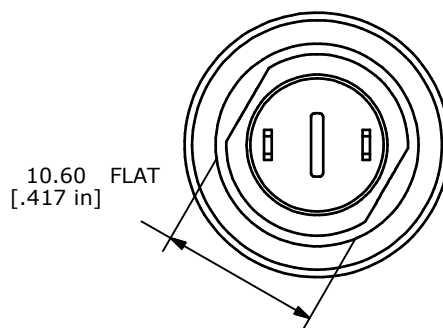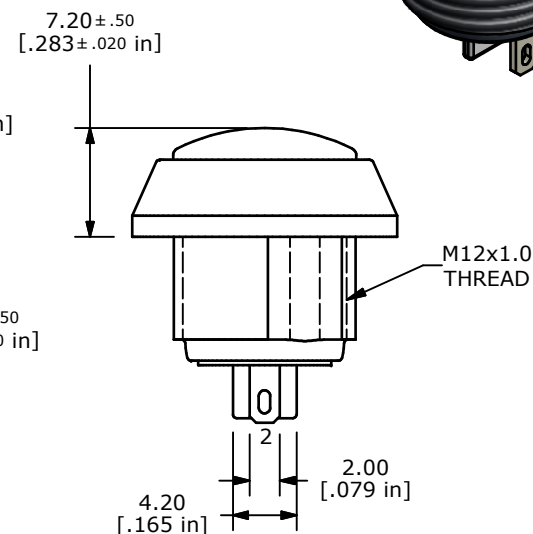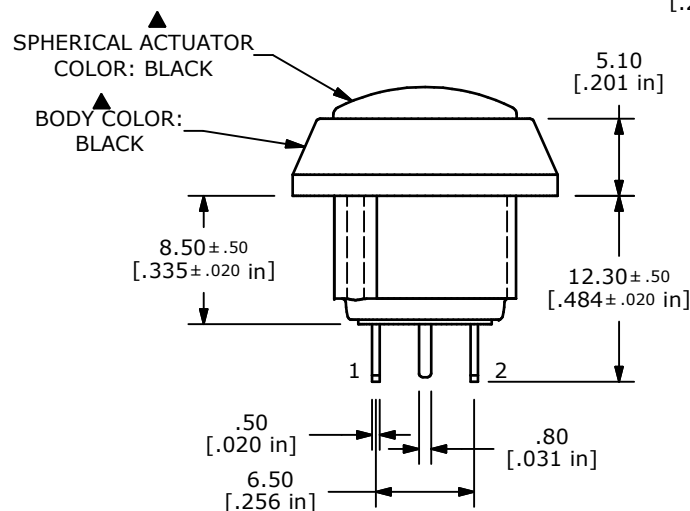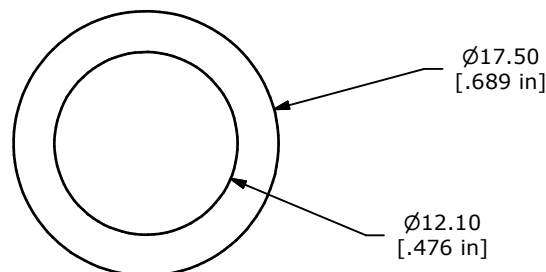

TITLE PV5S24011

A	20901	RELEASE FOR PRODUCTION	12/3/12	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE 12/3/2012	DR EBP	DWG 52-PV5S24011	REV A
-------	-------------------	-----------	---------------------	----------