

F

E

D

C

B

A

F



E

D

C

B

A

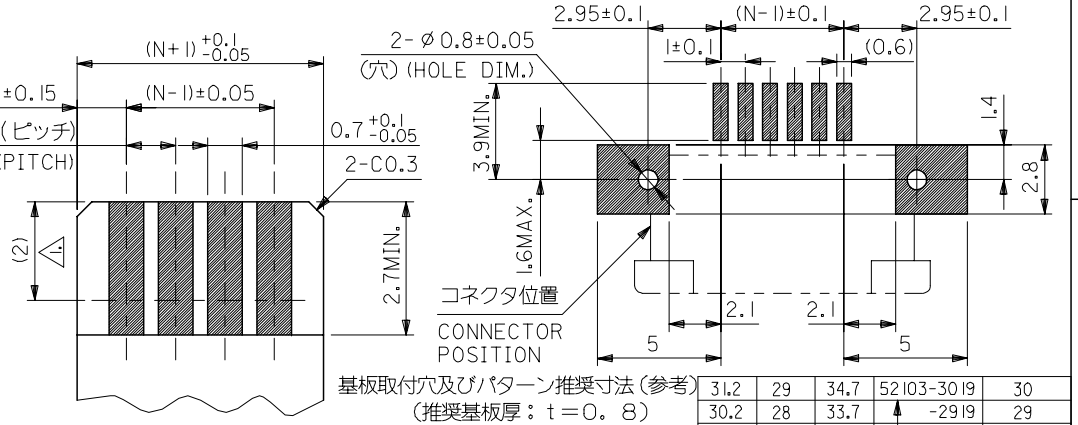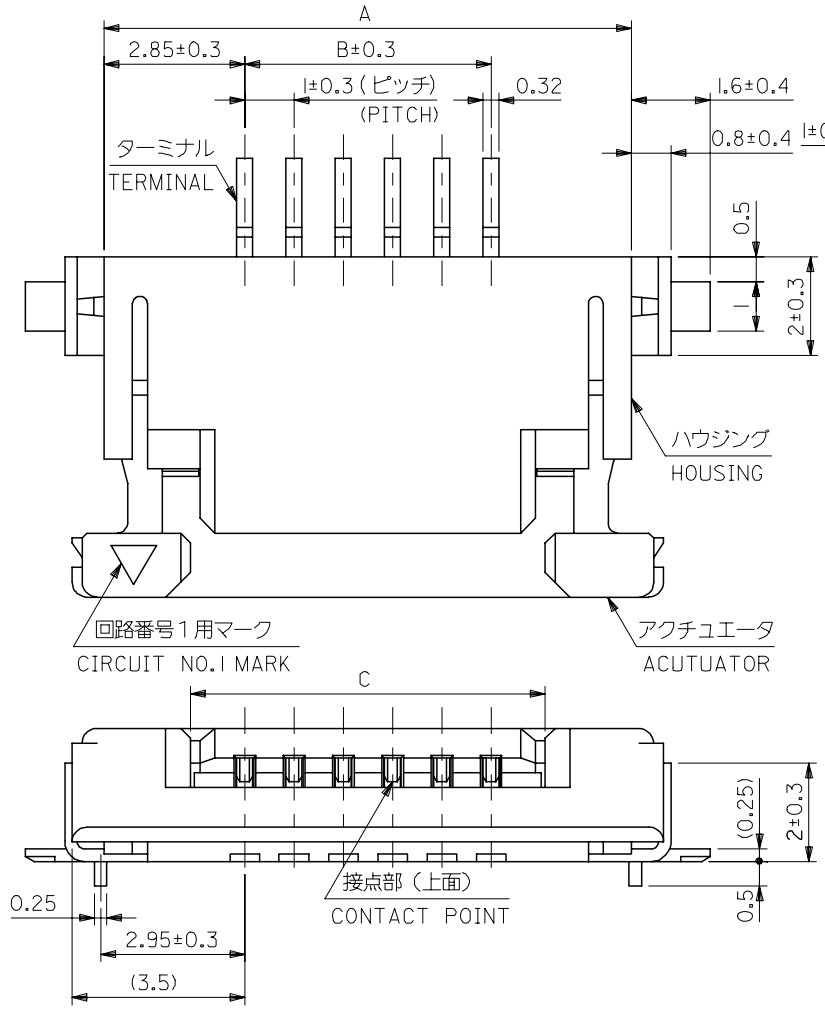

RECOMMENDED DIM. FOR P.C. BOARD MOUNTING HOLES AND PATTERN (RECOMMENDED THK OF P.C. BOARD t=0.8)

31.2	29	34.7	52103-3019	30
30.2	28	33.7	-2919	29
29.2	27	32.7	-2819	28
28.2	26	31.7	-2719	27
27.2	25	30.7	-2619	26
26.2	24	29.7	-2519	25
25.2	23	28.7	-2419	24
24.2	22	27.7	-2319	23
23.2	21	26.7	-2219	22
22.2	20	25.7	-2119	21
21.2	19	24.7	-2019	20
20.2	18	23.7	-1919	19
19.2	17	22.7	-1819	18
18.2	16	21.7	-1719	17
17.2	15	20.7	-1619	16
16.2	14	19.7	-1519	15
15.2	13	18.7	-1419	14
14.2	12	17.7	-1319	13
13.2	11	16.7	-1219	12
12.2	10	15.7	-1119	11
11.2	9	14.7	-1019	10
10.2	8	13.7	-0919	9
9.2	7	12.7	-0819	8
8.2	6	11.7	-0719	7
7.2	5	10.7	-0619	6
6.2	4	9.7	-0519	5
5.2	3	8.7	-0419	4
4.2	2	7.7	52103-0319	3
C	B	A	MATERIAL NO.	CIRCUIT
52103-***19				MODEL NO.

注記)
NOTES

- △ 接点部までの嵌合長さ。
LENGTH TO CONTACT POINT.
2. 使用材料
MATERIAL
ハウジング: 46NYLON, UL94V-0
HOUSING: 46NYLON, UL94V-0
アクチュエータ: PPS, UL94V-0
ACTUATOR: PPS, UL94V-0
ターミナル: リン青銅, ニッケル下地鍍ビスマメッキ (t=0.32)
TERMINAL: PHOS-BRO, TIN-BISMUTH OVER NICKEL PLATED (t=0.32)
金具: リン青銅, 鍍メッキ (t=0.25)
FITTING NAIL: PHOS-BRO, PRE-TIN PLATED (t=0.25)
- △ 位置決め及びパターンはくり止め用金具。
FITTING NAIL FOR POSITIONING AND BY WAY OF PREVENTION OF PEELING OFF PCB PATTERN.
4. 本製品は 52103-***17 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52103-***17.

REVISED EC NO: J2005-1179 DRAWN: MNABE1 CHKD: KTOJO APPR: NUKITA A	DESCRIPTION 2004/10/26 2004/10/26 2004/11/08	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY MNABE1	DATE '04/05/19	TITLE 1.0 FPC CONN. ZIF SMT				
		10 OVER 30 UNDER	±0.25	CHECKED BY KTOJO	DATE '04/05/19	-LEAD FREE-				
		30 OVER	±0.3	APPROVED BY MSASAO	DATE '04/05/19	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CAHRT		SD-52103-002		1 OF 1		
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						