

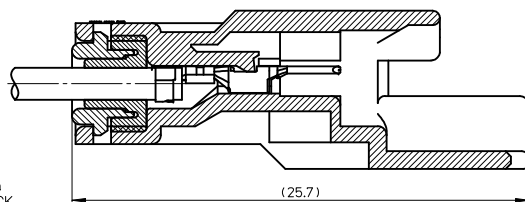


52116-024\*

52116-0240~0242 : RED  
52116-0243 : BLACK




断面A-A (端子装着状態)  
SECTION A-A (TERM. ASSEMBLY DRAWING)

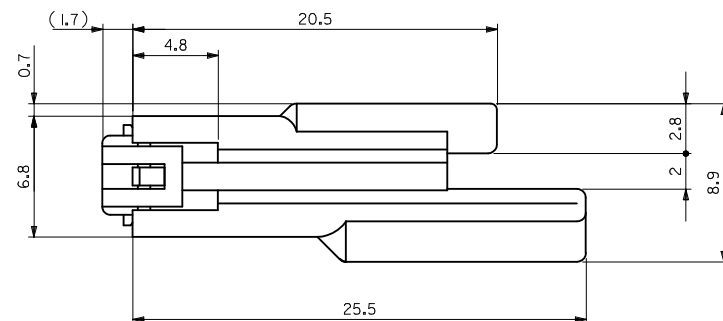


52116-034\*

YELLOW

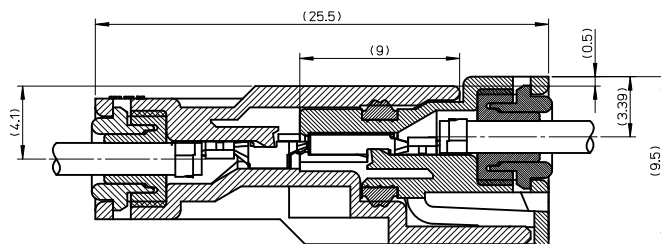

嵌合状態図  
FULLY MATED CONDITION

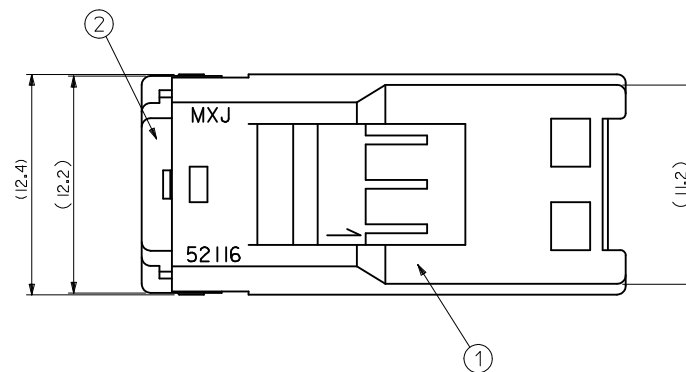

注記  
NOTE

- 適合端子: 50038-8\*00  
APPLICABLE TERMINAL: 50038-8\*00
  - 嵌合相手: 52117-0\*4\*  
MATE'S WITH: 52117-0\*4\*
  - 製品仕様書: PS-52117-007  
PRODUCT SPECIFICATION: PS-52117-007
  - 取扱説明書: AS-52117-001  
APPLICATION SPECIFICATION: AS-52117-001
5. ELV及RoHS適合品  
ELV AND RoHS COMPLIANT

材料 MATERIAL	色 COLOR	名称 TITLE	③
シリコンゴム SILICONE	参照 SEE DRAWING	ワイヤエンドシール WIRE END SEAL	③
ポリエステル POLYESTER (15%G.F.)	参照 SEE CHART	CAP	②
ポリエステル POLYESTER (15%G.F.)	参照 SEE CHART	プラグハウジング PLUG HOUSING	①

構成部品  
COMPONENTS

色 COLOR	材料 No. MATERIAL NO.	極数 CKT
赤 RED	52116-0342	3
黒 BLACK	52116-0341	3
白 WHITE	52116-0340	3
赤 RED	52116-0243	2
黒 BLACK	52116-0242	2
白 WHITE	52116-0241	2
赤 RED	52116-0240	2

REVISED & REDRAWN EC NO: JTR2012-0029 DRWN: S INAKA 2011/07/16 CHKD: SANDO 2011/12/14 APPR: MAYAMAMOTO 2012/01/18	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER	±0.2	DRAWN BY Y. ASHIZAWA	DATE 1988/7/8	TITLE 2.5 WATERPROOF CONN. PLUG HSG ASSY W/POSITIVE LOCK	
	10 OVER 30 UNDER	±0.25	CHECKED BY M. SAKANO	DATE 1988/7/8	MOLEX INCORPORATED	
	30 OVER	±0.3	APPROVED BY MAYAMAMOTO	DATE 2012/01/18	MATERIAL NO.	DOCUMENT NO. SD-52116-001
	ANGULAR ±3°		SEE CHART			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			