


Number of contacts

6–64

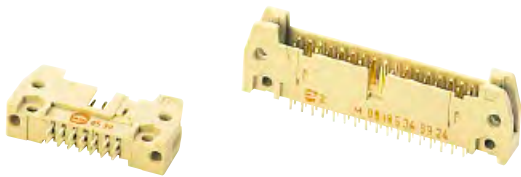

SMC male header with straight solder pins

Identification	No. of contacts	Part No.					
		Without levers		With short levers		With long levers	
SMC male header with straight solder pins Length: 2.9 mm	6	09 19 506	└ 924	09 19 506	└ 914	09 19 506	└ 904
	10	09 19 510	└ 924	09 19 510	└ 914	09 19 510	└ 904
	14	09 19 514	└ 924	09 19 514	└ 914	09 19 514	└ 904
	16	09 19 516	└ 924	09 19 516	└ 914	09 19 516	└ 904
	20	09 19 520	└ 924	09 19 520	└ 914	09 19 520	└ 904
	24	09 19 524	└ 924	09 19 524	└ 914	09 19 524	└ 904
	26	09 19 526	└ 924	09 19 526	└ 914	09 19 526	└ 904
	30	09 19 530	└ 924	09 19 530	└ 914	09 19 530	└ 904
	34	09 19 534	└ 924	09 19 534	└ 914	09 19 534	└ 904
	40	09 19 540	└ 924	09 19 540	└ 914	09 19 540	└ 904
	50	09 19 550	└ 924	09 19 550	└ 914	09 19 550	└ 904
	60	09 19 560	└ 924	09 19 560	└ 914	09 19 560	└ 904
	64	09 19 564	└ 924	09 19 564	└ 914	09 19 564	└ 904

* Not normally kept in stock
For accessories see page 08.52
For dimensions see page 08.45

For performance level 3 please specify digit
For performance level 2 please specify digit
S4 = 0.76 µm (30 µinch) Au or PdNi equivalent

