


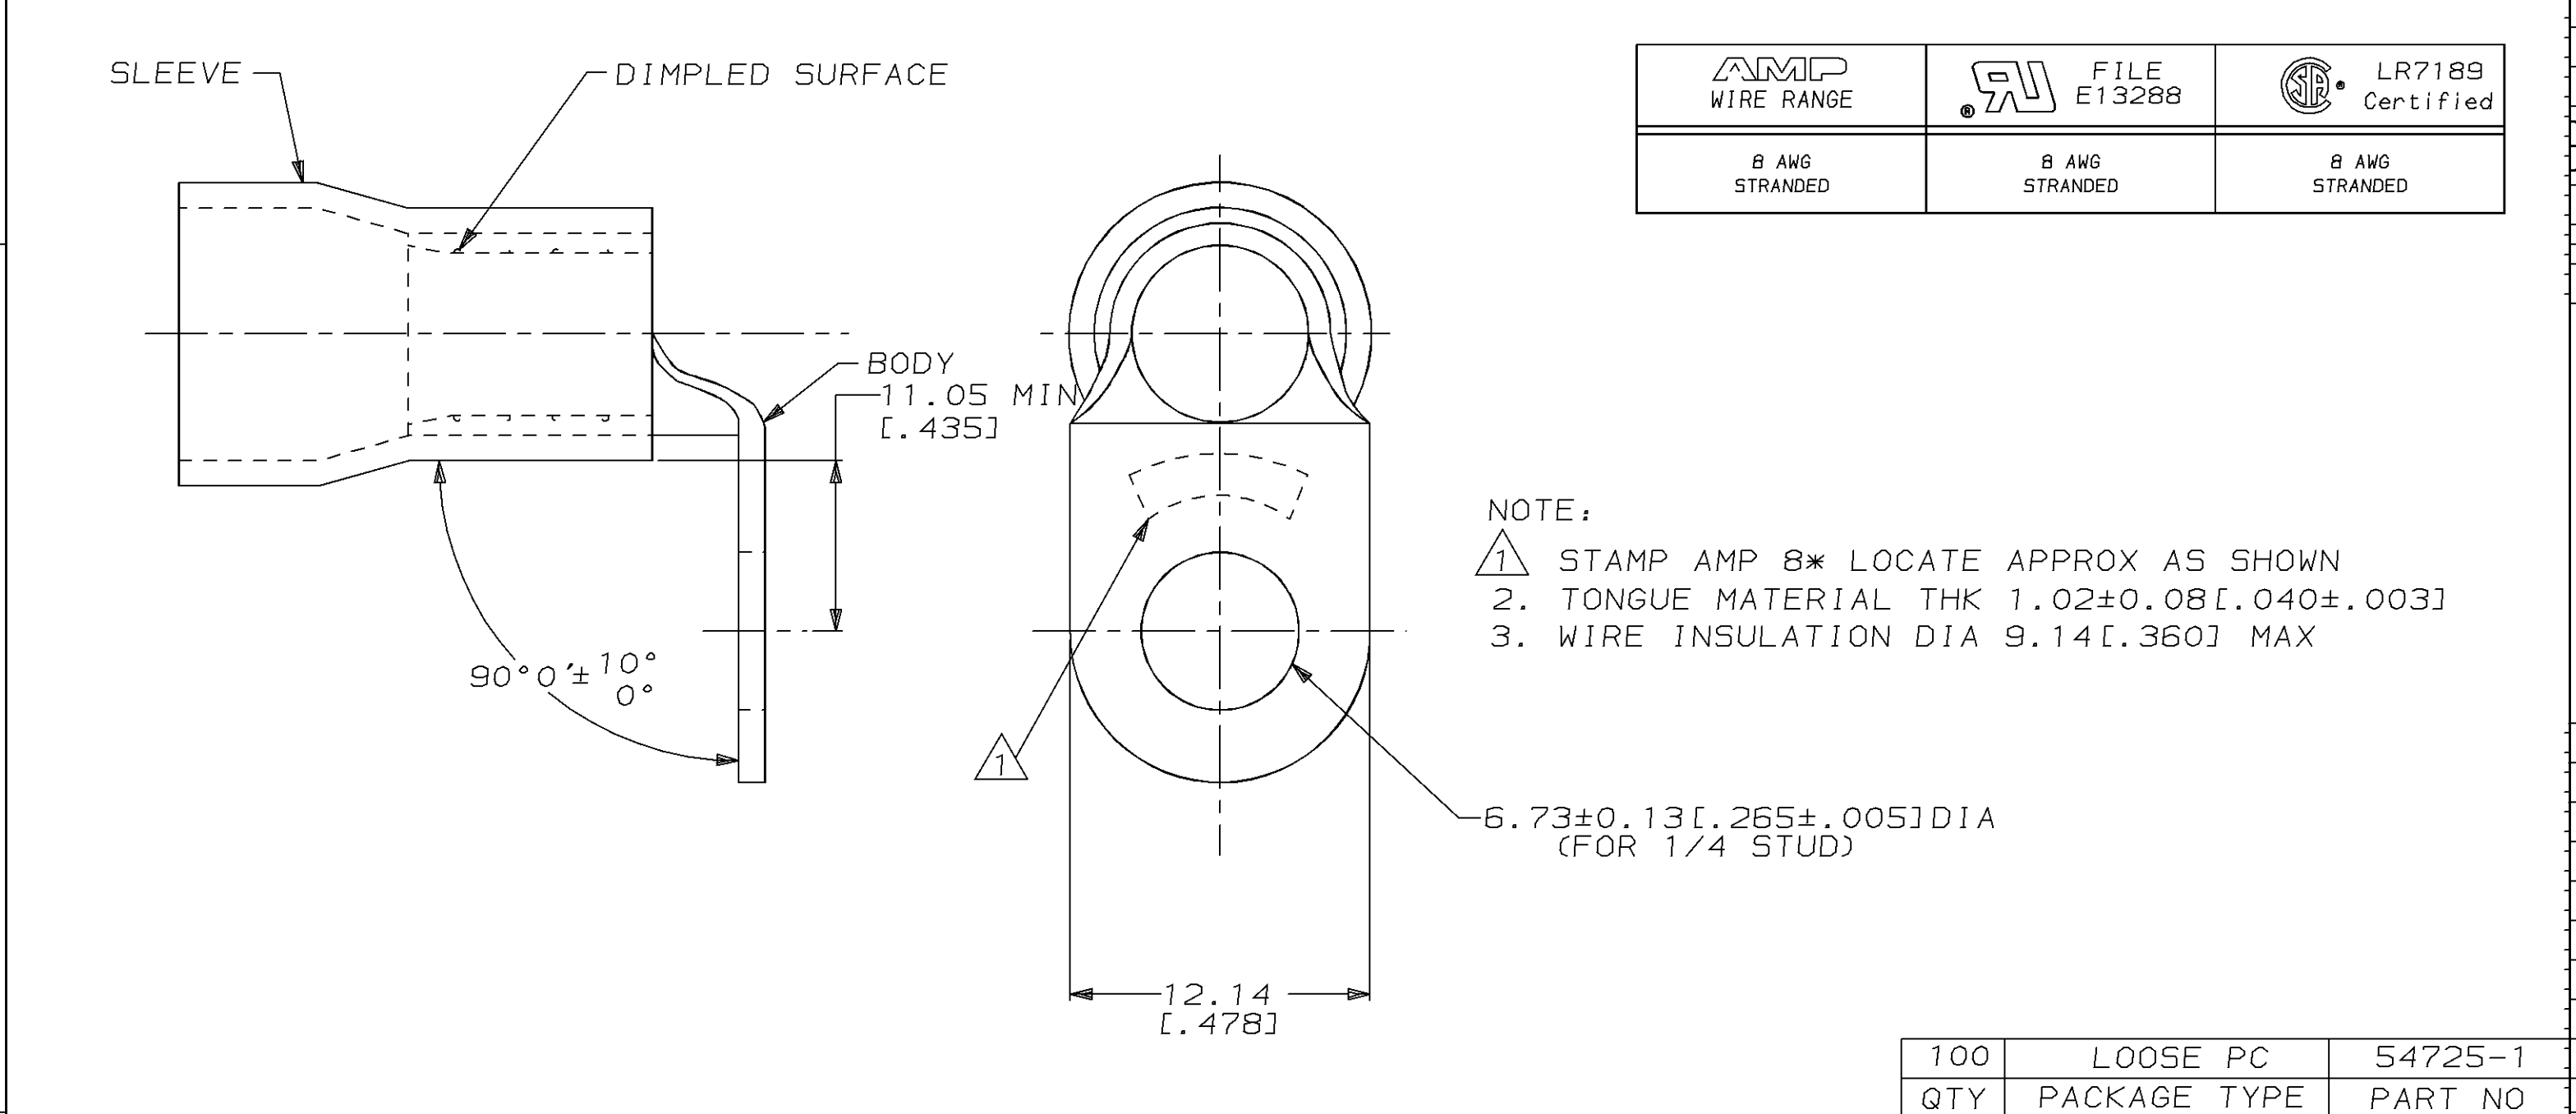

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 90°C		DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20 [.008] 3 PLC DEC ± - ANGLES ± -		DR 10-7-93 S.S. GOULDEN		AMP AMP Incorporated Harrisburg, PA 17105-3608						
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: 600 V MAX		CHK 10-7-93 R. HERSEY									
FOR APPLICATION TOOLING INFORMATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 6.64-10.54mm² [13,100-20,800]		MATERIAL COPPER PER ASTM B-152 PVC, COLOR, RED		APPD 10-7-93 B. BARE		NAME TERMINAL, RING TONGUE-BENT 90°, PLASTI-GRIP™, WIRE SIZE, 8 AWG					
FOR ORDER ENTRY		1-800-526-5142		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		FINISH TIN PLATE PER MIL-T-10727		APPD 10-7-93 M. ELLIS							
						PRODUCT SPEC NOT AVAILABLE		APPLICATION SPEC NOT AVAILABLE		SIZE		CAGE CODE		DRAWING NO	
										B		00779		C-54725	
										WEIGHT -		SCALE NTS		SHEET 1 OF 1	