

## CATALOG LISTING

# 5HM1

PAGE 1 OF 1

M

DRAWING  
NUMBER

**ANS**

## REPLACES

RELEASE NO. SR 12511

CHECK

**CHECK**

39, 1

Oct

217

HECK

66	2
----	---


OCT

140

33

## RASTER

FO-50378

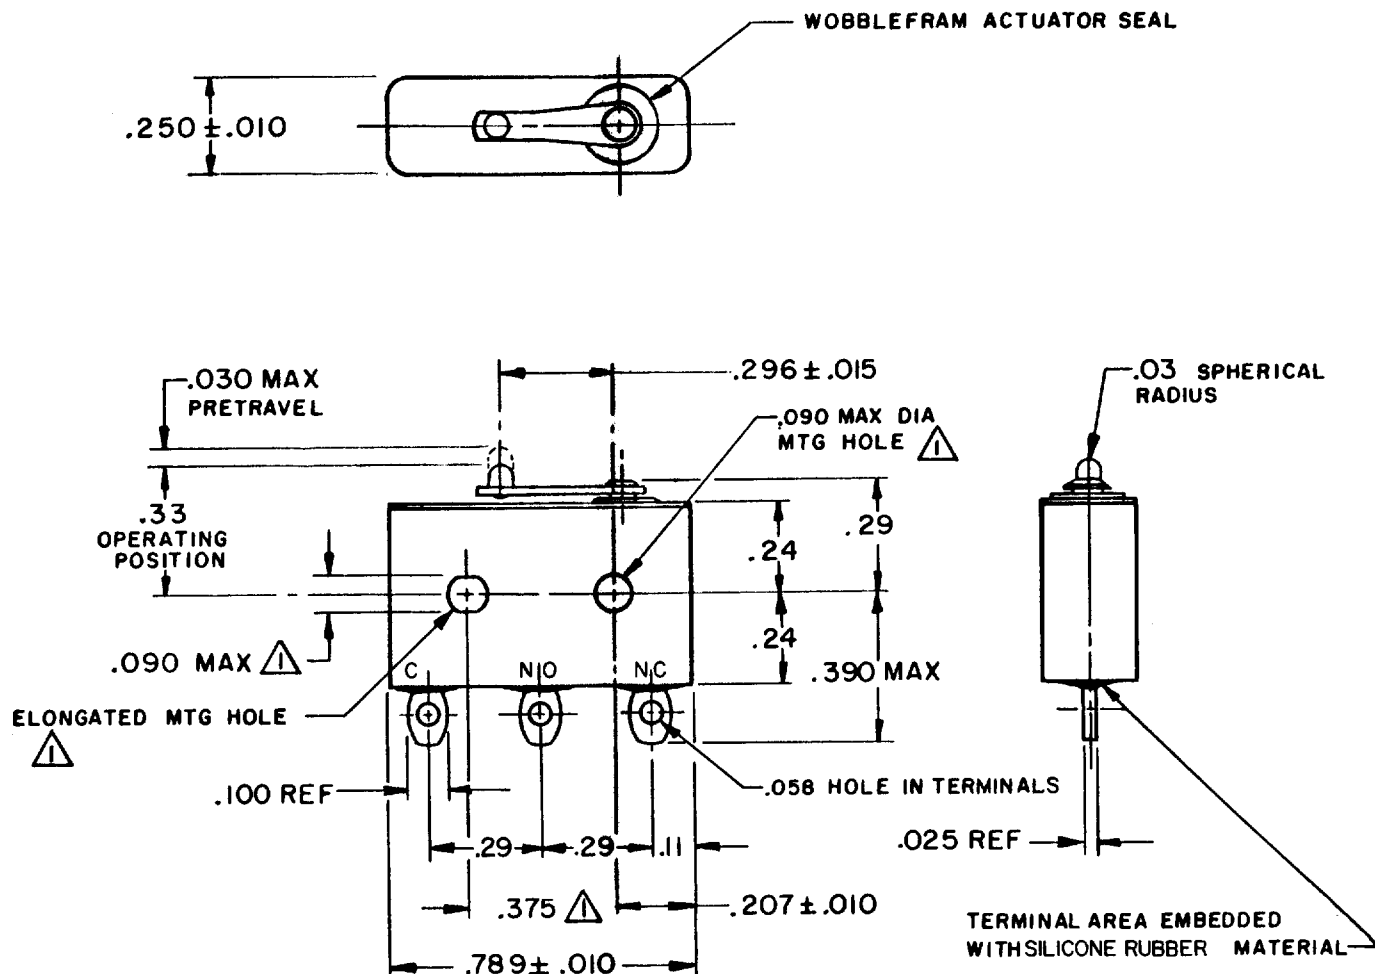

**NOTE -**

- ⚠ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
- 2 - FOR USE IN TEMPERATURE RANGE -300°F TO +500°F
  - 3 - HERMETICALLY SEALED (METAL-TO-METAL, GLASS-TO-METAL)
  - 4 - ALL EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIALS
  - 5 - TERMINALS ARE TINNED FOR SOLDERING
  - 6 - DO NOT APPLY MORE THAN 11/2 INCH-LBS OF TORQUE WHEN TIGHTENING MOUNTING SCREWS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA			SCALE 2 TO 1		
OPERATING FORCE - - - - - 7 OZ MAX		CONTACT ARRANGEMENT SPDT			DO NOT SCALE PRINT		
RELEASE FORCE - - - - - 1 OZ MIN		LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD	UNLESS OTHERWISE NOTED		
DIFFERENTIAL TRAVEL - - - - .006 MAX		28 VDC	2 AMP	4 AMP	DIMENSIONS ARE IN INCHES		
OVERTRAVEL - - - - - .003 MIN		115 VAC (400 CYCLE)	2 1/2 AMP	2 1/2 AMP	TOLERANCES ARE:		
					ONE PLACE	(.0)	±.030
					TWO PLACE	(.00)	±.015
					THREE PLACE	(.000)	±.005
					ANGLES		±
					WEIGHT .014 LB MAX		