
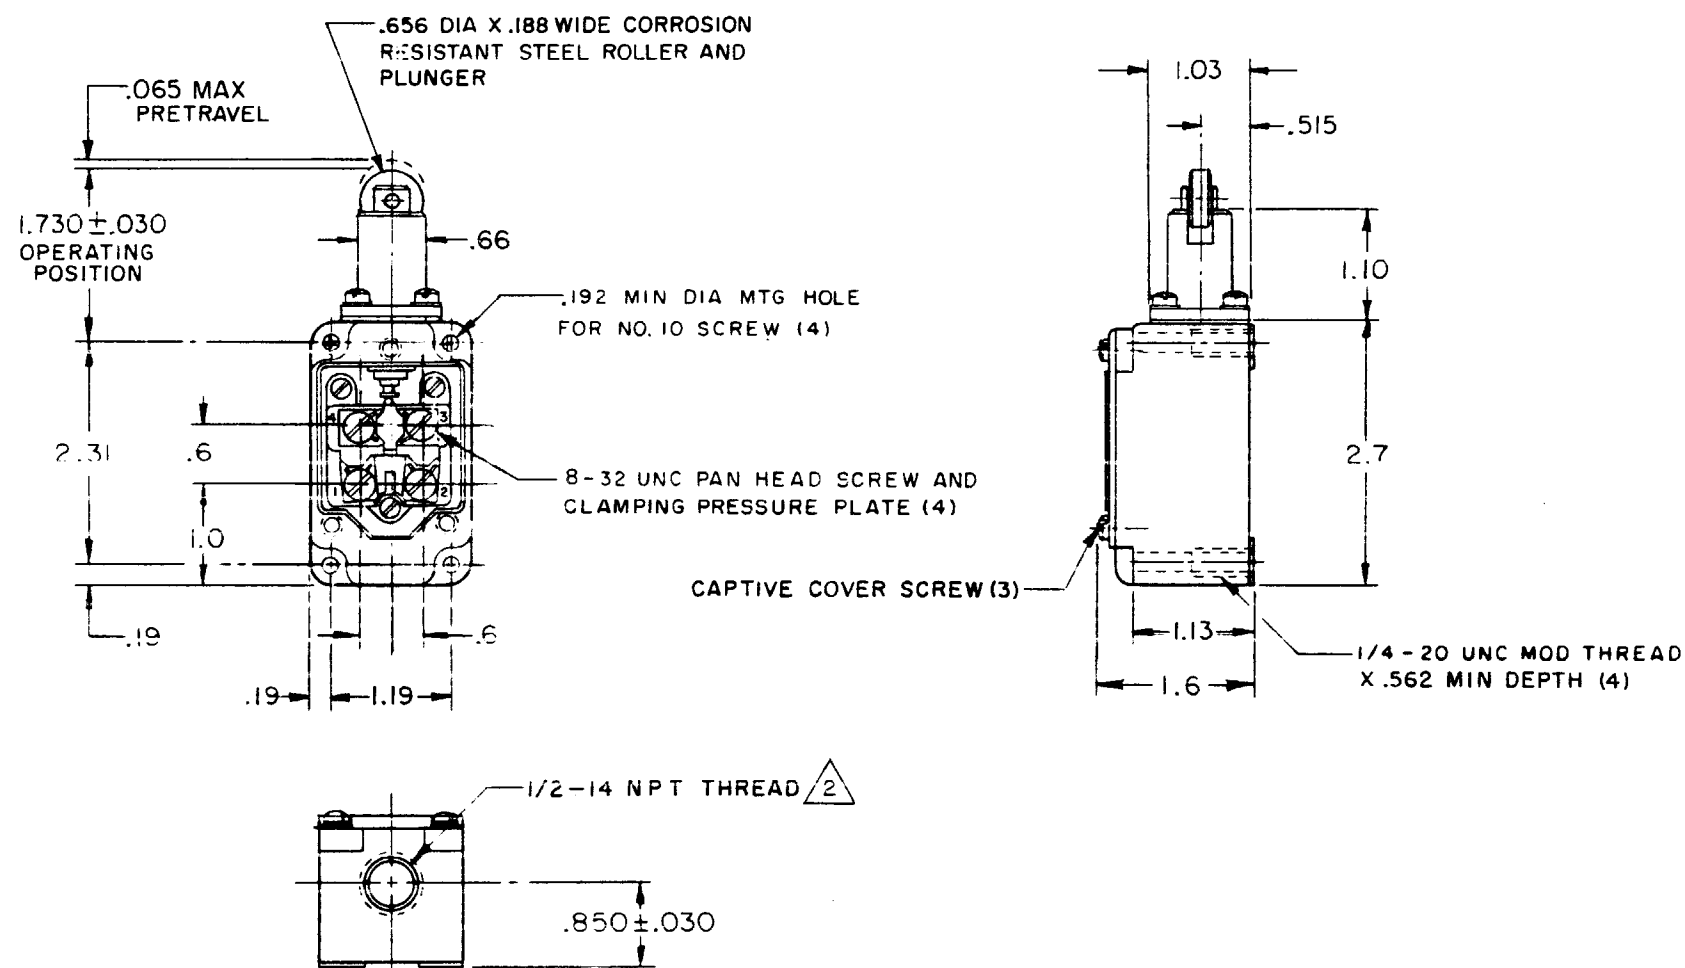
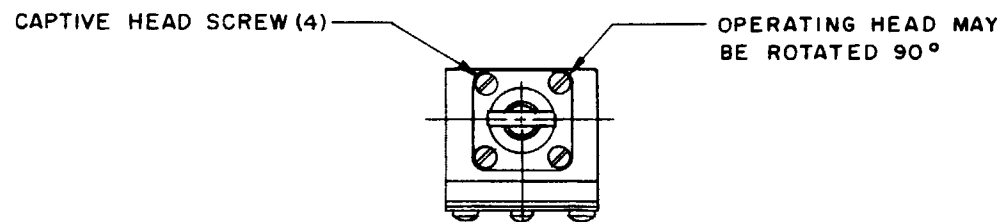


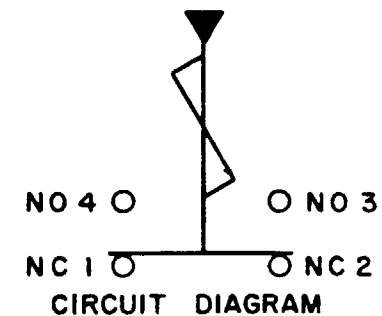

NOTE -

- 2 SEAL TO BE FURNISHED BY USER
3- ROLLER ASSEMBLY MAY BE RE-ASSEMBLED 90° FROM POSITION SHOWN

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING FORCE - - - - - 7 LB MAX	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 2 LB MIN	10A-120, 240, OR 480 VAC; 1/3 HP - 120 VAC 3/4 HP - 240 VAC; 0.8A - 115 VDC; 0.4A - 230 VDC .1A - 550 VDC PILOT DUTY: 600 VAC MAX	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
DIFFERENTIAL TRAVEL - - - - .020 MAX		ONE PLACE (.0) ±.030
OVERTRAVEL - - - - - .219 MIN		TWO PLACE (.00) ±.015
RELEASE TRAVEL - - - - - .015 MIN		THREE PLACE (.000) ±.003
SWITCH-BASIC REPLACEMENT - - - - 2 MNI		ANGLES ±
		WEIGHT

DRAWING NUMBER 5LS1

ISSUE

REVISIONS

A CO15200

RE R JUN 65

CO23403

M B S

24 SEP 68

CO24612

RE R OCT 68

CO25152

G C H

2 APR 69

CO50952

K A G

FEB 83

CO53005-D

C J H

AUG 84

CO65814-E

G R T

20 NOV 90

FO-50378-003

DRAWN

R E R 18 JUN 55 CHECK 150 22 JUN 55

REPLACES

RELEASE NO.

CHECK

CHECK