


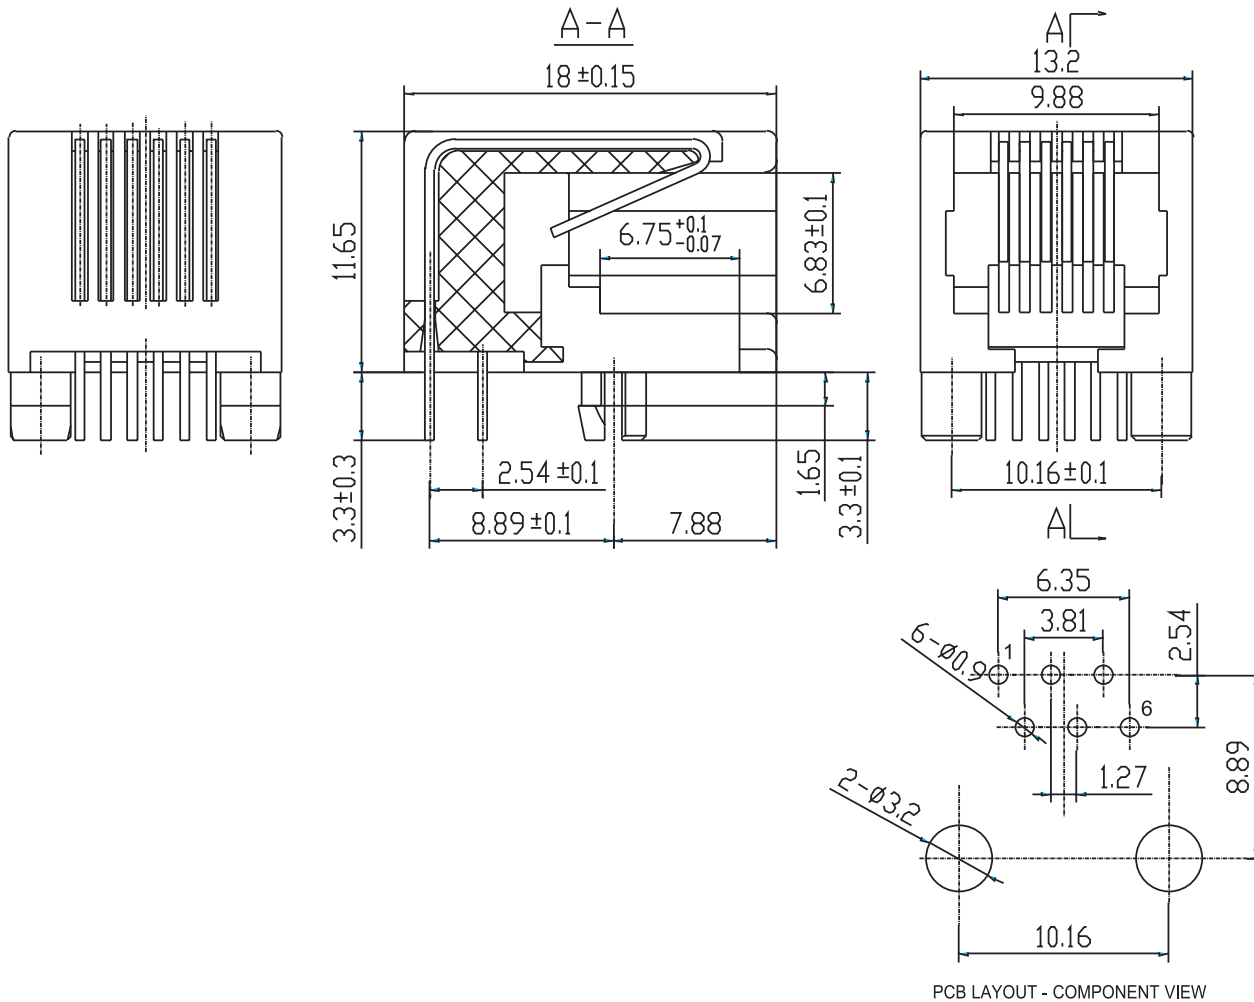

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR MATERIAL: PBT
FLAMMABILITY RATING UL94-V0
COLOUR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
SHIELDING: BRONZE NI PLATED
QUALITY CLASS: 500 MATING CYCLES


ENVIRONMENTAL
OPERATING TEMPERATURE: -40 °C UP TO 85 °C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1.5 A
WORKING VOLTAGE: 120 VAC
INSULATION RESISTANCE: >500 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN
CONTACT RESISTANCE: 20 MOHM MAX

STANDARD
CERTIFIED: E324776 / MODEL NUMBER 615-H1

SOLDERING
WAVE PROCESS ONLY

PACKAGING
TRAY

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		DESCRIPTION: HORIZONTAL PLASTIC 6P6C MODULAR JACK TAB DOWN	SIZE A4
G								
F								
E								
D								
C	27-SEP-13	TEMP UPDATE	QL	APPROVAL: RJ	UNIT: MM	WERI PART NO: 615 006 141 121		
B	07-OCT-09	UL STANDARD	JP		SCALE:			
A	01-OCT-08	PDF	CH		SHEET: 1/1			
REV	DATE	FILE	BY		DRAW:			