
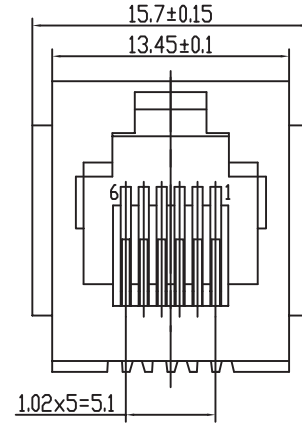
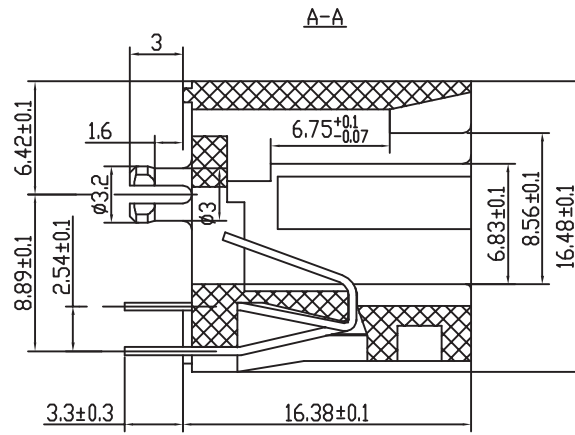


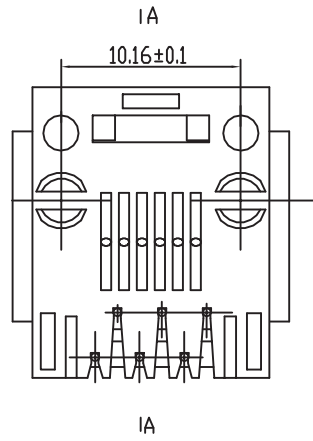

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR MATERIAL: PBT
FLAMMABILITY RATING UL94-V0
COLOUR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
QUALITY CLASS: 500 MATING CYCLES

ENVIRONMENTAL

OPERATING TEMPERATURE: -25 °C UP TO 85 °C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL



CURRENT RATING: 1.5 A
WORKING VOLTAGE: 120 VAC
INSULATION RESISTANCE: >500 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN
CONTACT RESISTANCE: 20 mOHM MAX

SOLDERING


WAVE PROCESS ONLY

PACKAGING

TRAY

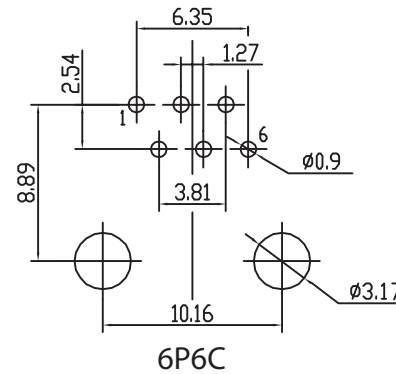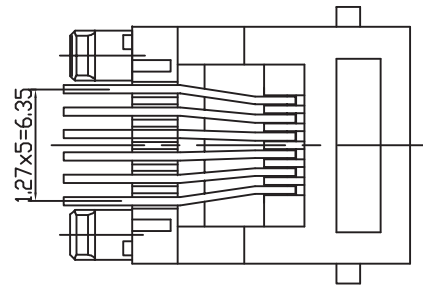

PCB LAYOUT - COMPONENT VIEW

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = ± 0.2 .XX = ± 0.15	 WÜRTH ELEKTRONIK	DESCRIPTION: VERTICAL PLASTIC 6P6C MODULAR JACK	SIZE A4
G								
F								
E								
D								
C	19-AUG-13	DIM CORRECTION	QL	APPROVAL: RJ	UNIT: MM	WERI PART NO: 615006144121		
B	02-JUN-09	NO SHIELD. MAT.	JP		SCALE:			
A	03-NOV-08	PDF	CH		SHEET: 1/1			
REV	DATE	FILE	BY		DRAW:			