

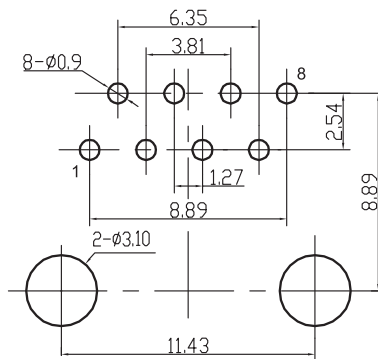


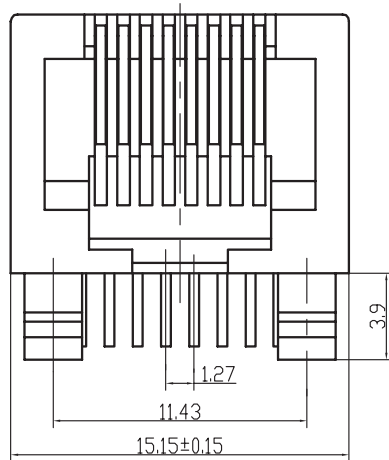

PCB LAYOUT - COMPONENT VIEW

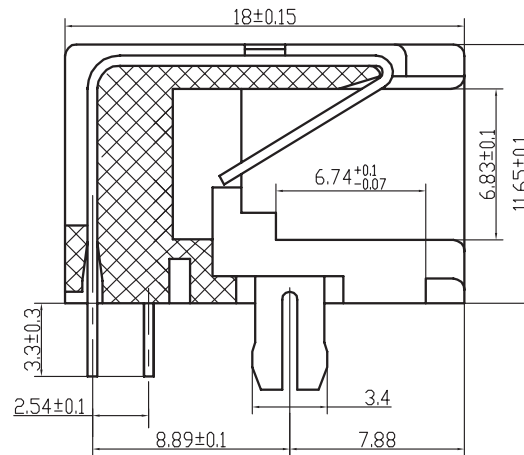

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR MATERIAL: GLASS FILED PBT
 COLOUR: BLACK
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: SELECTIVE GOLD
 QUALITY CLASS: 500 MATING CYCLES


ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 °C UP TO 85 °C
 FLAMMABILITY RATING UL94-V0
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 1.5 A
 WORKING VOLTAGE: 120 VAC
 INSULATION RESISTANCE: >500 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN
 CONTACT RESISTANCE: 20 mOHM MAX

STANDARD
 CERTIFIED: E324776 / MODEL NUMBER 615-HE1

SOLDERING
 WAVE PROCESS ONLY

PACKAGING
 TRAY

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15	 WÜRTH ELEKTRONIK	DESCRIPTION: HORIZONTAL PLASTIC 8P8C MODULAR JACK TAB DOWN	SIZE A4
G	F	E	D					
		26-SEP-13	TEMP UPDATE	QL				
		09-JUN-11	HOLE DIMENSION	GG				
		07-OCT-09	UL STANDARD	JP	APPROVAL: RJ	UNIT: MM		
		15-FEB-08	MOHM/mOHM UNITS	CH		SCALE:		
		20-NOV-07	PDF	CH		SHEET: 1/1	WERI PART NO: 615 008 137 121	
REV	DATE	FILE	BY		DRAW:			