

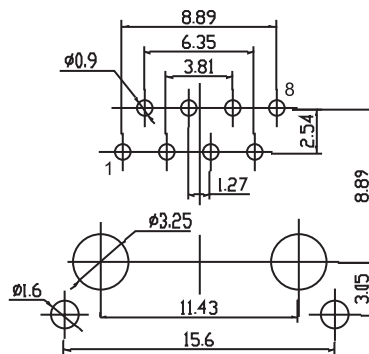
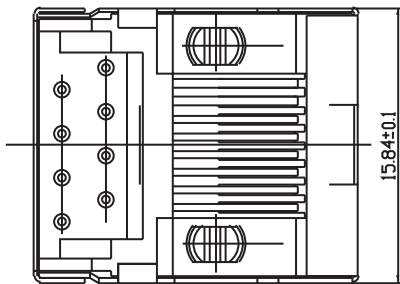


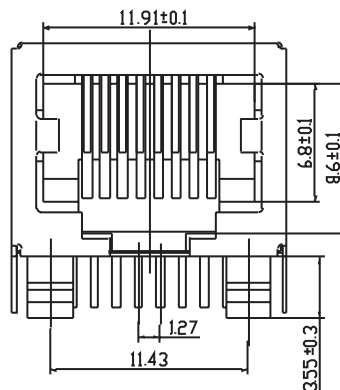

PCB LAYOUT - COMPONENT VIEW

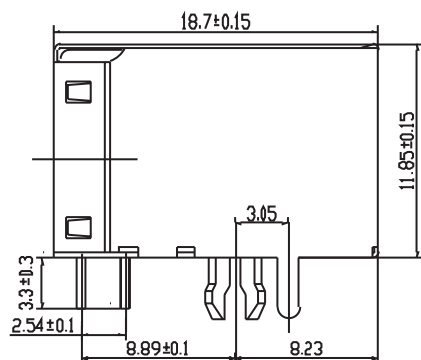

TECHNICAL CHARACTERISTICS

INSULATOR: GLASS FILED POLYESTER
FLAMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: PHOSPHOR BRONZE
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: BRONZE NI PLATED
QUALITY CLASS: 500 MATING CYCLES


ENVIRONMENTAL
OPERATING TEMPERATURE: -25 TO 85°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1.5A
VOLTAGE RATING: 120V DC
INSULATOR RESISTANCE: >1000 MOHM
WITHSTANDING VOLTAGE: 1000V AC/MIN
CONTACT RESISTANCE: 20 mOHM MAX
SYSTEM APPLICATION: CAT 5

STANDARD
UL CERTIFIED: E324776 / MODEL NUMBER 615-H1

SOLDERING: WAVE PROCESS ONLY

PACKAGING
TRAY

RoHS Compliant								
G				PROJECTION: 	TOLERANCES UNLESS OTHERWISE SPECIFIED 0~10 ± 0.1 10~20 ± 0.15 20~30 ± 0.2	 WÜRTH ELEKTRONIK		
F								
E								
D	20-AUG-13	DIM UPDATE	QL					
C	05-JUL-12	DIM	GG	APPROVAL: RJ	UNIT: MM	DESCRIPTION: SHIELDED 3.05mm FRONT GROUNDING POST 8P8C MODULAR JACK TAB DOWN		SIZE A4
B	06-OCT-09	UL STANDARD	JP		SCALE:			
A	06-NOV-07	PDF	EC		SHEET: 1/1	WERI PART NO: 615008140121		
REV	DATE	FILE	BY		DRAW:			