


1	2	3	4	5
---	---	---	---	---

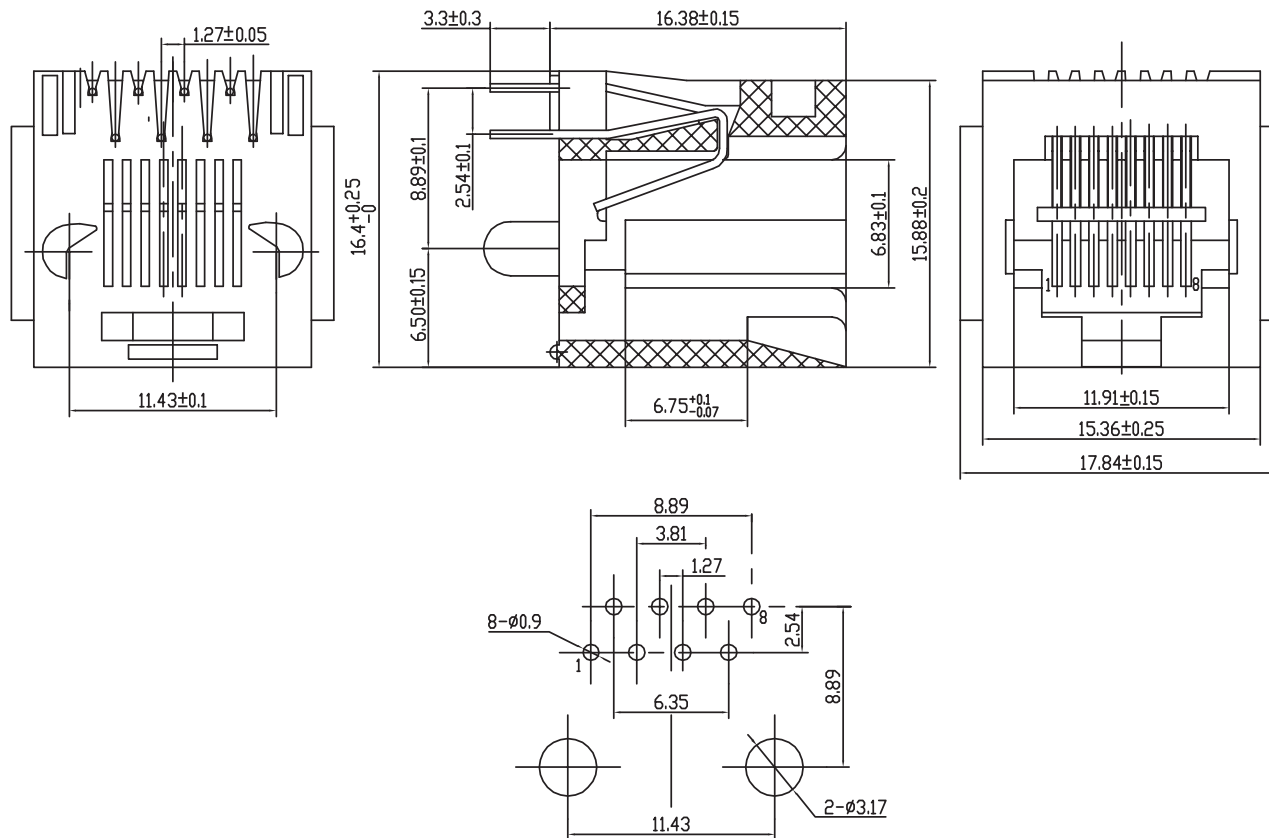

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR MATERIAL: PBT
FLAMMABILITY RATING UL94-V0
COLOUR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
QUALITY CLASS: 500 MATING CYCLES

ENVIRONMENTAL
OPERATING TEMPERATURE: -25 °C UP TO 85 °C
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
CURRENT RATING: 1.5 A
WORKING VOLTAGE: 120 VAC
INSULATION RESISTANCE: >500 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN
CONTACT RESISTANCE: 20 mOHM MAX

STANDARD
 CERTIFIED: E324776 / MODEL NUMBER 615-V1

SOLDERING
WAVE PROCESS ONLY

PACKAGING
TRAY

PCB LAYOUT - COMPONENT VIEW

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK		
G								
F								
E								
D								
C	21-JAN-13	PAD SHAPE + DIM	QL	APPROVAL: RJ	UNIT: MM	DESCRIPTION: VERTICAL PLASTIC 8P8C MODULAR JACK WITH EARS	SIZE	
B	07-OCT-09	NO SHIELD & UL STD	JP		SCALE:			
A	06-NOV-08	PDF	CH		SHEET: 1/1			
REV	DATE	FILE	BY		DRAW:	WERI PART NO: 615 008 144 221		
						A4		