
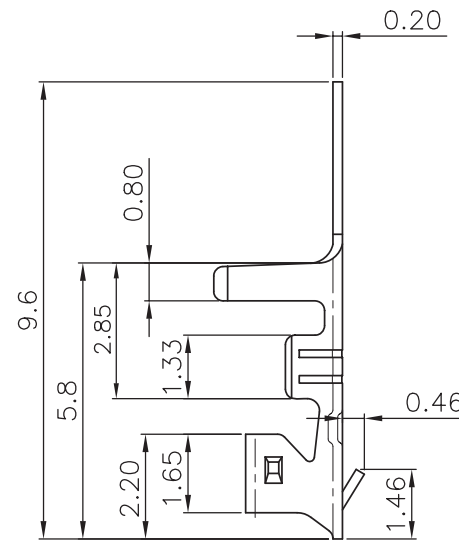


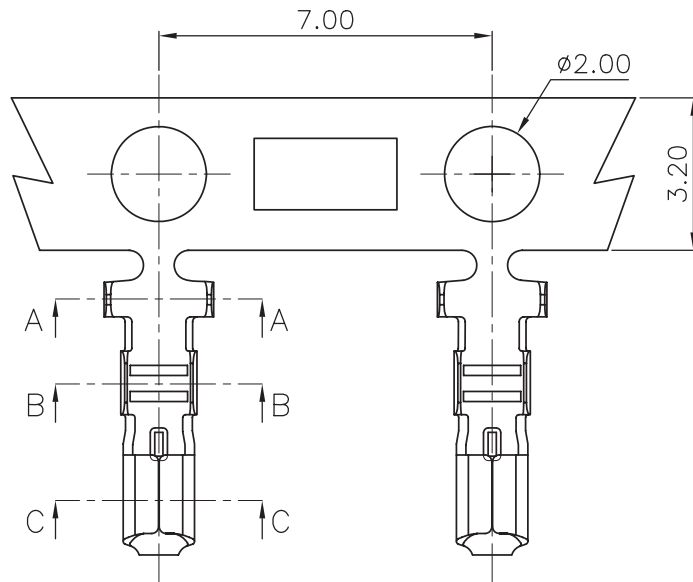

TECHNICAL CHARACTERISTICS


MATERIAL
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: TIN
 QUALITY CLASS: 25 MATING CYCLES
 PITCH: 2.00MM

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
 CURRENT RATING: 2A
 WORKING VOLTAGE: 125V AC
 CONTACT RESISTANCE: 20 mOHM MAX

WIRE DIMENSION
 AWG: AWG 24 - 28


PACKAGING
 10KPCS REEL




Section:A-A





Section:B-B



Section:C-C

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15	 WÜRTH ELEKTRONIK	
G							
F	06-AUG-13	CHARACTERISTIC	QL				
E	11-MAY-10	PACKAGING	JP				
D	19-FEB-09	DRAW	JP				
C	09-AUG-08	T&R DESCRIPTION	RB	APPROVAL: RJ	UNIT: MM	DESCRIPTION: 2.00 MM FEMALE CRIMP TERMINAL	SIZE
B	31-JAN-07	DRAW	EC		SCALE:		A4
A	28-FEB-06	PDF	JP		SHEET: 1/2	WERI PART NO: 62000113722	
REV	DATE	FILE	BY		DRAW: MIKE		

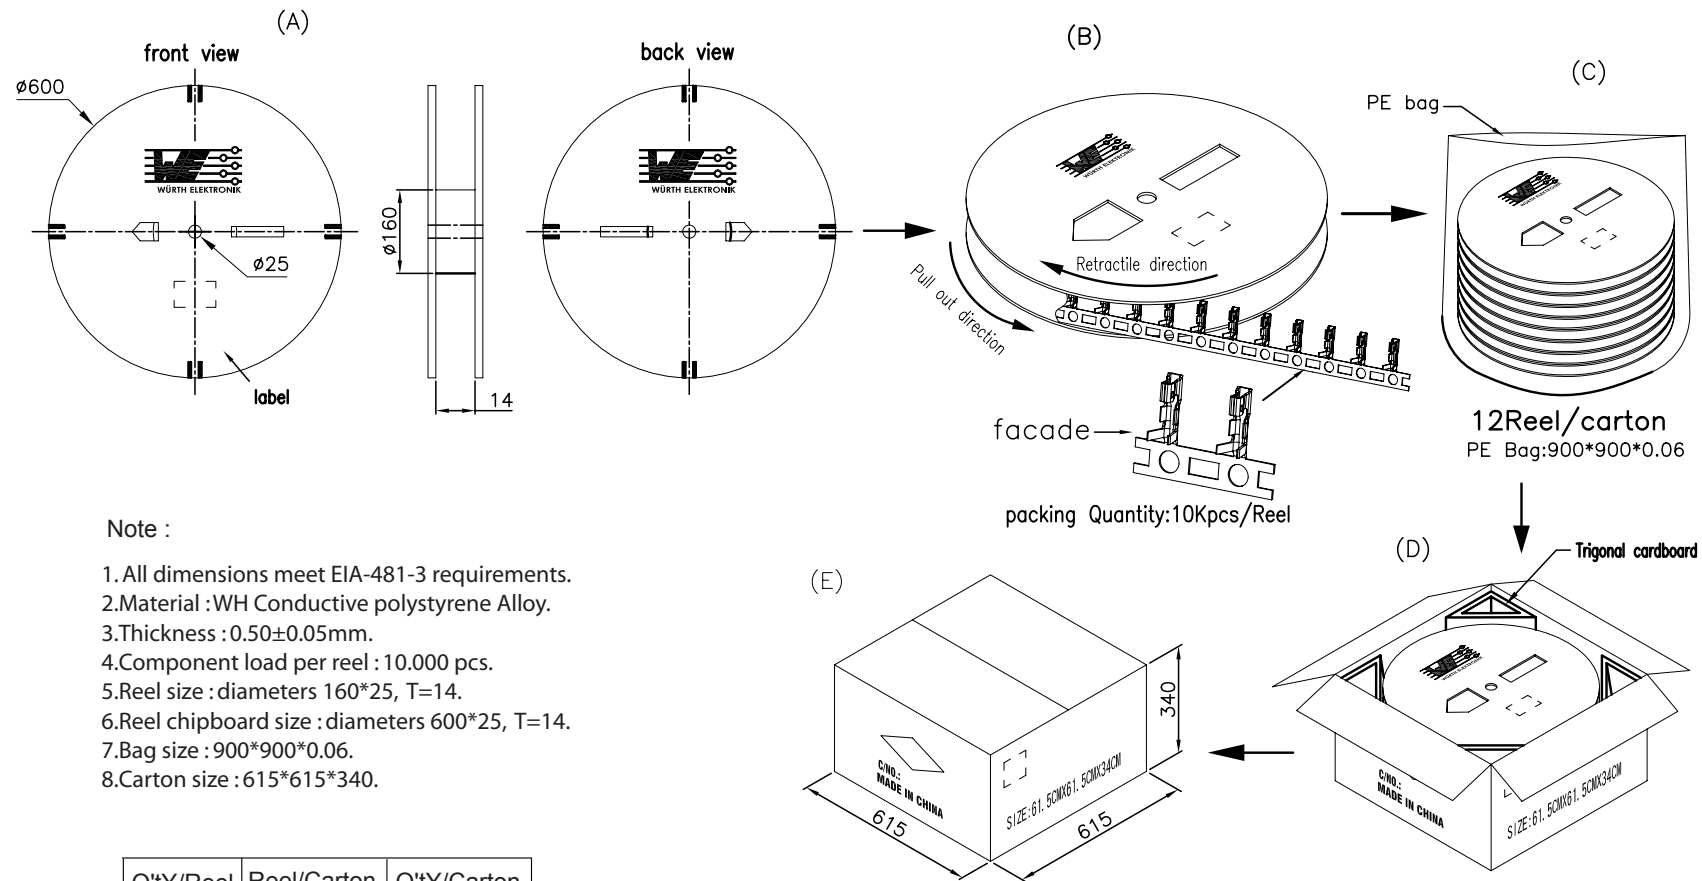

RoHS Compliant								
G				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK		
F								
E								
D								
C				APPROVAL:	UNIT: MM	DESCRIPTION: 2.00MM FEMALE CRIMP TERMINAL		SIZE
B					SCALE:			A4
A					SHEET: 2/2	WERI PART NO: 6200 01 13722		
REV	DATE	FILE	BY		DRAW: MIKE			