

CATALOG LISTING  
631NT91 SERIES CHART 1  
PAGE 1 OF 1

REVISIONS  
A 207702  
S A V  
19 MAR 03  
B 0004353  
AS  
22 MAR 04  
C 0016620  
TSG  
20 OCT 05  
PTC/CAD 2D  
DRAWN  
TSM 5 FEB 03  
CHECK SAV 5 FEB 03  
CHECK






MICRO SWITCH  
a Honeywell Division  
FED. MFG. CODE 91929







SWITCH - TOGGLE

631NT91 SERIES CHART 1

CATALOG LISTING


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN 			ELECTRICAL DATA
	KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	
631NT91-2	OFF	NONE	ON	L191 15A 125, <u>250</u> , 277 VAC 1/2HP 125 VAC 1HP <u>250</u> , 277 VAC 5A 125 VAC "L"  
631NT91-3	ON	NONE	ON	
631NT91-6	MOM ON	NONE	OFF	L192 10A 125, <u>250</u> , 277 VAC 1/4HP 125 VAC, 1/2HP <u>250</u> , 277 VAC 3A 125 VAC "L"  
631NT91-7	MOM ON	OFF	MOM ON	

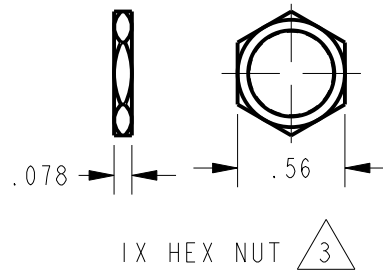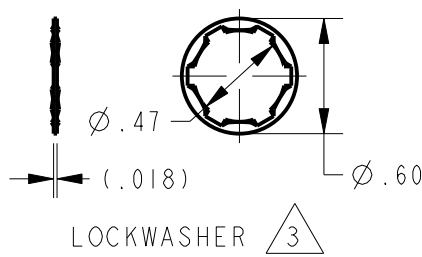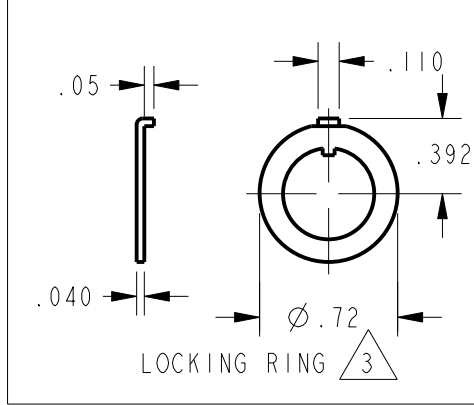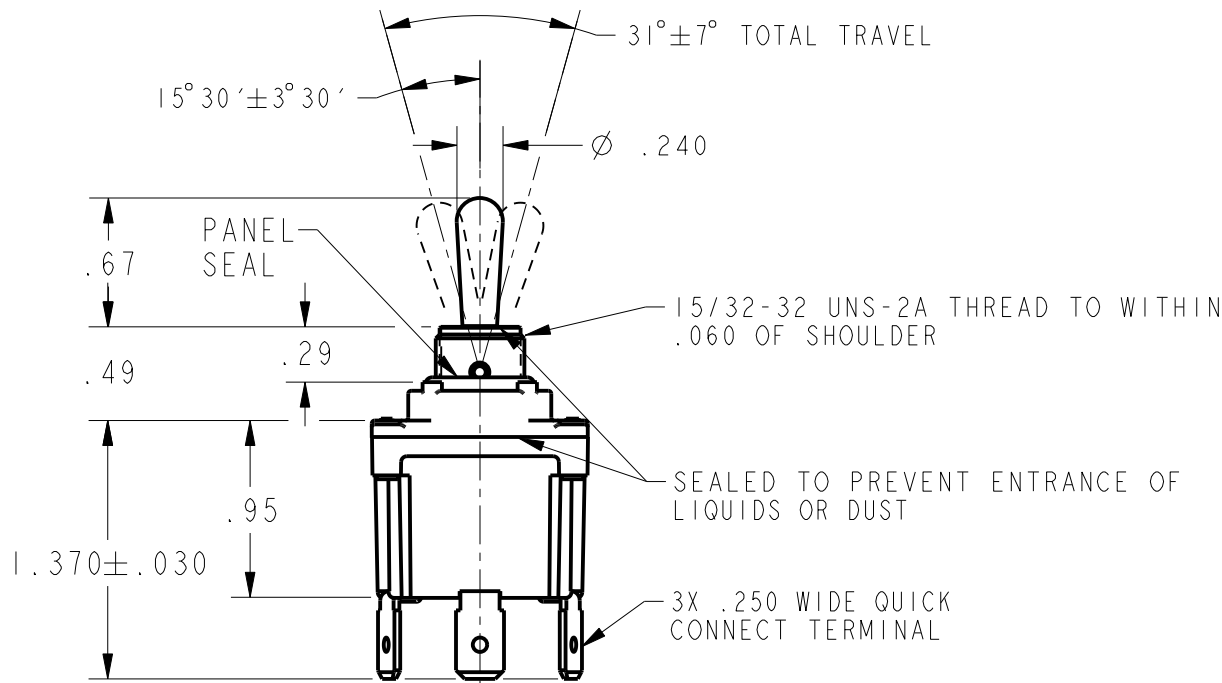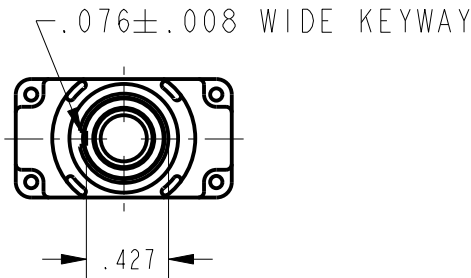

NOTES

- 1 - SWITCH WILL WITHSTAND TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD  
2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH  
3 - FURNISHED UNASSEMBLED  
4 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS  
5 - TO ORDER WITHOUT HARDWARE ADD (-NH) SUFFIX TO CATALOG LISTING

THIRD ANGLE PROJECTION	
	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	.07 LB APPROX

ANSI Y14.5M-1982 APPLIES