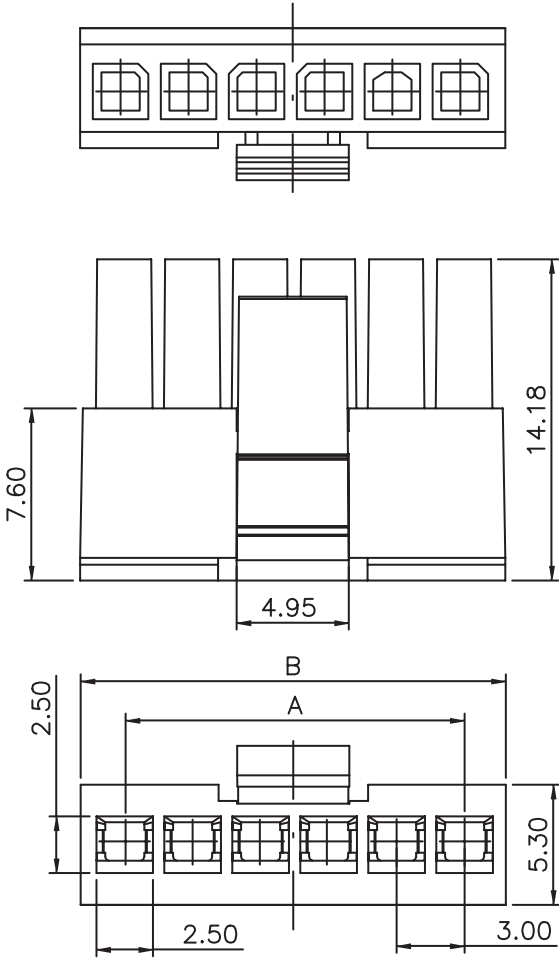


TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: NYLON 66
COLOR: BLACK
PITCH: 3.00MM


ENVIRONMENTAL
OPERATING TEMPERATURE: -25 UP TO 105°C
FLAMABILITY RATING: UL94-V0
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 5A
WORKING VOLTAGE: 250V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1500V AC/MN

STANDARD
UL CERTIFIED: E323964

PACKAGING
BAG

DIMENSION
A = 3.00 x (NB. PIN - 1)
B = 3.00 x (NB. PIN) + 0.85

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15	 WÜRTH ELEKTRONIK	DESCRIPTION: 3.00MM FEMALE SINGLE ROW RECEPTACLE	SIZE A4
G								
F	27-SEP-12	PLASTIC	GG					
E	06-JUL-12	PLASTIC	GG					
D	18-NOV-09	STANDARD	JP					
C	23-AVR-09	PACKAGING	JC	APPROVAL: RJ	UNIT: MM SCALE: SHEET: 1/2 DRAW: PEARL	WERI PART NO: 662 0xx 013 322		
B	01-MAR-07	PDF	EC					
A	08-JUN-06	ROHS	CEL KING					
REV	DATE	FILE	BY					

1		2		3		4		5																																											
Note: 1.Dimension: Carton Size:40*28*28(cm) 2.Quantity: <table><tr><td>Pin.</td><td>Pcs/Bag</td><td>Pcs/Carton</td><td>Pin.</td><td>Pcs/Bag</td><td>Pcs/Carton</td></tr><tr><td>2</td><td>1000</td><td>14000</td><td>8</td><td>500</td><td>5000</td></tr><tr><td>3</td><td>1000</td><td>14000</td><td>9</td><td>500</td><td>5000</td></tr><tr><td>4</td><td>1000</td><td>10000</td><td>10</td><td>250</td><td>3500</td></tr><tr><td>5</td><td>1000</td><td>10000</td><td>11</td><td>250</td><td>2500</td></tr><tr><td>6</td><td>1000</td><td>6000</td><td>12</td><td>250</td><td>2500</td></tr><tr><td>7</td><td>500</td><td>6000</td><td></td><td></td><td></td></tr></table>										Pin.	Pcs/Bag	Pcs/Carton	Pin.	Pcs/Bag	Pcs/Carton	2	1000	14000	8	500	5000	3	1000	14000	9	500	5000	4	1000	10000	10	250	3500	5	1000	10000	11	250	2500	6	1000	6000	12	250	2500	7	500	6000			
Pin.	Pcs/Bag	Pcs/Carton	Pin.	Pcs/Bag	Pcs/Carton																																														
2	1000	14000	8	500	5000																																														
3	1000	14000	9	500	5000																																														
4	1000	10000	10	250	3500																																														
5	1000	10000	11	250	2500																																														
6	1000	6000	12	250	2500																																														
7	500	6000																																																	