


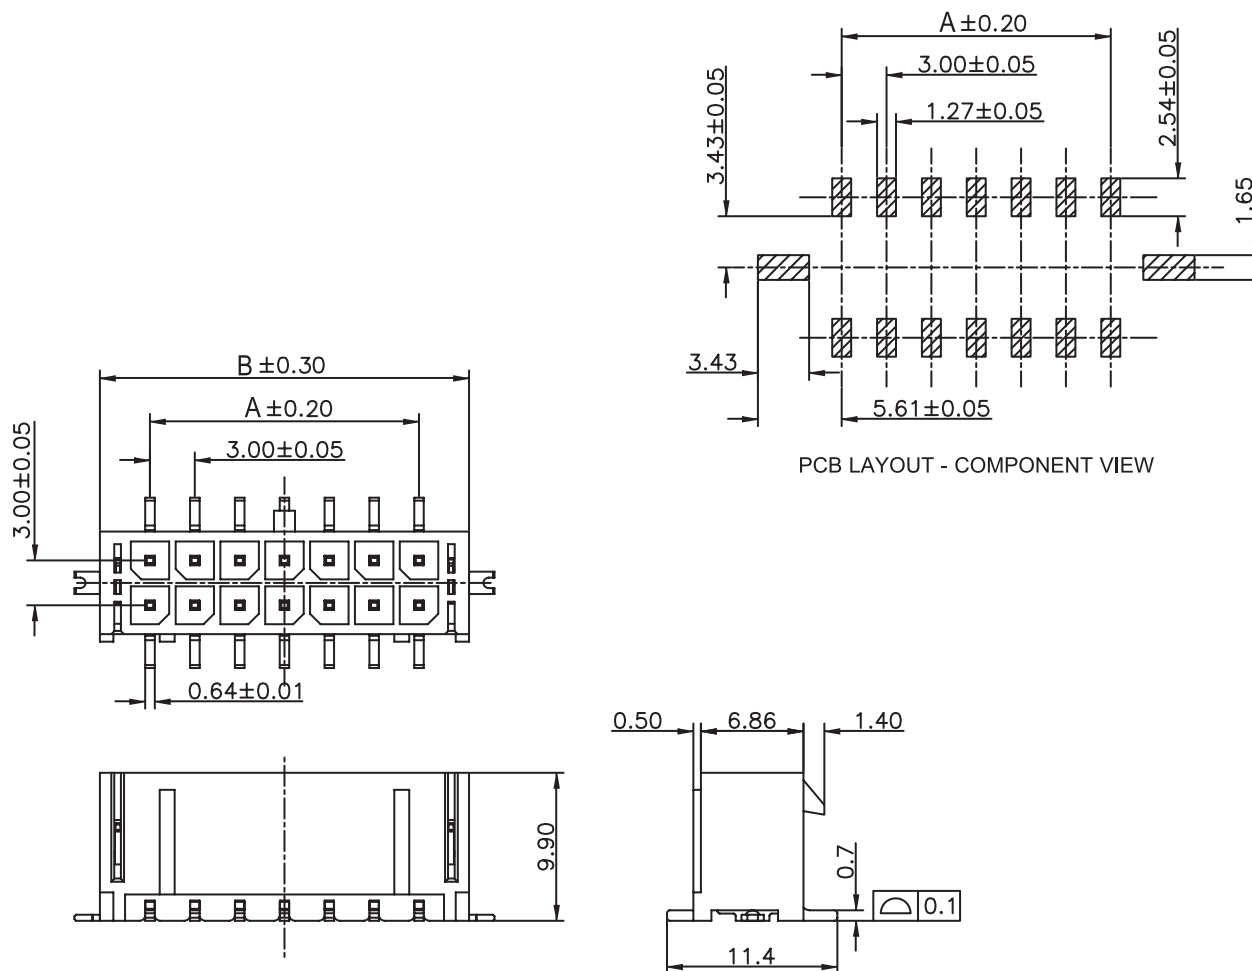

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: LCP
 FLAMABILITY RATING: UL94-V0
 COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: TIN
 QUALITY CLASS: 25 MATING CYCLES
 PITCH: 3.00MM

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
 CURRENT RATING:5A
 WORKING VOLTAGE: 250V AC
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 1500V AC/MN
 CONTACT RESISTANCE: 10 mOHM MAX


STANDARD
 CERTIFIED: E323964


SOLDERING
 REFLOW PROCESS ONLY

PACKAGING
 TRAY

DIMENSION
 A = 3.00 x (NB. PIN / 2 - 1)
 B = 3.00 x (NB. PIN / 2 + 1) + 0.70

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 SIZE A4	
L	29-JUL-13	DWG & CARAC	QL				
K	21-JAN-13	DIM A & B MOD	QL				
J	06-JUL-12	PLASTIC	GG	APPROVAL: RJ	UNIT: MM	DESCRIPTION: 3.00MM MALE DUAL ROW SMT VERTICAL HEADER WITH SMT SOLDER TAB	
I	22-FEB-12	DESCRIPTION	GG		SCALE:		
H	29-AUG-11	PACKAGING	JP		SHEET: 1/2	WERI PART NO: 662 0xx 231 822	
REV	DATE	FILE	BY		DRAW: PEARL		

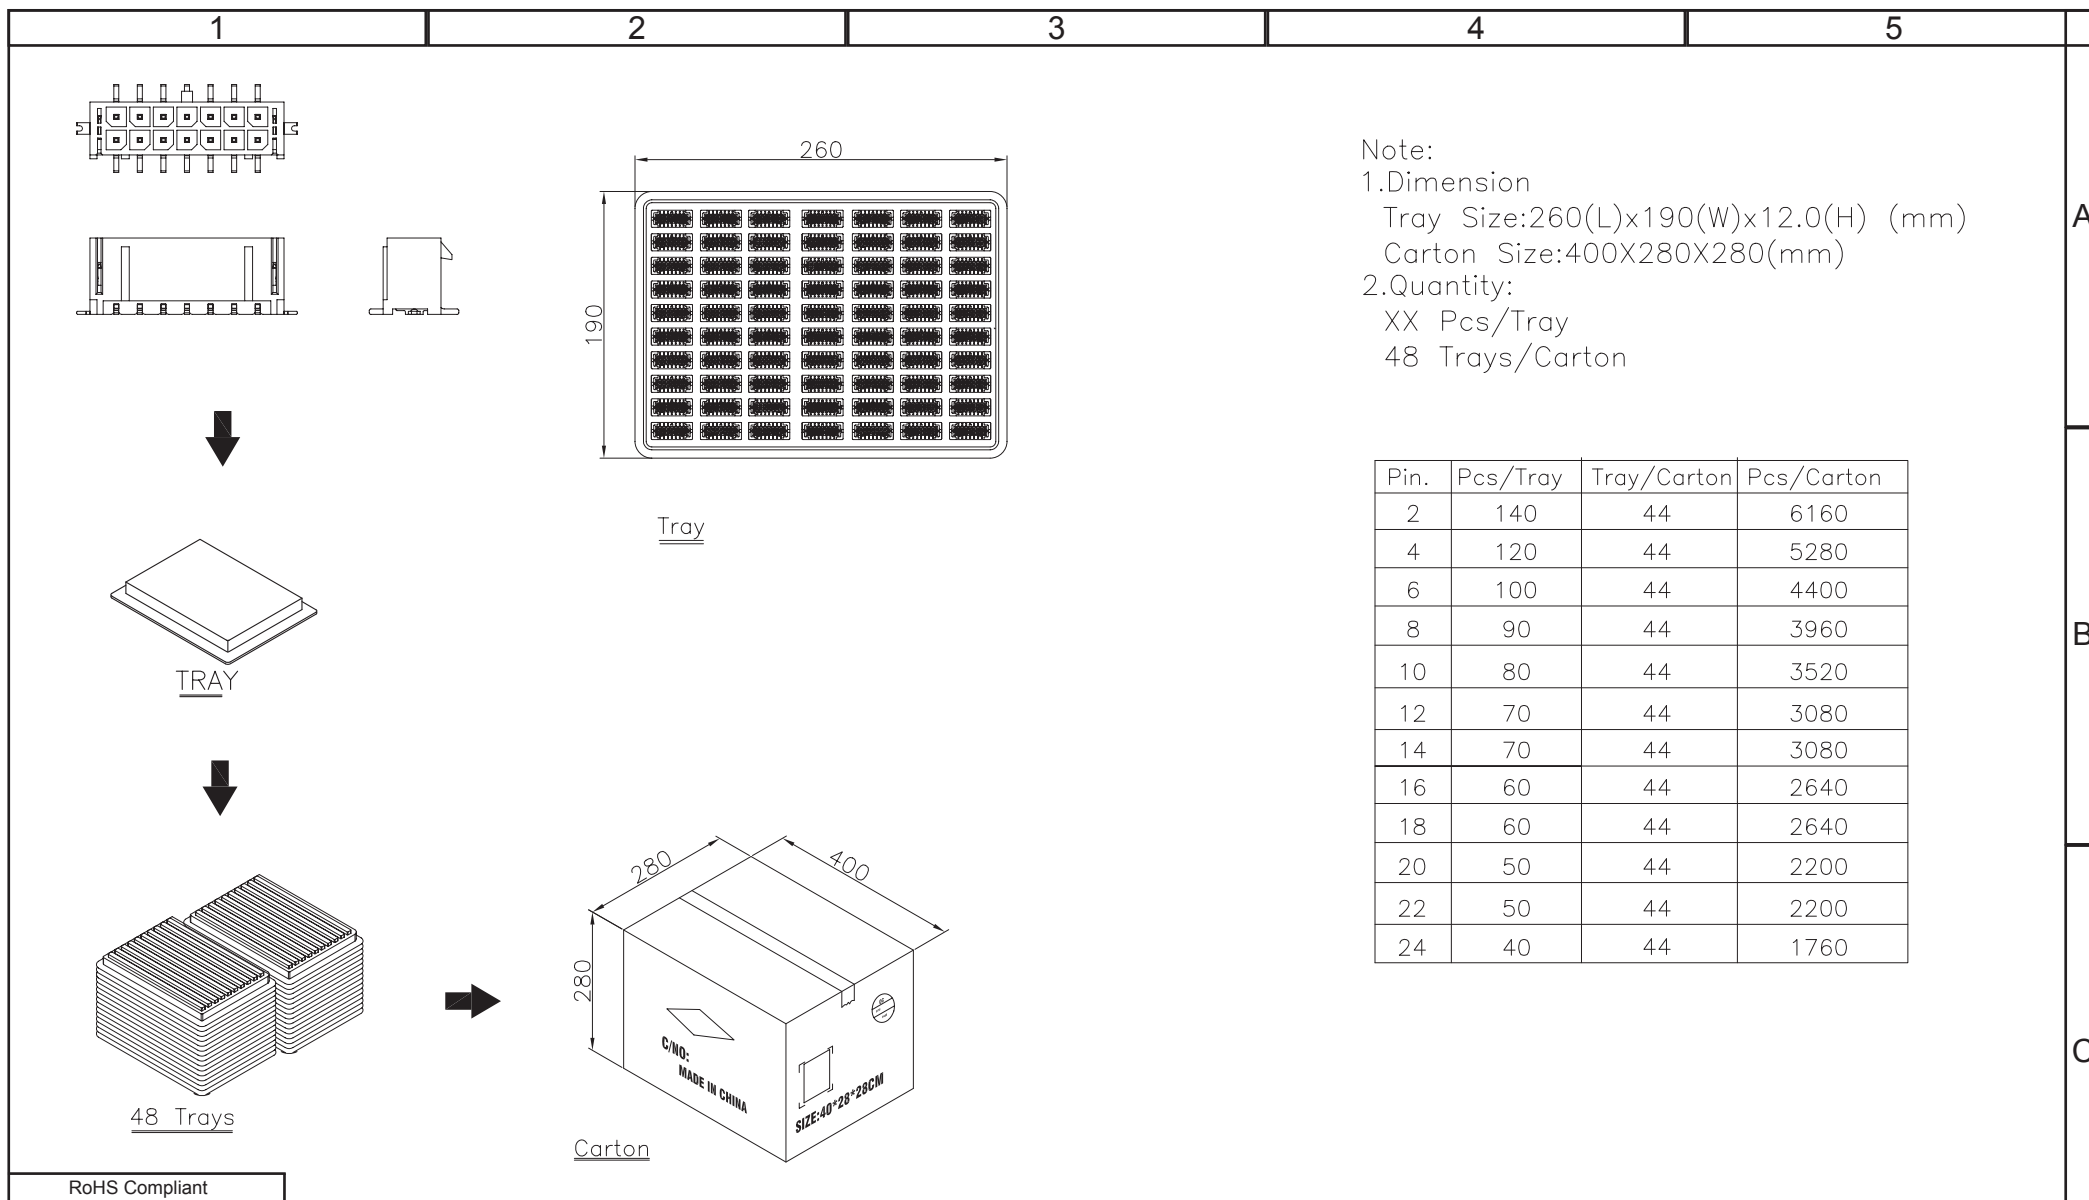

RoHS Compliant				PROJECTION:	GENERAL TOLERANCE	 DESCRIPTION: 3.00MM MALE DUAL ROW SMT VERTICAL HEADER WITH SMT SOLDER TAB WERI PART NO 6620 xx 231822_TPK		SIZE A4
G					.X = +/- 0.2 .XX = +/- 0.15			
F								
E□								
D□								
C□								
B□				APPROVAL: RJ	UNIT: MM	DESCRIPTION: 3.00MM MALE DUAL ROW SMT VERTICAL HEADER WITH SMT SOLDER TAB WERI PART NO 6620 xx 231822_TPK		SIZE A4
A□					SCALE:			
REV	DATE	FILE	BY		SHEET: 2/2			
					DRAW: PEARL			