
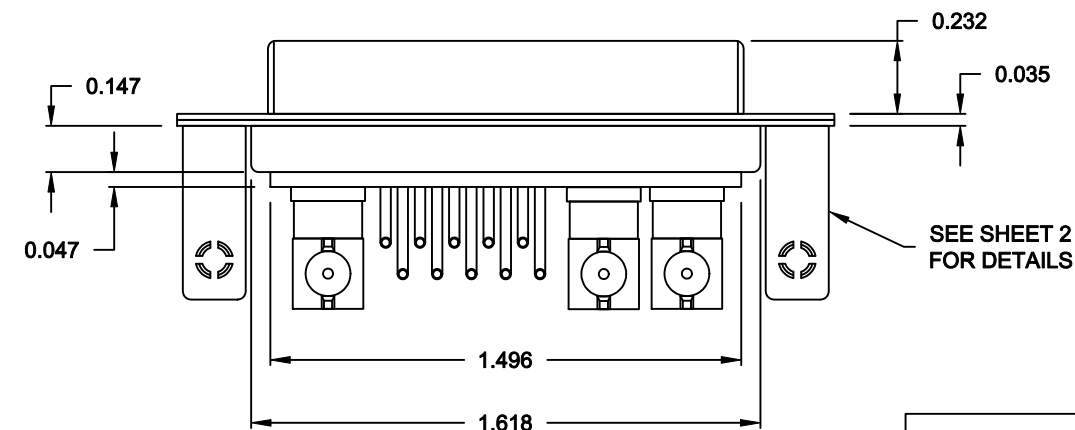


DESCRIPTION: COAXIAL / SIGNAL - RIGHT ANGLE - FEMALE

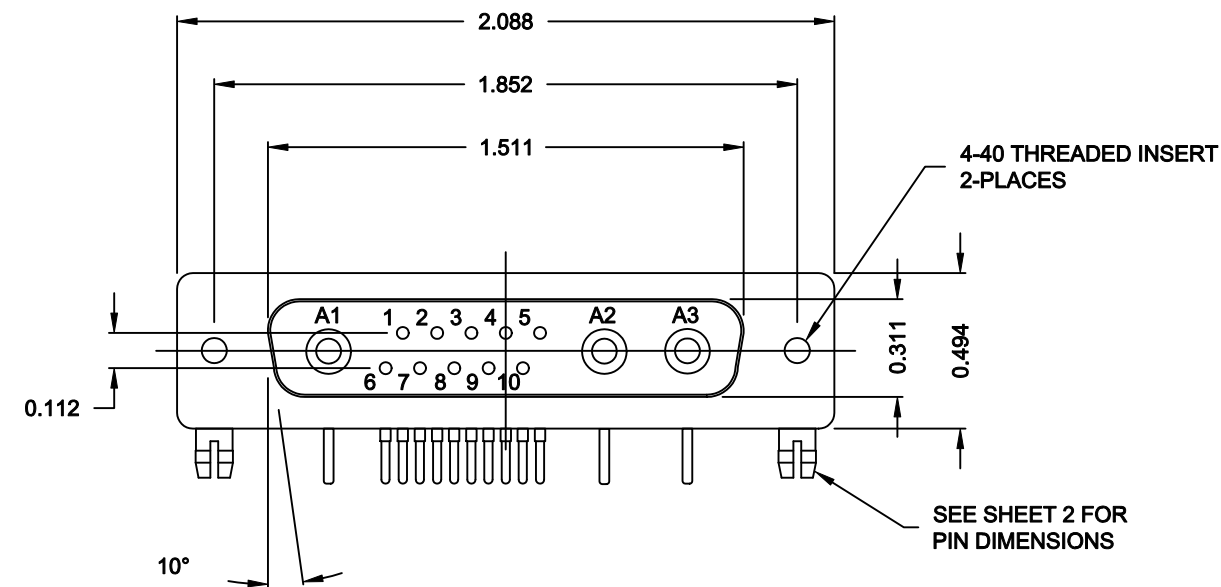

SPECIFICATIONS:

**ELECTRICAL:**  
INSULATOR RESISTANCE: 5,000 MegOHMS Min.  
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.  
OPERATING TEMPERATURE: -55° C ~ +125° C  
CONTACT RESISTANCE: 30 MilliOHMS Max.  
COAXIAL PINS: 50 OHM  
SIGNAL PINS: 5 AMPS

**MECHANICAL:**  
CONTACT INSERTION FORCE: 4.5 Kg Max.  
CONTACT SEPARATOR FORCE: 0.3Kg Min.

**MATERIALS:**  
CONTACTS: BRASS  
INSULATOR: PBT UL94V-0 RATED,  
230°C PROCESS TEMP.  
STEEL  
  
SHELL:  
  
FINISH:  
SHELL: NICKEL

68513W3203L461

46 = 4-40 INSERTS /  
BOARD LOCKS

RoHS COMPLIANT

|                                                                                      |                                                                                                                                                                                             |                           |                 |                   |          |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------|-------------------|----------|
|  | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWN:<br>C. SMITH        |                 | DATE:<br>10-11-06 |          |
|                                                                                      |                                                                                                                                                                                             | CHECKED:                  |                 | DATE:             |          |
|                                                                                      |                                                                                                                                                                                             | SCALE:<br>1.5 = 1         | SHEET<br>1 OF 2 |                   | REV<br>4 |
| <h1>NorComp</h1>                                                                     |                                                                                                                                                                                             | DWG NO.<br>68513W3203L461 |                 |                   |          |

