


DESCRIPTION: COAXIAL / SIGNAL - RIGHT ANGLE - MALE

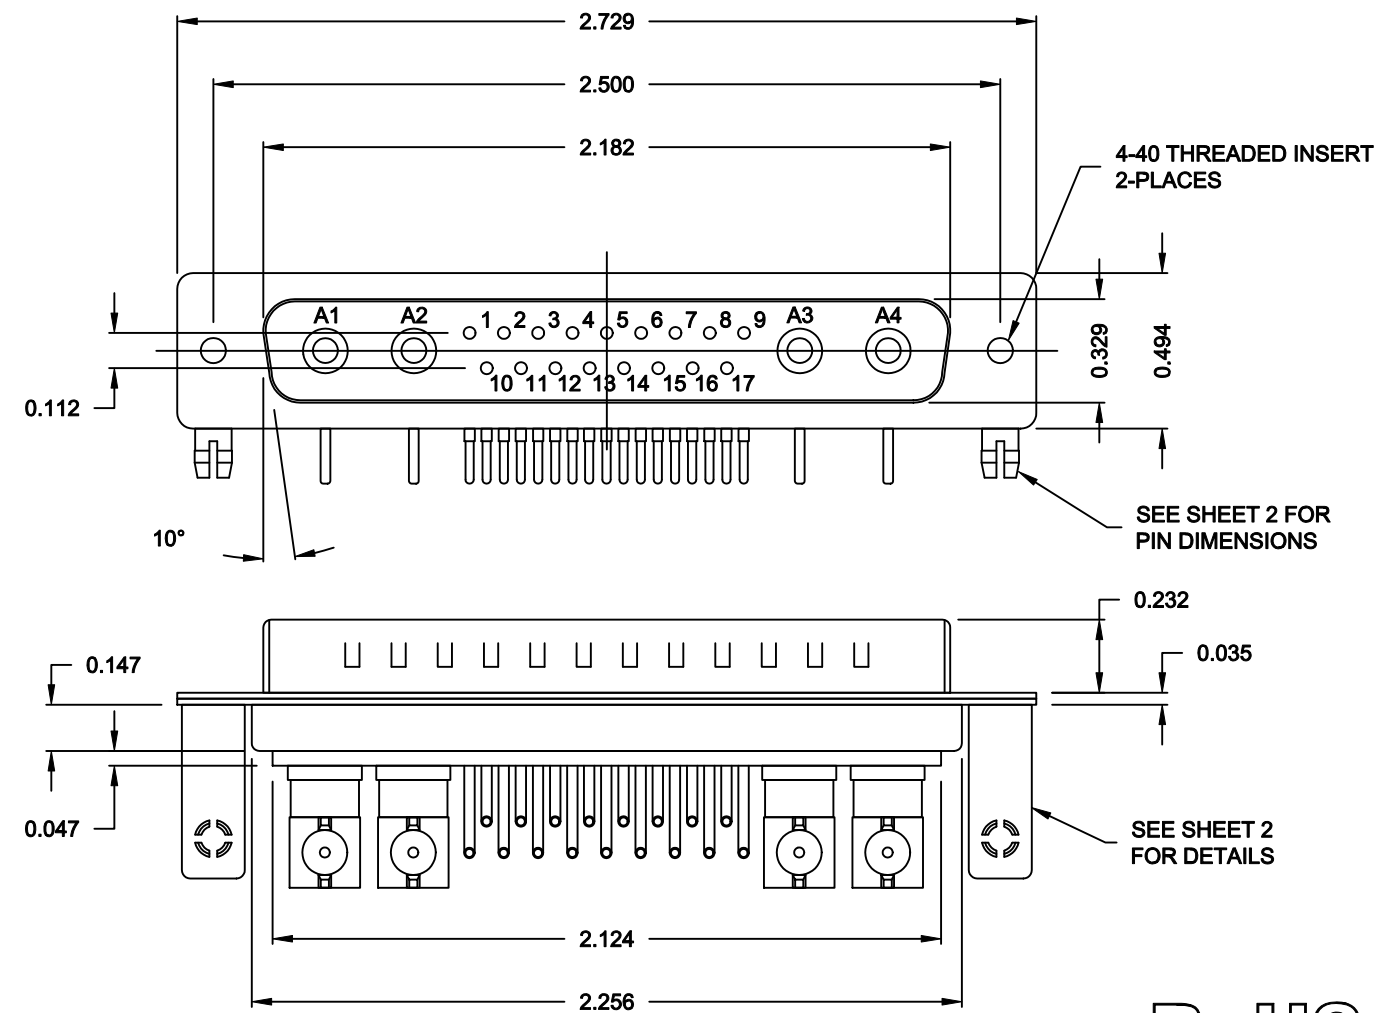

SPECIFICATIONS:

ELECTRICAL:
INSULATOR RESISTANCE: 5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.
OPERATING TEMPERATURE: -55° C ~ +125° C
CONTACT RESISTANCE: 30 MilliOHMS Max.
COAXIAL PINS: 50 OHM
SIGNAL PINS: 5 AMPS

MECHANICAL:
CONTACT INSERTION FORCE: 4.5 Kg Max.
CONTACT SEPARATOR FORCE: 0.3Kg Min.

MATERIALS:
CONTACTS: BRASS
INSULATOR: PBT UL94V-0 RATED, 230°C PROCESS TEMP.
STEEL
SHELL:
FINISH: NICKEL
SHELL: NICKEL



68521WA4PL461

46 = 4-40 INSERTS / BOARD LOCKS


RoHS COMPLIANT

 NorComp	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 10-11-06	
		CHECKED:		DATE:	
		SCALE: 1.5 = 1	SHEET 1 OF 2		REV 2
		DWG NO. 68521WA4PL461			


NOTE:
POWER CONTACTS COME
PRE-LOADED INTO INSULATORS

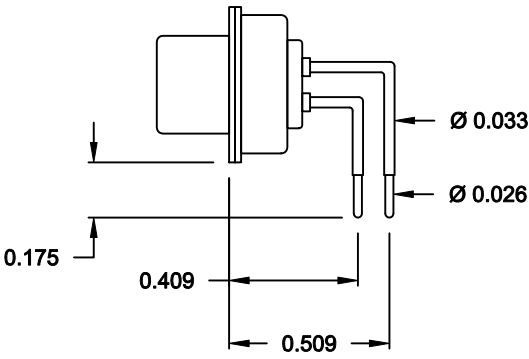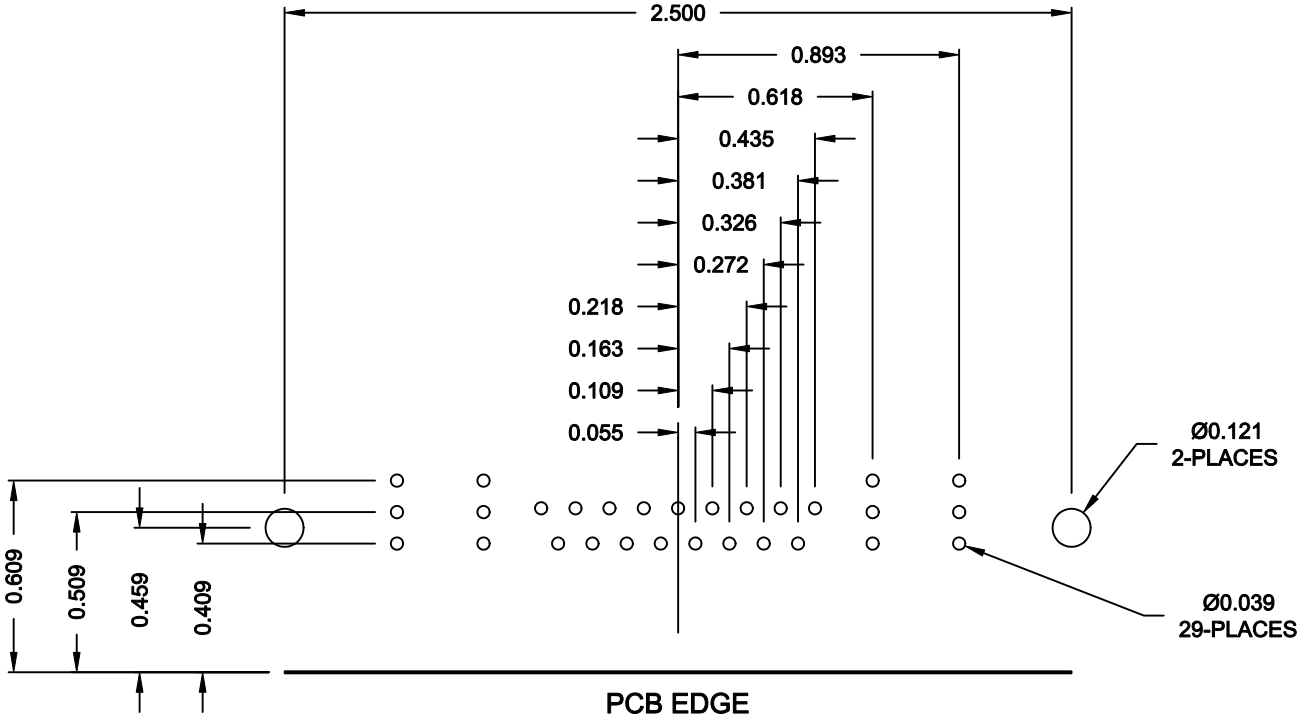

SIGNAL CONTACTS

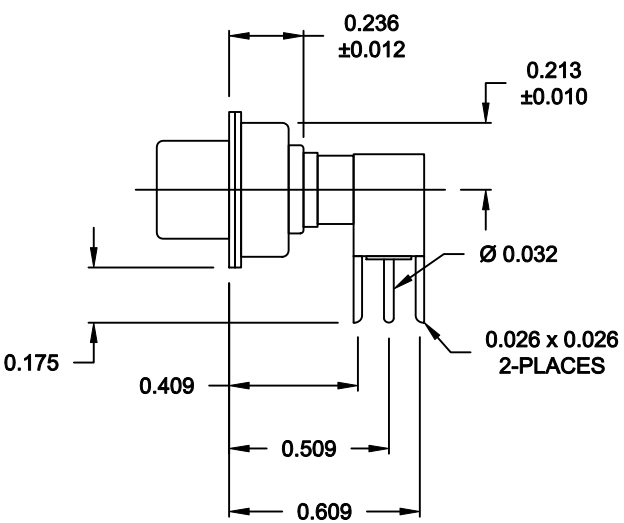

50 OHM COAXIAL CONTACT

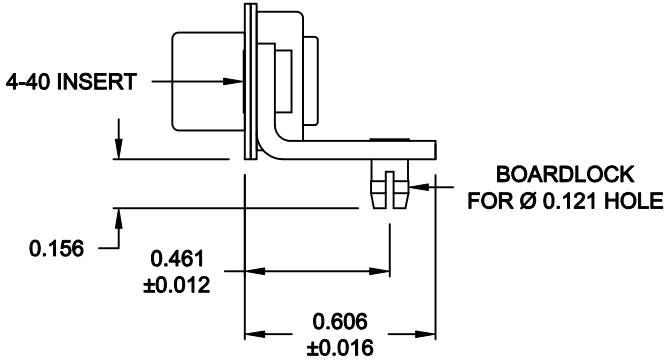

MOUNTING HARDWARE

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 10-11-06	
		CHECKED:		DATE:	
NorComp	SCALE: 1.5 = 1		SHEET 2		OF 2
	DWG NO.		68521WA4PL461		
	REV 2				