

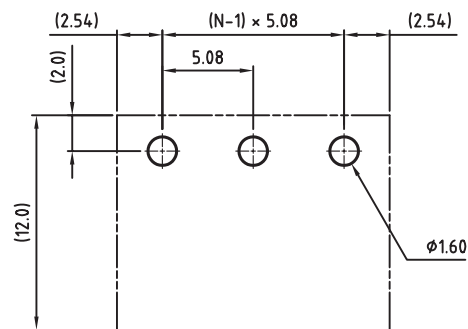
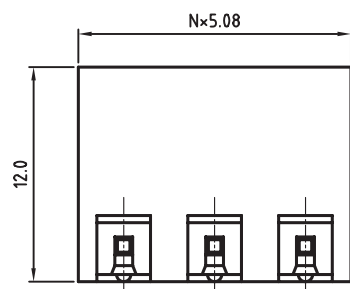




PCB LAYOUT - COMPONENT VIEW



TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PBT

FLAMABILITY RATING: UL94-V0

COLOR: GREEN

CONTACT PIN: BRASS (CuZn)

SOLDER TAIL PLATING: TIN

ENVIRONMENTAL

OPERATING TEMPERATURE: -40 UP TO 105°C

COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING:

WORKING VOLTAGE:

WITHSTANDING VOLTAGE:

CONTACT RESISTANCE: 20 mOhm MAX

cULuS

20A

300VAC

1.6KV

20 mOhm MAX

VDE

20A

300VAC

2.5KV

MECHANICAL

PITCH: 5.08MM

SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

SERIE 312

CERTIFICATION



RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15		DESCRIPTION: SERIE 312 - 5.08MM OPEN HORIZONTAL PCB HEADER WR-TBL WERI PART NO: 691 312 510 0xx	SIZE	A4
G									
F									
E									
D									
C				APPROVAL: RJ	UNIT: MM				
B	29-OCT-08	CHARACTERISTICS	JP		SCALE:				
A	31-OCT-07	PDF	EC		SHEET: 1/1				
REV	DATE	FILE	BY		DRAW: MARVIN				