


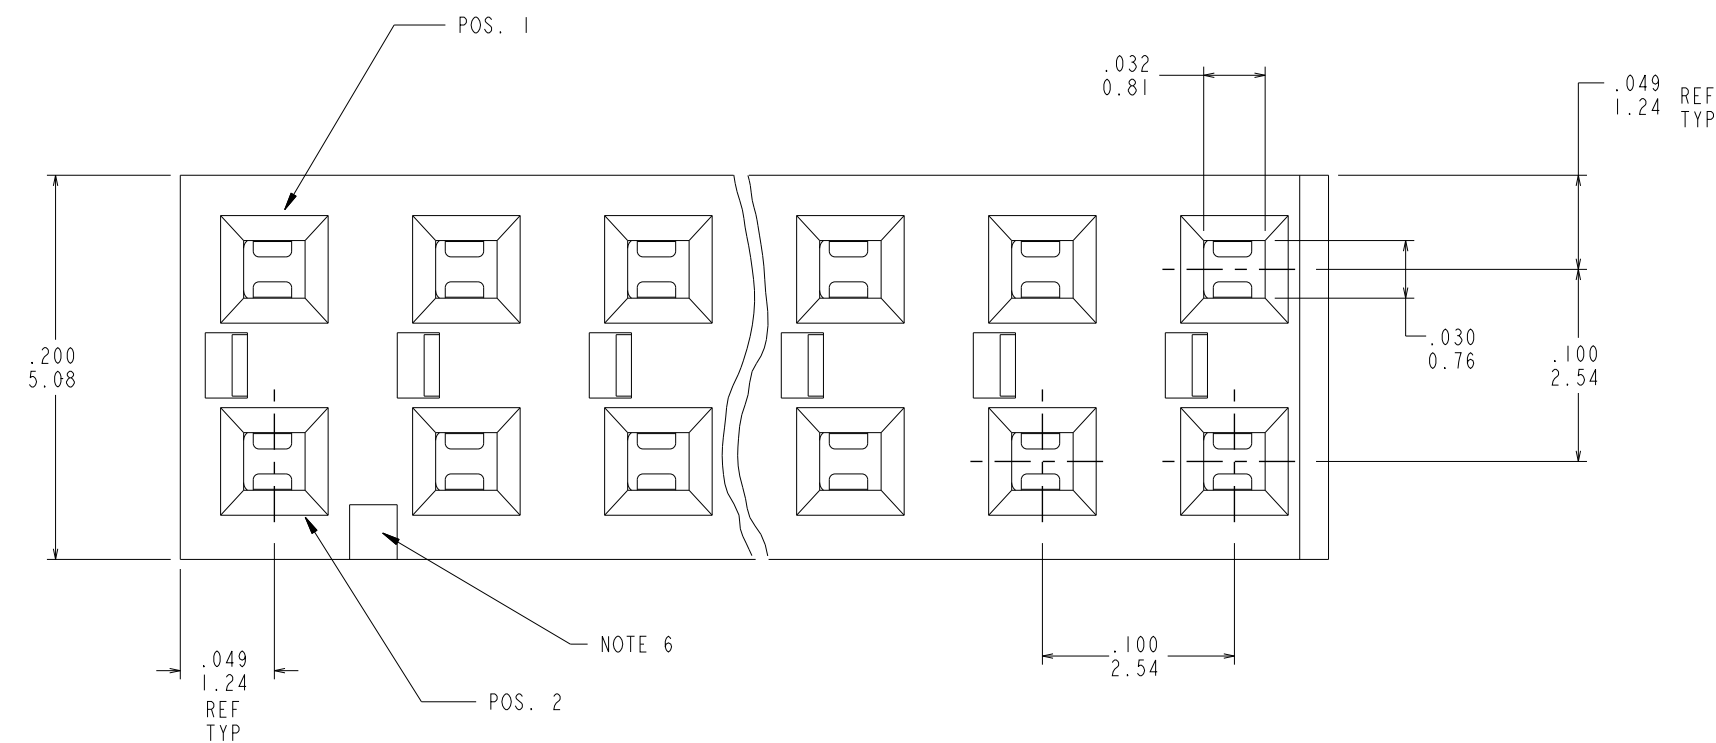


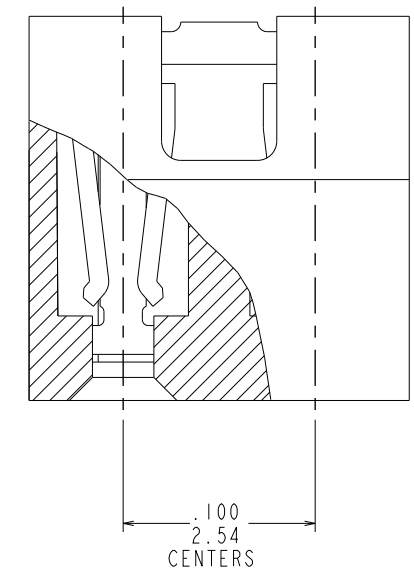

Copyright FCI.

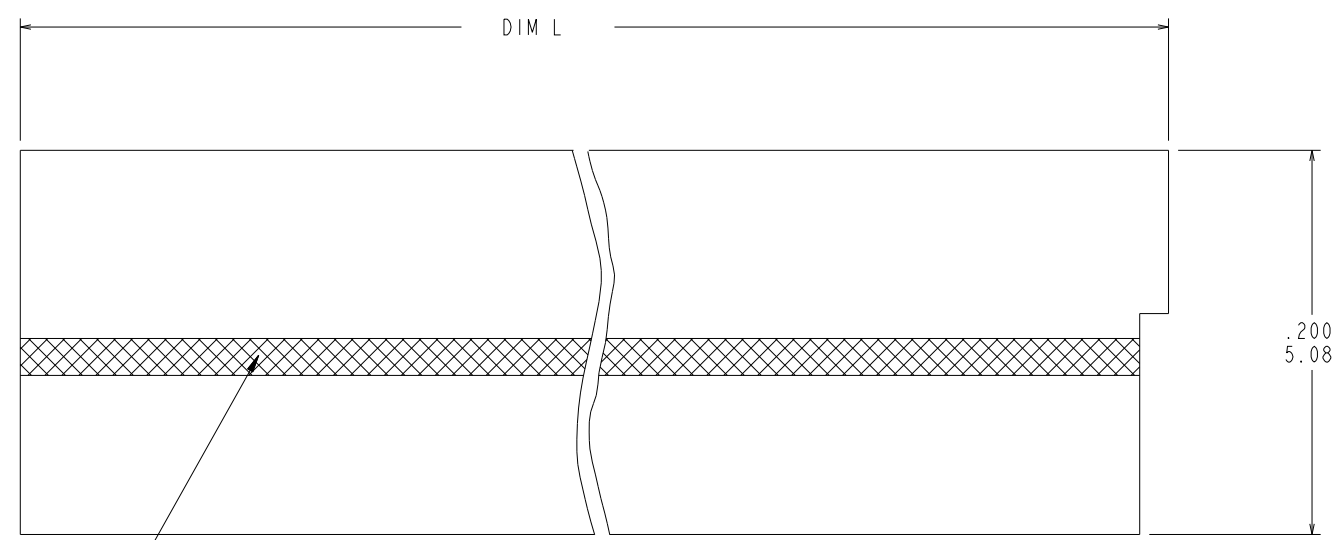

spec ref				dr		Yong Huang	2010/10/25	projection		INCH/MM		size		A3	scale		DRAWING SCALE							
tolerance std				TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Zheng-Kun Hu	2013/08/19					ecn no		ELX-N-15535-1						
								chr		-	-					rel level		Released						
								appr		Rick Bian	2013/08/20					product family								
surface 				linear		0.X		±0.5				title		D.R.MULTI POSITION PROFILE JUMPER ASS'Y				dwg no		69145		rev		R
						0.XX		±0.3																
						0.XXX		±0.13																
						angular		0°																
				www.fci.com		cat. no.				Product - Customer Drw				sheet 1 of 2										



Copyright FCI.

D

PRODUCT No.	NO. OF POS.	DIM L	DESC PRODUCT NUMBER ON -8XX SERIES ONLY	SELECT LOADING		LEAD FREE OPTION
69145-X04	2 X 2	.1980/5.029	WWWWW-04	NO		NOTE 5
↑ -X06	2 X 3	.2980/7.569	WWWWW-06	NO		
-X08	2 X 4	.3980/10.109	WWWWW-08	NO		
-X10	2 X 5	.4980/12.649	WWWWW-10	NO		
-X12	2 X 6	.5980/15.189	WWWWW-12	NO		
-X14	2 X 7	.6980/17.729	WWWWW-14	NO		
-X16	2 X 8	.7980/20.269	WWWWW-16	NO		
↓ -X18	2 X 9	.8980/22.809	WWWWW-18	YES		
69145-X20	2 X 10	.9980/25.349	WWWWW-20	NO	1-2 9-10 17-18 ONLY FOR 69145-518	


PLATINGS;

-1XX 15u"/.38u Au or GXT CONTACT AREA

-2XX 30u"/.76u Au or GXT CONTACT AREA

-3XXLF 100u"/2.54u Sn CONTACT AREA

-----4XX-Au-FLASH-OVER-50u"-Ni-CONTACT-AREA----- OBSOLETE

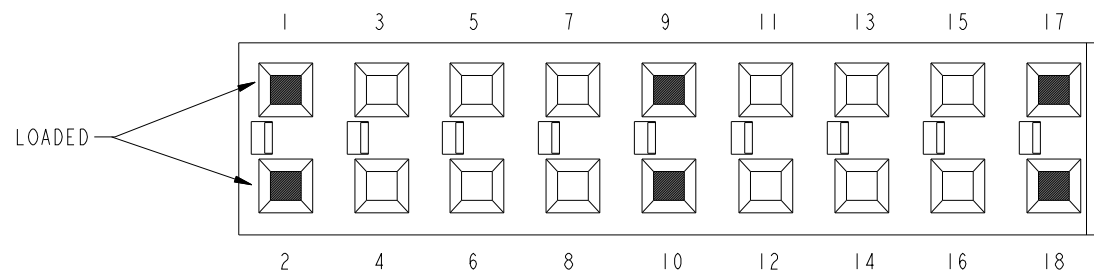

LOADED POSITIONS
PIN ENTRANCE
(BOTTOM)

spec ref				dr	Yong Huang	2010/10/25	projection 	INCH / MM 	size	A3	scale	DRAWING SCALE	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Zheng-Kun Hu	2013/08/19			ecn no	ELX-N-15535-1			
				chr	-	-			rel level			Released	
				appr	Rick Bian	2013/08/20			product family				
surface 	linear	0.X	±0.5		title D.R. MULTI POSITION PROFILE JUMPER ASS'Y				dwg no	69145		rev	R
		0.XX	±0.3										
		0.XXX	±0.13										
	angular	0°	±°	www.fci.com	cat. no.		Product - Customer Drw				sheet 2 of 2		

NOTES:

- ① .MATERIAL' POLYESTER. FLAME RETARDENT PER UL-94-V0. COLOR - BLACK
2. RECOMMENDED APPLICATION DATA'
 - A. ALL MATING PINS TO BE .025/.64 SQ. ON TRUE CENTER OF GIVEN TERMINAL SPACING WITHIN .015/.38 DIA.
 - B. SUGGESTED MATING PIN LENGTH .160/4.06 MIN.
- 3 69145-518 SELECT LOADED WITH 30u"/.76u GOLD CONTACTS.
4. .005/0.13 RECESS PERMISSABLE AT THIS LOCATION FOR ASSEMBLY PROCESSING.
- ⑤. ADD ''LF'' SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- ⑥. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
7. THIS PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.
8. PRODUCT SPECIFICATION: BUS-12-071.

ISO 1302

ISO 406
ISO 1101

XXXXX-XYLFF

BASE NUMBER

LEAD FREE OPTION
No. OF POSITIONS
PLATING CODE

NOTE 3

NOTE 5