

FED. MFR. CODE 91929

6AS16

SWITCH - BASIC

(M) 6A516
ISSUE 2

REPLACES

RELEASE NO.

6AS16

**DRAWING
NUMBER**

1

5

20

VIBIG

CO 11:

APR.

COM
NOW

CO14

DEC
CO-

JAN
NOV

CO-
7520

1 FEB

•


•

• •

•

0970

○

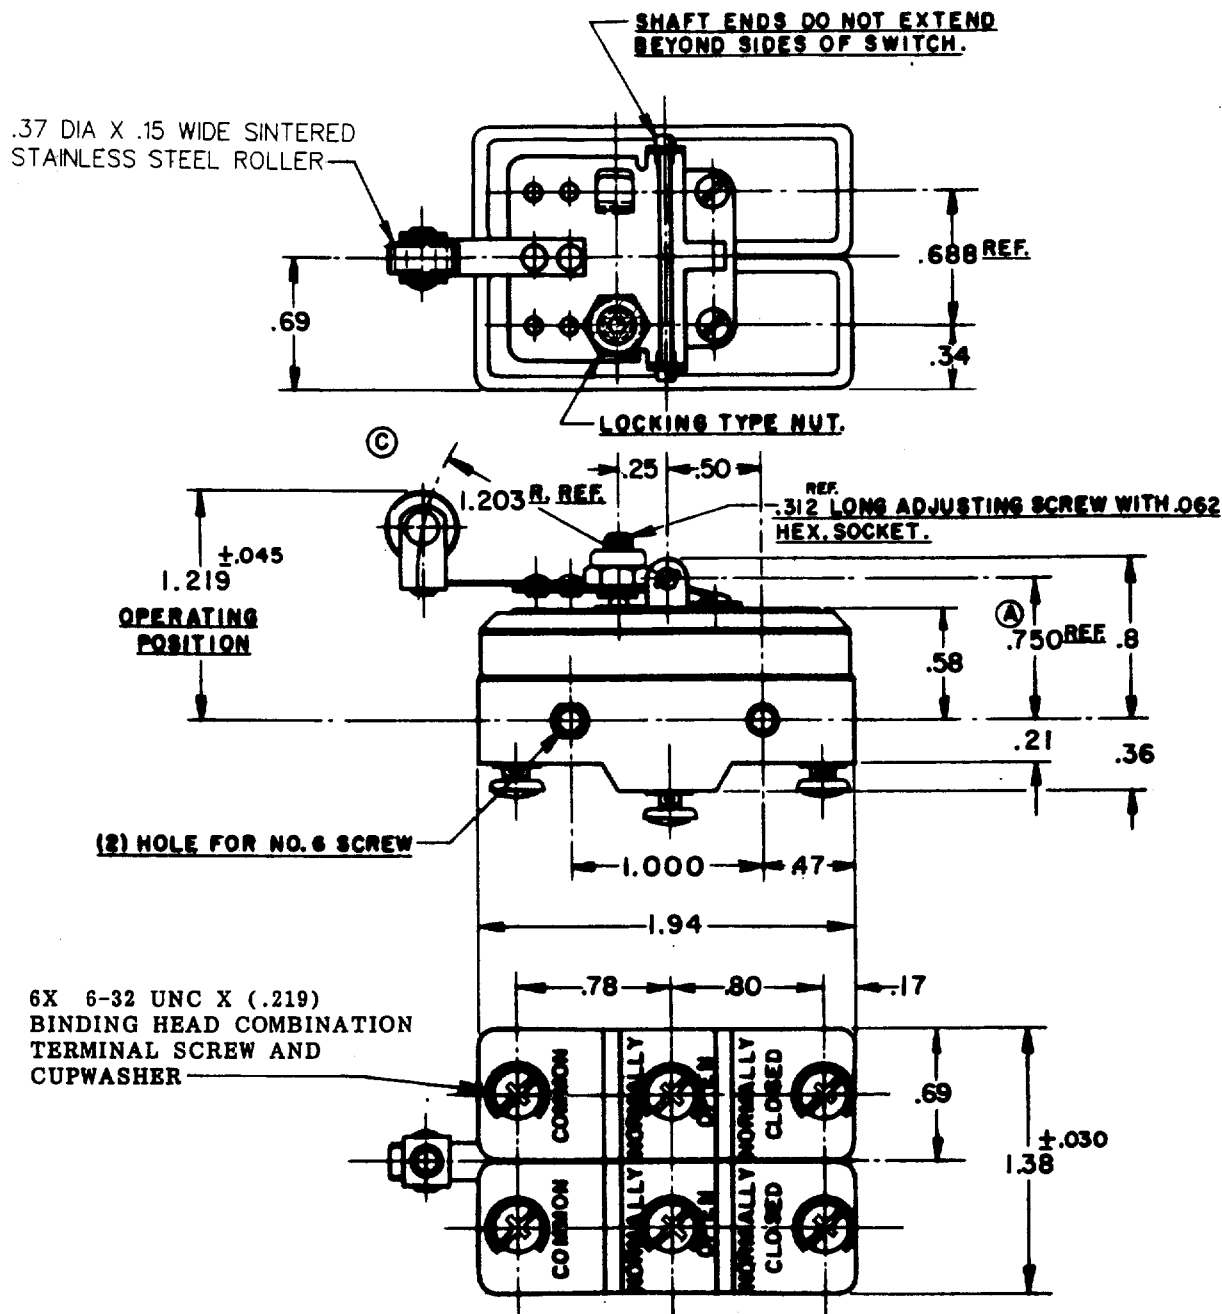

NOTE -

1- ADJUSTING SCREW IS PROVIDED TO ADJUST OPERATING POSITIONS FOR
SIMULTANEOUS OR SEQUENCE OPERATION.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MONEYSWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL
OPERATING FORCE- - - - - 14 OZ. MAX.		CONTACT ARRANGEMENT (2) S. P. D. T.	BREAK DISTANCE .020 MIN.	DO NOT SCALE PRINT
RELEASE FORCE- - - - - 4 OZ. MIN.		UNDERWRITERS' LAB. INC. LISTED RATING 20 A-125, 250 OR 400 VAC 10 A-125 VAC "L" 1 HP-125 VAC, 2 HP-250 VAC 1/2 A-125 VDC, 1/4 A-250 VDC		UNLESS OTHERWISE SPECIFIED
				DIMENSIONS ARE IN INCHES TOLERANCES ARE:
DIFFERENTIAL TRAVEL- - - -.156 MAX.	-L23-			ONE PLACE (.0) ±.005 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
OVERTRAVEL- - - - - .040 MIN.		(B)		WEIGHT