

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

6AS201

S

6AS201

M

DRAWING
NUMBER

10

ISSUE

REPLACES

PR-3584

RELEASE NO.

CHECK

05 MAR 05

AK

CHECK

05 MAR 05

AK

CHECK

25 SEP 73

25 SEP 73


CHECK

25 SEP 73

25 SEP 73

REVISIONS

A	CO33364	RER	25 APR 74
B	CO-36890	JAL	29 APR 75
C	CO67209	JAP	2 MAY 90
D	CO-70184	JWB	19 DEC 91
E	CO-70184	JWB	19 AUG 92
F	CO-73287-J	JAL	22 NOV 93
G	CO-75204B	JWB	1 FEB 94
H	CO-80938	DLT	12 JUN 95
J	0011610	NM	05 MAR 05

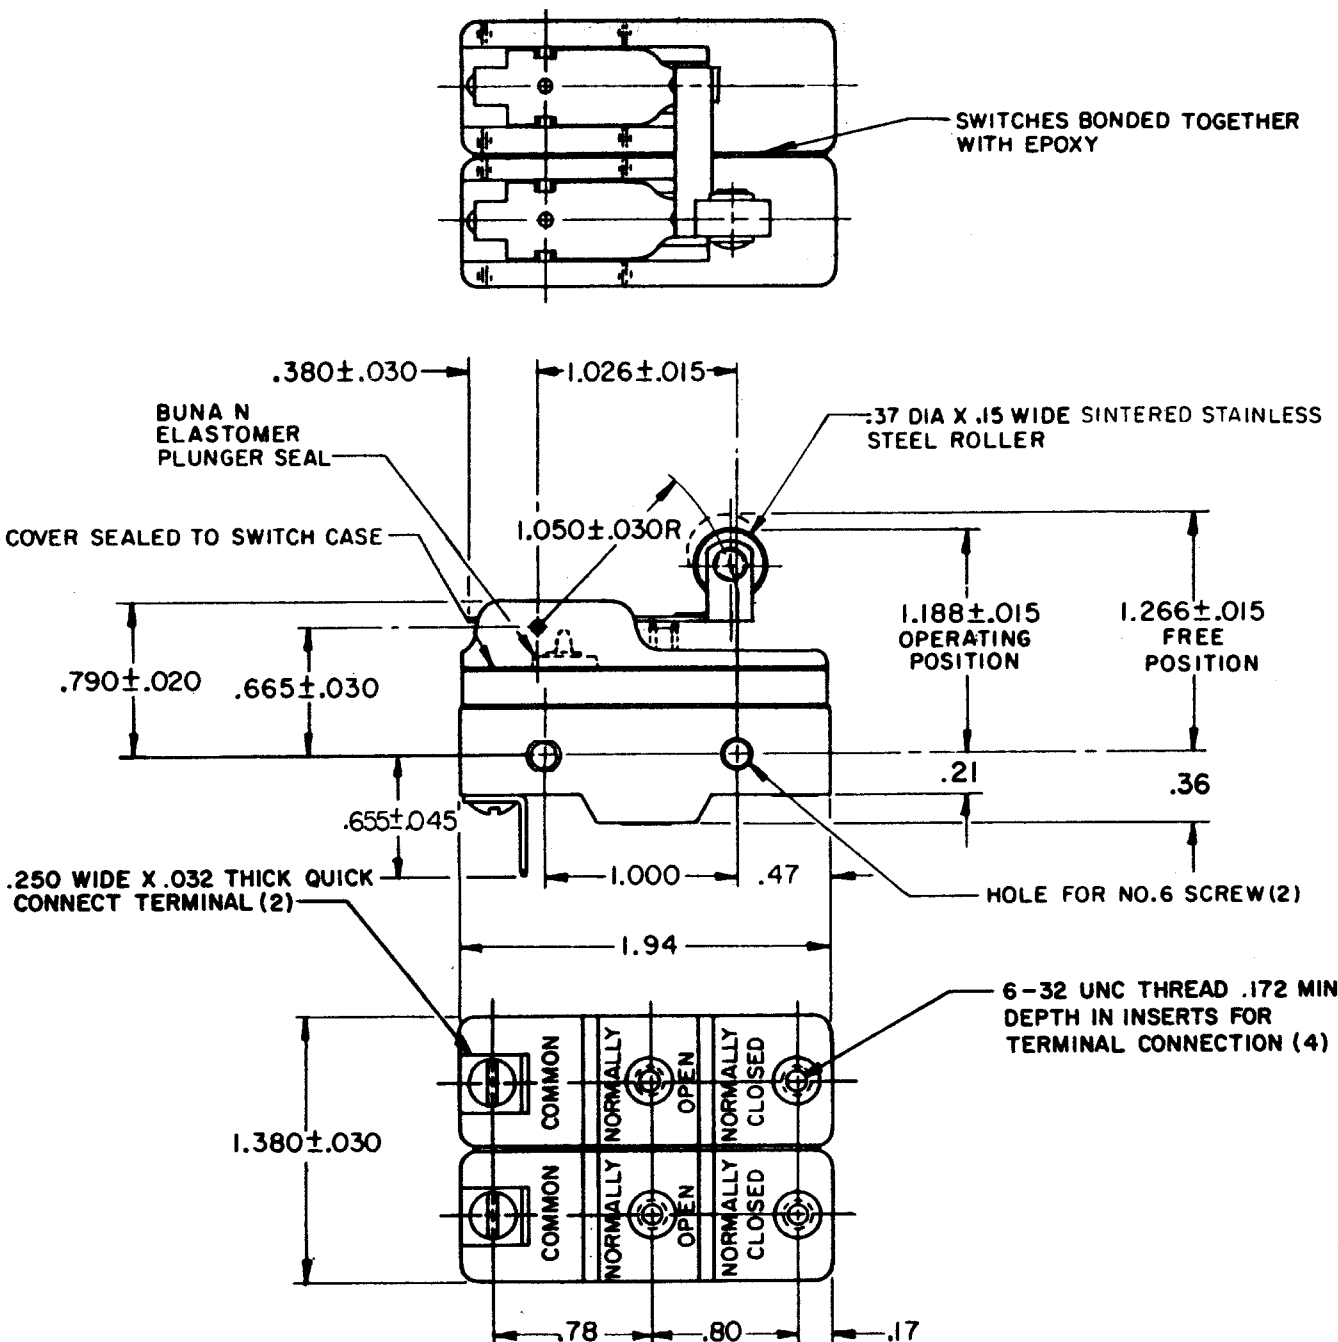

NOTE -
1 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
2 - 6-32 UNC X .219 REF BINDING HEAD COMBINATION TERMINAL SCREW (4), FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 15 OZ MAX
RELEASE FORCE ----- 1 1/2 OZ MIN
DIFFERENTIAL TRAVEL ----- .050 MAX
OVERTRAVEL ----- .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (2)
L96
15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

SCALE FULL

DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE
ONE PLACE (.01) ± .030
TWO PLACE (.001) ± .015
THREE PLACE (.000) ± .005
ANGLES ±
WEIGHT

FO-52848

DRAWN

R C R 21 SEPT 73