

MICRO SWITCH

A DIVISION OF HONEYWELL-INTERNATIONAL, INC.
FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

6AS34

6AS34

M

DRAWING
NUMBER

7

8

ISSUE

8

REPLACES

RELEASE NO. S.R. 5990

4 JAN 57

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT


CNT

CNT

CNT

CNT

CNT

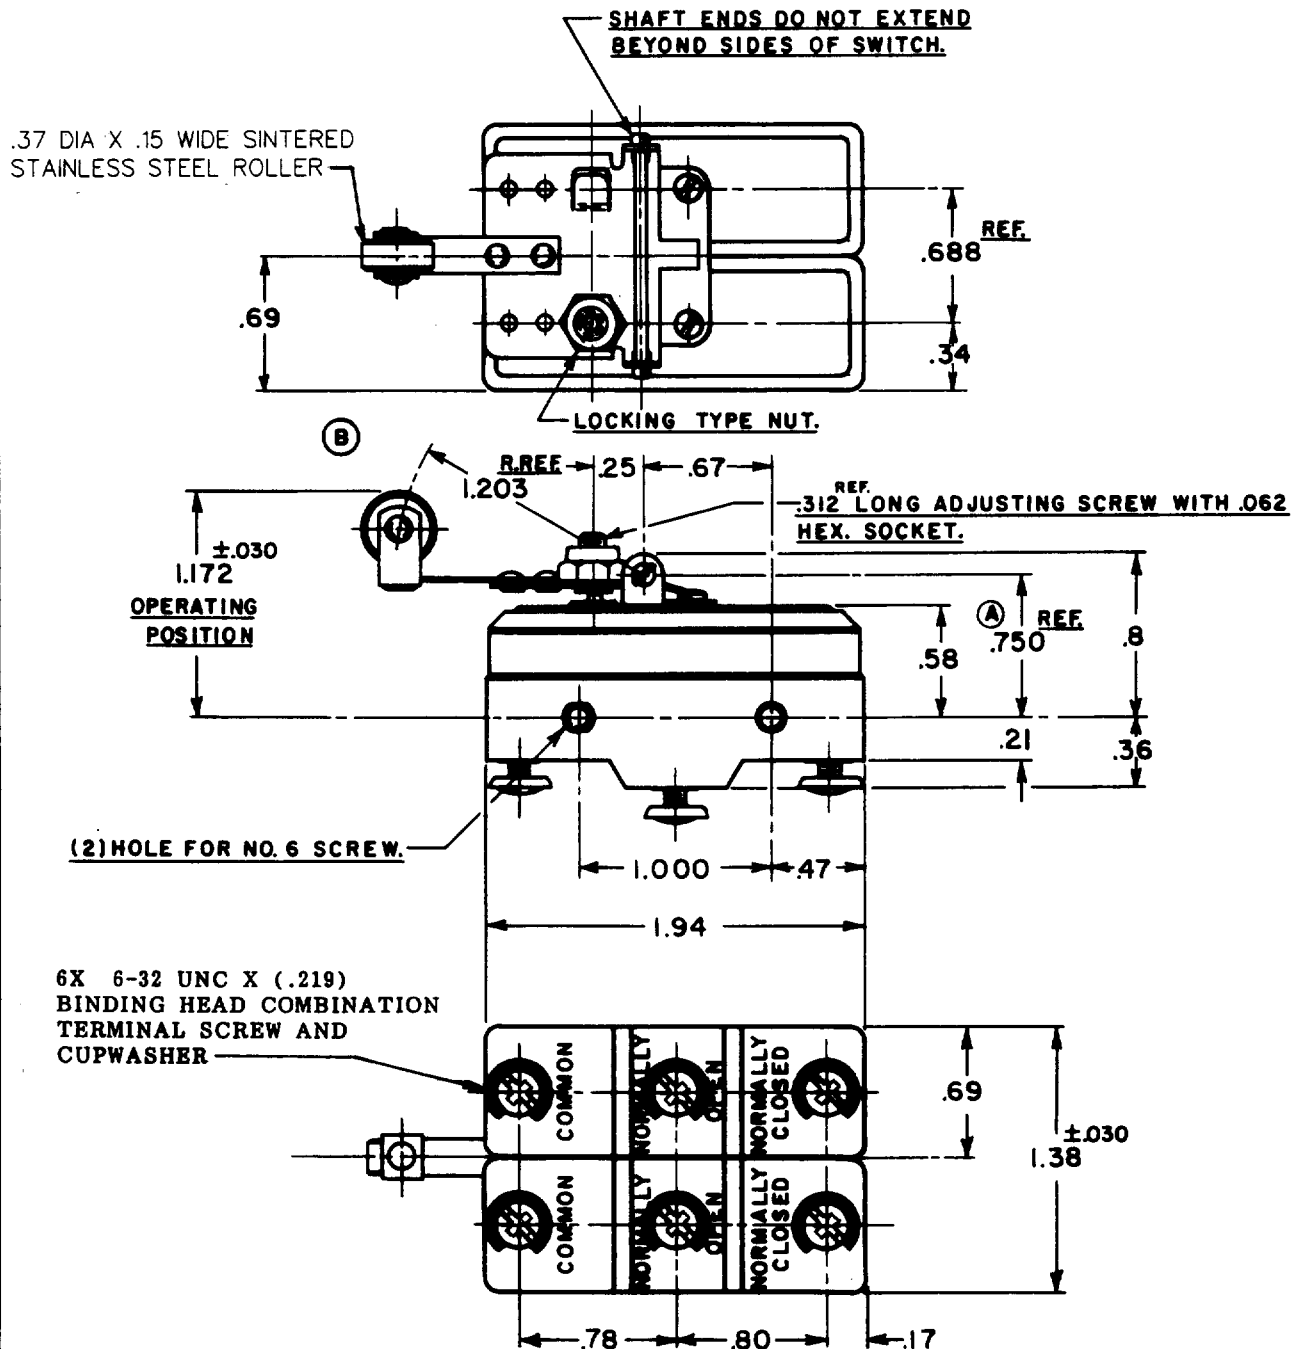

NOTE-

1-ADJUSTING SCREW IS PROVIDED TO ADJUST OPERATING POSITIONS FOR
SIMULTANEOUS OR SEQUENCE OPERATION.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 8 OZ. MAX.

RELEASE FORCE - - - - - 1/2 OZ. MIN.

DIFFERENTIAL TRAVEL - - - - .109 MAX.

OVERTRAVEL - - - - - .020 MIN.

ELECTRICAL DATA

CONTACT ARRANGEMENT
(2) S.P.D.T.

UNDERWRITERS' LAB. NOS. LISTED RATING
-L96- 15 A-125, 250, OR 400 VAC
1/2 A-125 VDC, 1/4 A-250 VDC
1/8 HP-125 VAC, 1/4 HP-250 VAC

SCALE - FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:
ONE PLACE (.0) ±.000
TWO PLACE (.00) ±.001
THREE PLACE (.000) ±.000
ANGLES ±

WEIGHT

0-80378

DRAWN

K. A. F.

9 JAN. 57

CHECK

GCH