

MICRO SWITCH

A DIVISION OF HONEYWELL-INTERNATIONAL, INC. MILWAUKEE, WISCONSIN

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

6AS5

6AS5

M

DRAWING
NUMBER

28

6

ISSUE

18

(M) 6AS5
ISSUE 1

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO 8520	K.F.M.	6 NOV. 66
B	0022234	M.B.F.	18 DEC 66
C	0025310	M.B.S.	23 JAN 69
D	42511	CO	19 FEB 79
E	CO-73287-J	JAL	22 NOV 93

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

6X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

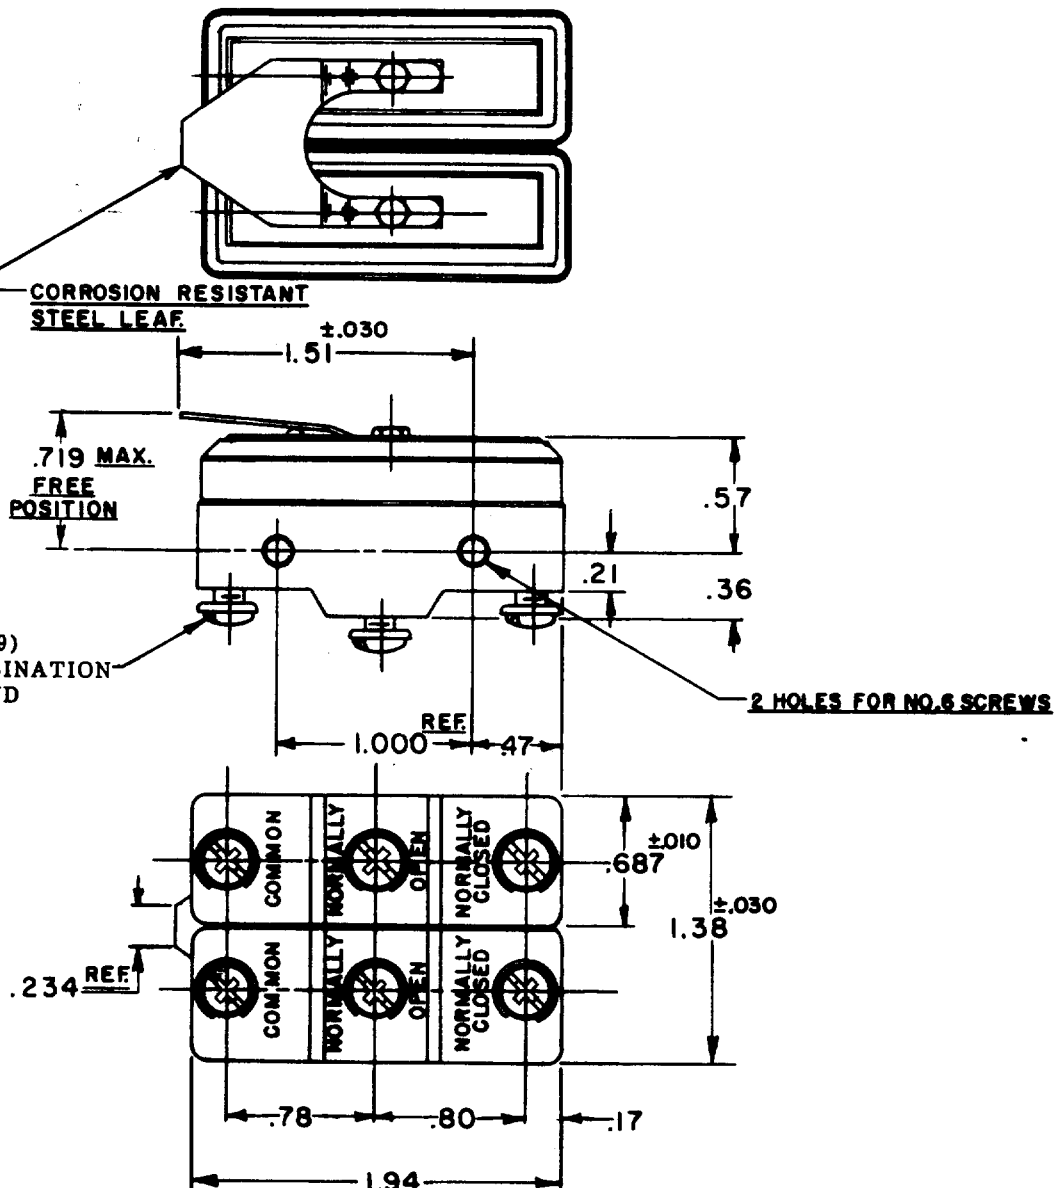

NOTE -

1-SWITCHES OPERATE WITHIN .030 (MOTION AT END OF LEAF) OF EACH OTHER.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

DO NOT OVERTRAVEL MORE THAN .060
OVERTRAVEL - - - - - .030 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
(2) S.P.D.T.

UNDERWRITERS LAB. INC. LISTED RATINGS
- L95- 15 A - 125, 250, OR 480 VAC
1/2 A - 125 VDC; 1/4 A - 250 VDC
1/8 HP - 125 VAC, 1/4 HP - 250 VAC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0)	±.030
TWO PLACE (.00)	±.015
THREE PLACE (.000)	±.005
ANGLES	±

WEIGHT

(B)

(C)

FO-80378

DRAWN

K.F.M. 6 NOV. 56

G.C.H. 9 Nov. 56

C.N.T. 7 Nov. 56