
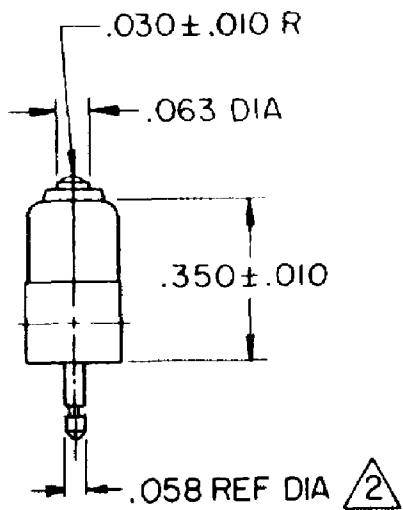
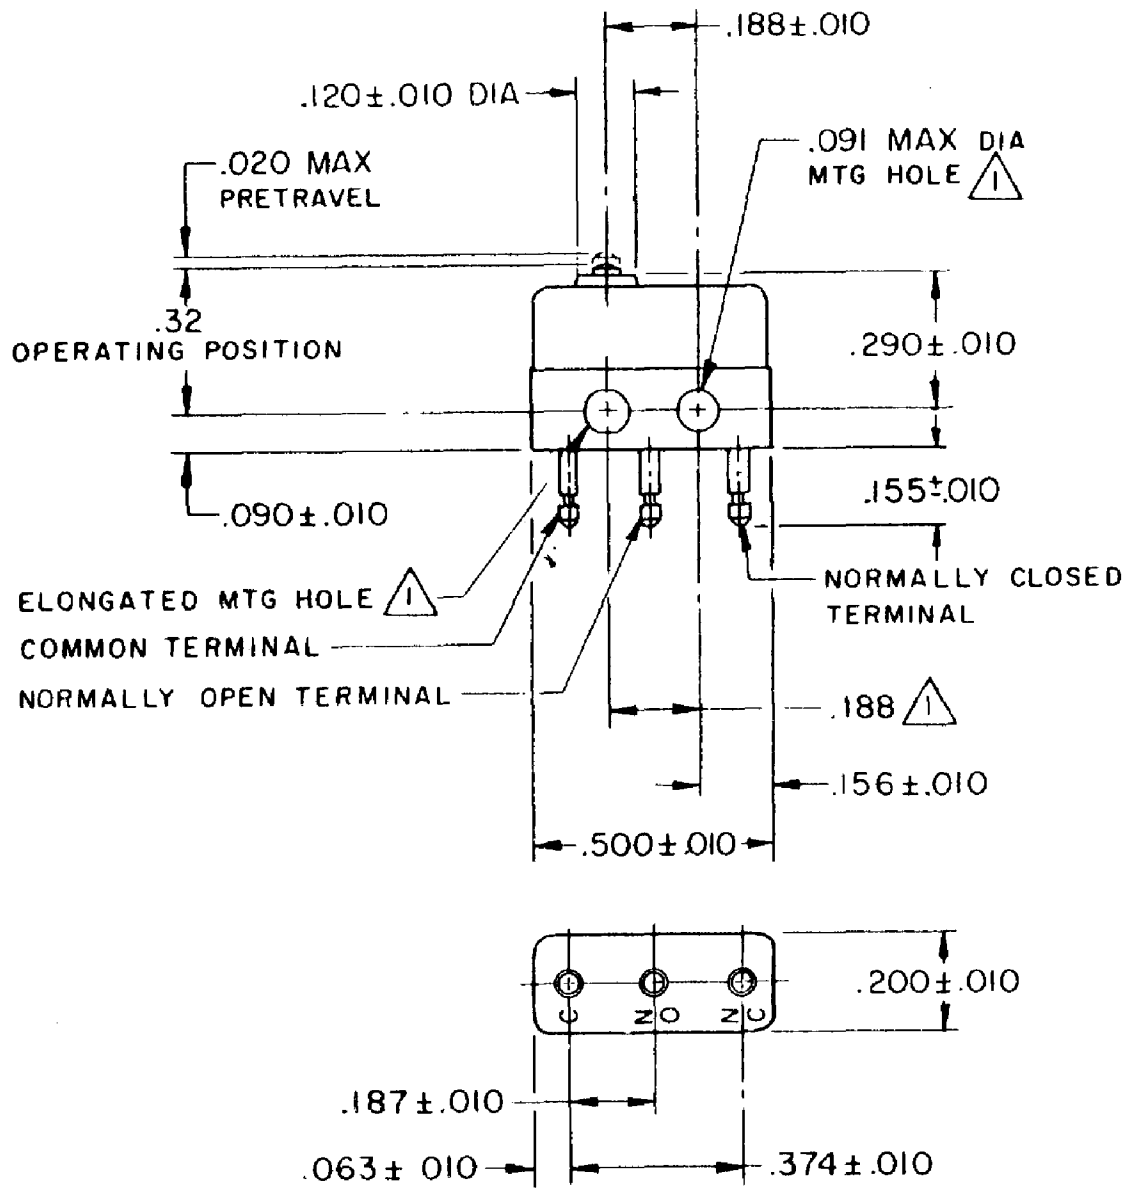


HONEYWELL PART NUMBER
6SX1-H58
PRODUCT CODE VDH0150

REV	DOCUMENT	CHANGED BY	CHECK
10	0087951	NMN 28MAR12	CMH

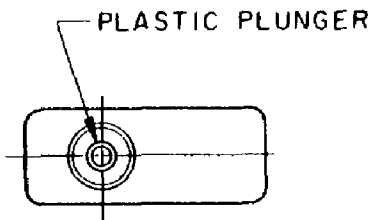

NOTES
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
2 PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES.

- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 400° F
4 - MOVABLE CONTACT MATERIAL - GOLD PLATED, GOLD ALLOY
5 - STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO. PR-2013
REPLACES

CHARACTERISTICS OPERATING FORCE - - - - 5 OZ MAX RELEASE FORCE - - - - - 1 OZ MIN DIFFERENTIAL TRAVEL - - - .005 MAX OVERTRAVEL - - - - - .004 MIN	ELECTRICAL DATA CONTACT ARRANGEMENT SPDT 30 VOLTS DC RATING SEA LEVEL 50,000 FT INDUCTIVE 0.5 AMP 0.5 AMP RESISTIVE 1 AMP 1 AMP MAXIMUM INRUSH 2 AMP KEMA CE 1A 250V~ T125 25E3 UL CSA 1 A 125 VAC	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± - THIRD ANGLE PROJECTION	DRAWN	SPK	08FEB08	Honeywell			
			CHECK	RJ	08FEB08				
			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC			
			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B	TYPE I	DRAWING NAME 6SX1-H58	REV 10
			RASTER			SCALE NONE	WEIGHT .003 LB MAX	SHEET 1 OF 1	