


FED. MFG. CODE 91929

CATALOG LISTING	
701PB542-WOG	
PAGE 1 OF 1	
RELEASE NO. PR-23327	
REPLACES	
6	
ISSUE	

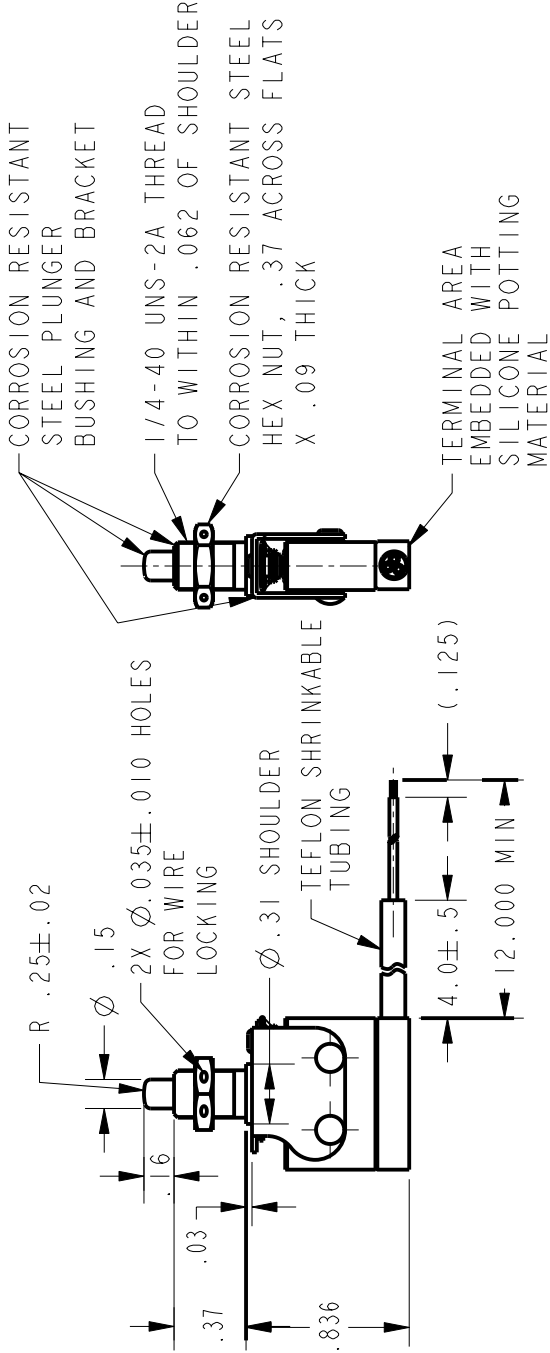

CHECK	
REVISIONS	
A	201097
S A V	18 AUG 00
B	201411
L J K	2 OCT 00
CHECK	
18 AUG 00	
CHECK	
SAV	

ANSI Y14.5M-1982 APPLIES

- NOTES
- 1 - UNIT INCLUDES "20HM4-1" TYPE BASIC SWITCH
 - 2 - RECOMMENDED FOR MANUAL OPERATION ONLY
 - 3 - FOR USE IN TEMPERATURE RANGE -65°F TO 392°F

THIRD ANGLE PROJECTION	
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.	
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE (.0)	
TWO PLACE (.00)	
THREE PLACE (.000)	
ANGLES	
±	
WEIGHT	
ELECTRICAL DATA	
CONTACT ARRANGEMENT	
2X S P D T	
28 VOLTS DC RATING	
INDUCTIVE ---SEA LEVEL---1/4 AMP	
70,000 FT---1/4 AMP	
RESISTIVE ---SEA LEVEL---1/2 AMP	
70,000 FT---1/2 AMP	
CHARACTERISTICS	
OPERATING FORCE --- 2 LBS MAX	
OVERTRAVEL FORCE --- 2.5 LBS MAX	
RELEASE FORCE --- 2 OZ MIN	
PRETRAVEL	
DIFFERENTIAL TRAVEL --- .031 MAX	
OVERTRAVEL --- .030 MIN	
FREE POSITION	