
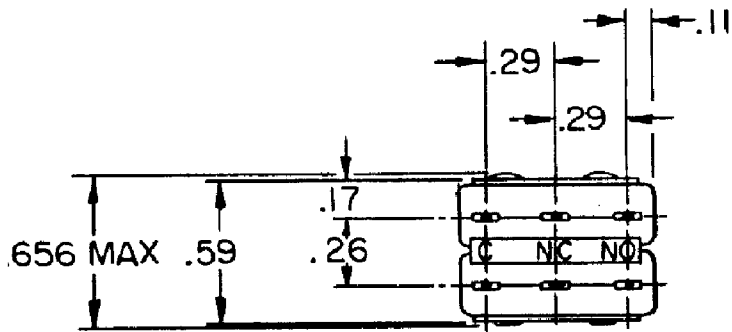
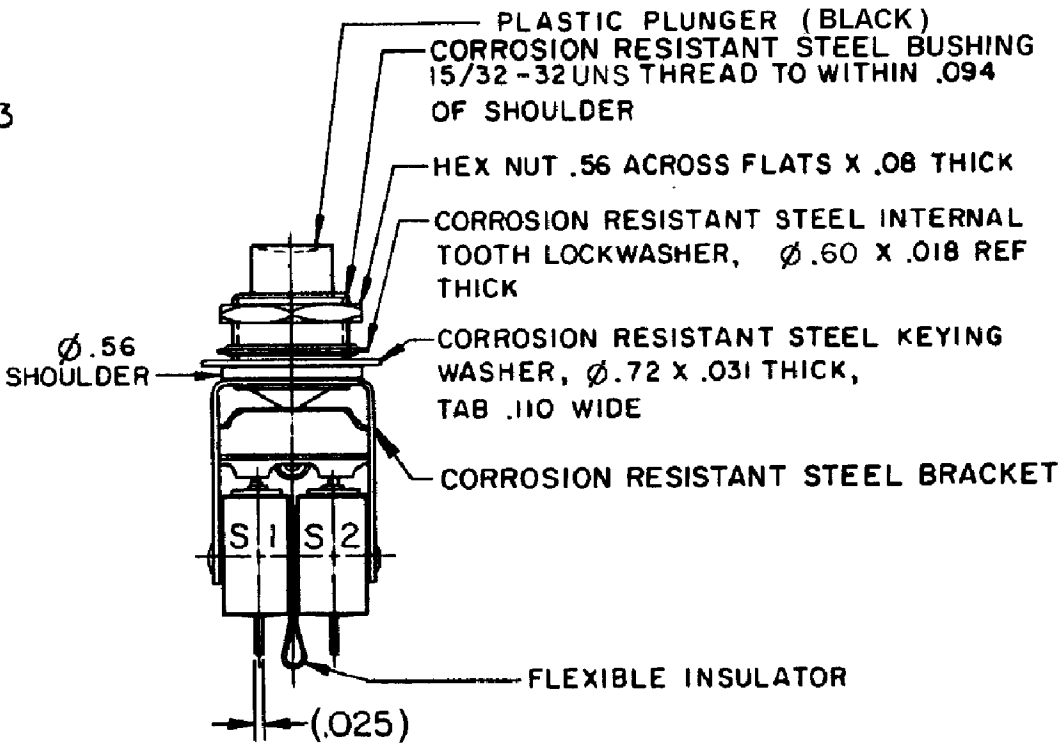


HONEYWELL
PART NUMBER
702PB795

REV	DOCUMENT	CHANGED BY	CHECK
B	0051698	MBN 29APR09	CMH

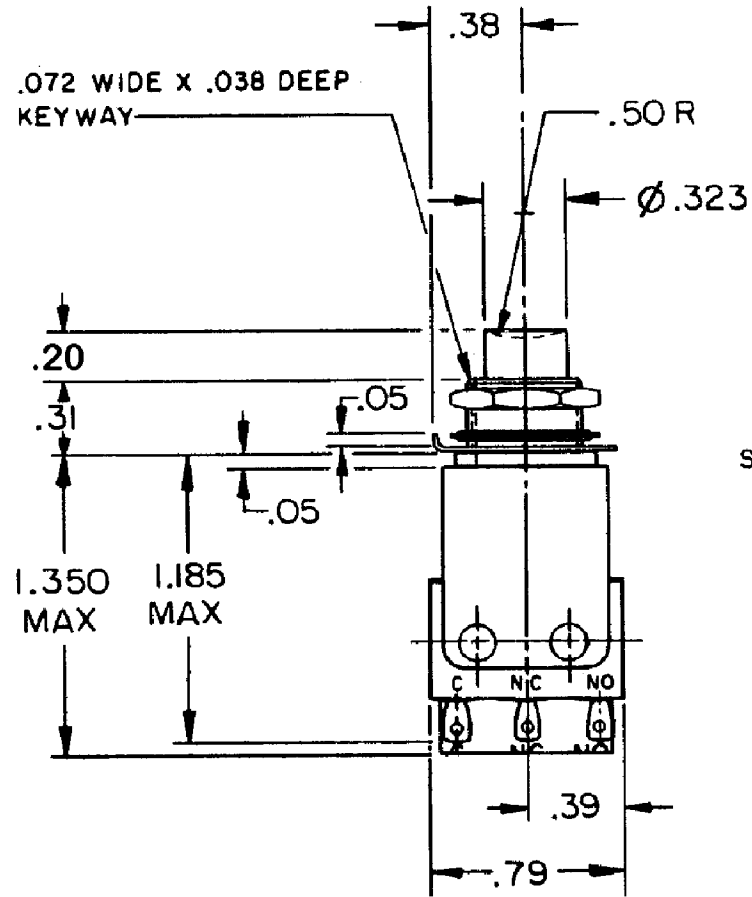

- NOTES:
1 - UNIT INCLUDES "HM TYPE" BASIC SWITCH (2)
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
4 - SWITCHES HAVE GOLD CONTACTS

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE - - - - 4.5 LB MAX	CONTACT ARRANGEMENT S P D T (2)
TOTAL TRAVEL - - - - - .08 MIN	28 VOLTS DC RATING INDUCTIVE - - - - - 1/4 AMP RESISTIVE - - - - - 1 AMP

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:	
NO PLACE X ± 0.040	
ONE PLACE .X ± 0.030	
TWO PLACE .XX ± 0.015	
THREE PLACE .XXX ± 0.005	
FOUR PLACE .XXXX ± 0.0005	
ANGLES ± 2	
THIRD ANGLE PROJECTION	

DRAWN	DVM	18JAN05
CHECK	AK	18JAN05
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE ASSEMBLY PUSH BUTTON SWITCH			
SIZE B	TYPE I	DRAWING NAME 702PB795	REV B
SCALE	NONE	WEIGHT: .063 LB APPROX	SHEET 1 OF 1