


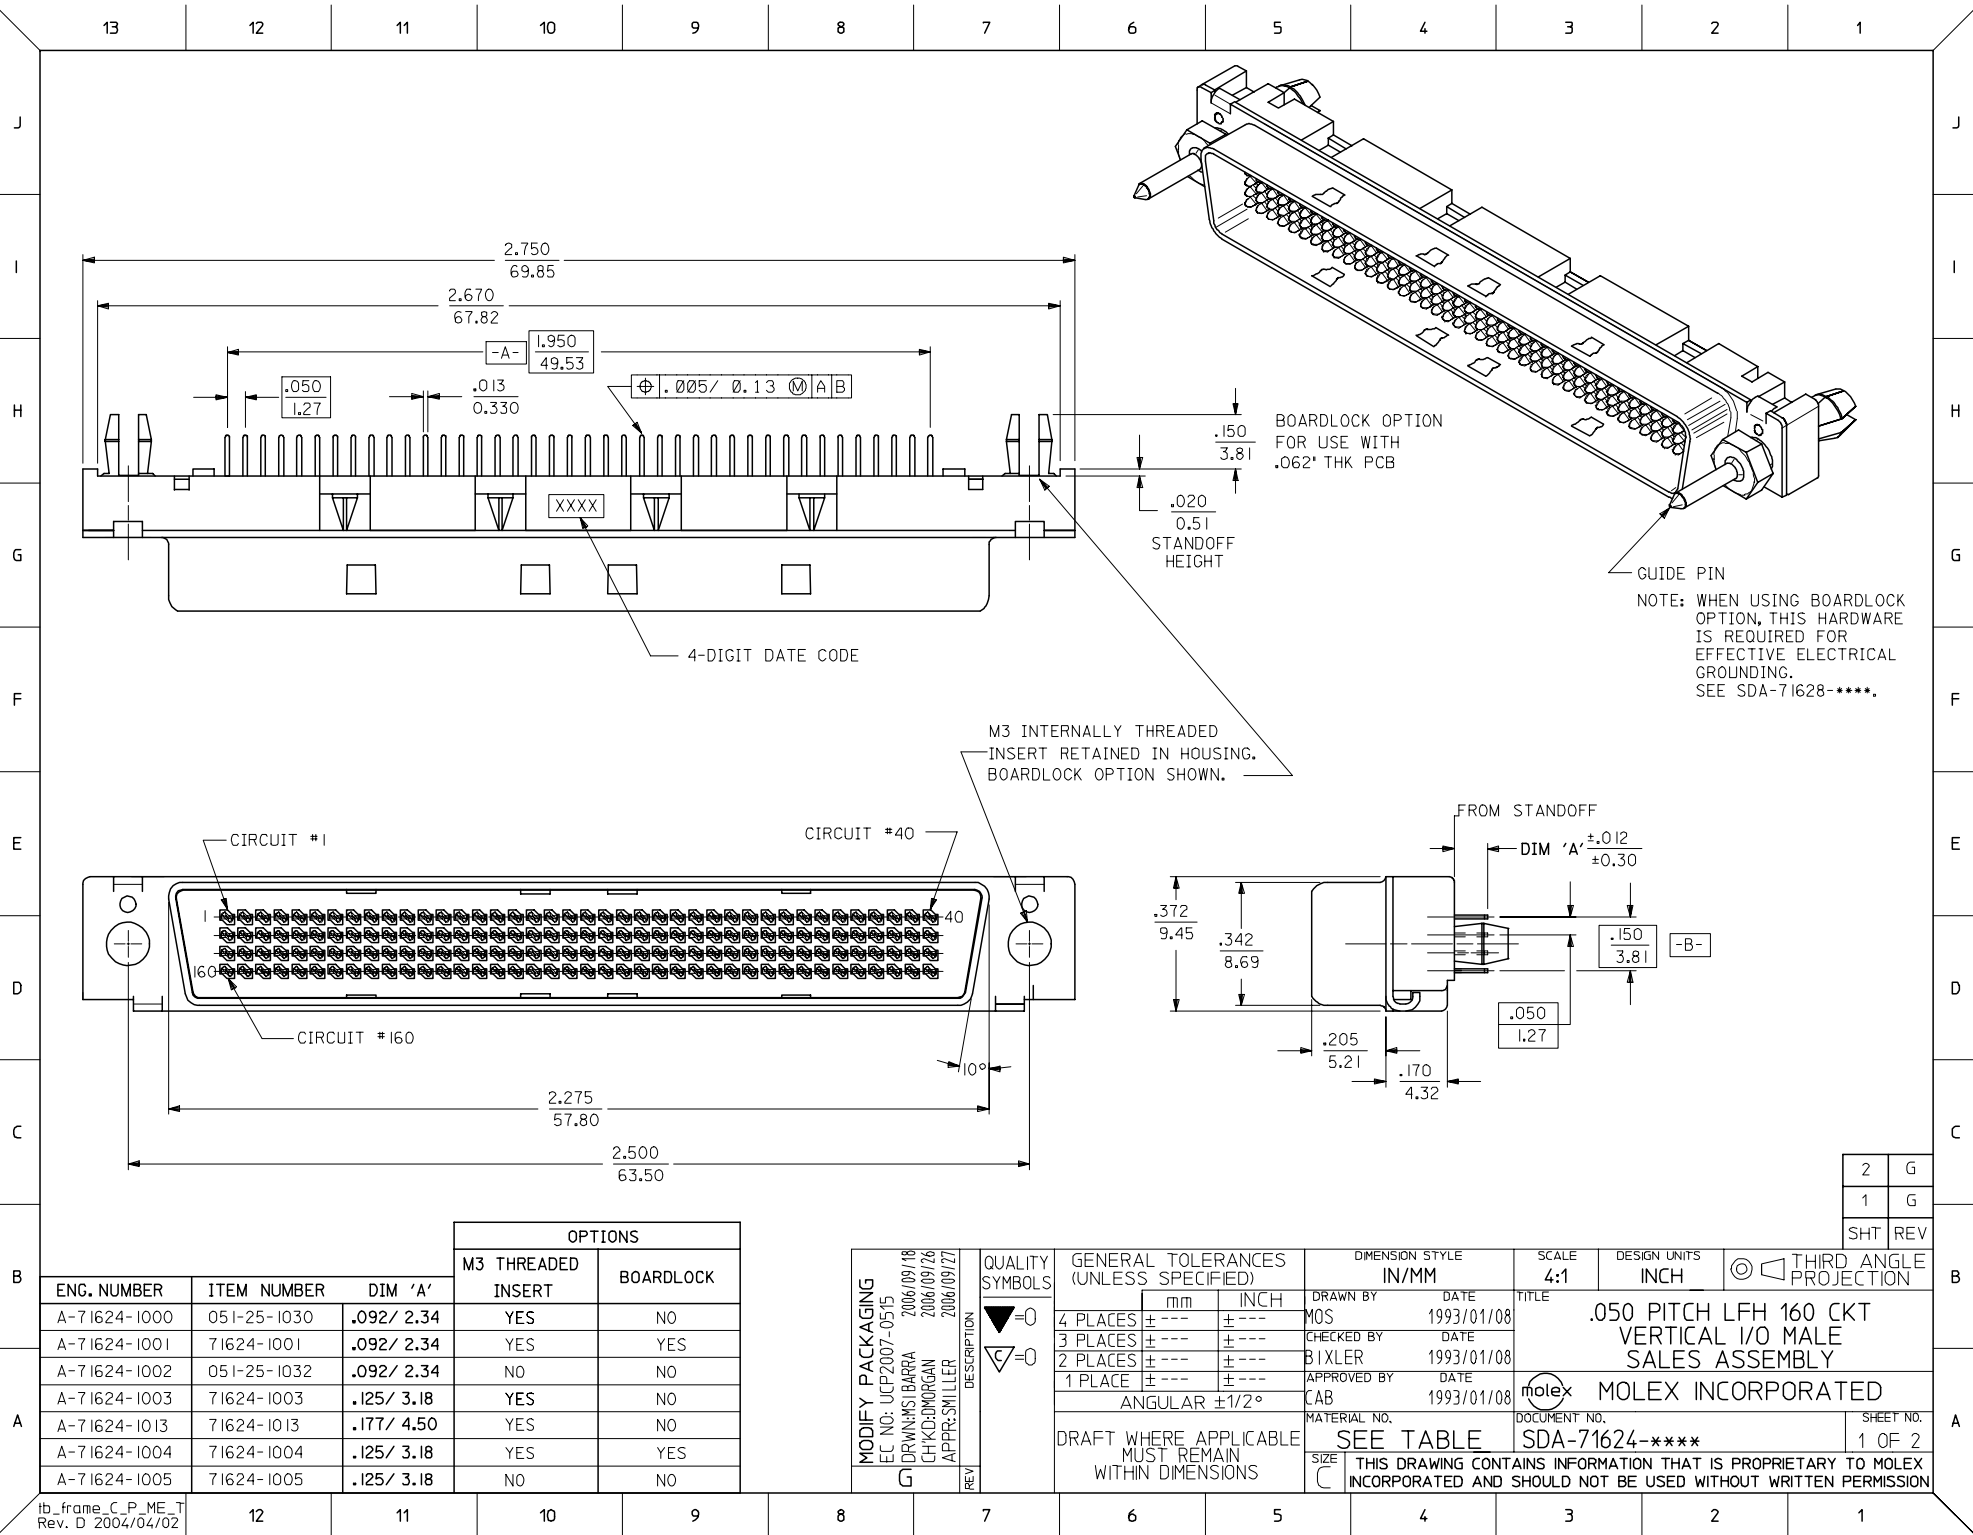

13 12 11 10 9 8 7 6 5 4 3 2 1

NOTES:

1) MATERIALS:

HOUSING: GLASS FILLED LCP (LIQUID CRYSTAL POLYMER), UL 94V-0, BLACK.
 MOLDED STICK: GLASS FILLED LCP (LIQUID CRYSTAL POLYMER), UL94V-0, BLACK.
 MALE CONTACT: PHOS. BRONZE .012±.0005 THICK.
 OUTER SHELL: LOW CARBON STEEL.
 THREADED BOARD LOCK: BRASS

2) PLATING :

TERMINAL: .000030/ 0.00076 MINIMUM GOLD IN SELECTIVE AREA;
 .000100/ 0.00254 MINIMUM TIN IN SELECTIVE AREA;
 OVER NICKEL UNDERPLATE OVERALL.

OUTER SHELL: .000100/ 0.00254 MINIMUM BRIGHT NICKEL
 OVER COPPER FLASH OPTIONAL.



BOARDLOCK: .000150-.000200/ 0.00381-0.00508 TIN
 OVER .000050/ 0.00127 MINIMUM NICKEL.

3) THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-71626.

4) PACKAGING SPECIFICATION PK-70873-297 APPLIES.

NOTE FOR LEAD FREE CONVERSION:

THE PRIMARY SHIPPING CARTON WILL BE
 LABELED 'COMPLIANT TO RoHS DIRECTIVE
 2002/95/EC AND ELV ANNEX II OF
 DIRECTIVE 2000/53/EC'. CARTONS
 WITHOUT THIS LABEL MAY CONTAIN
 PRODUCT WITH LEAD.

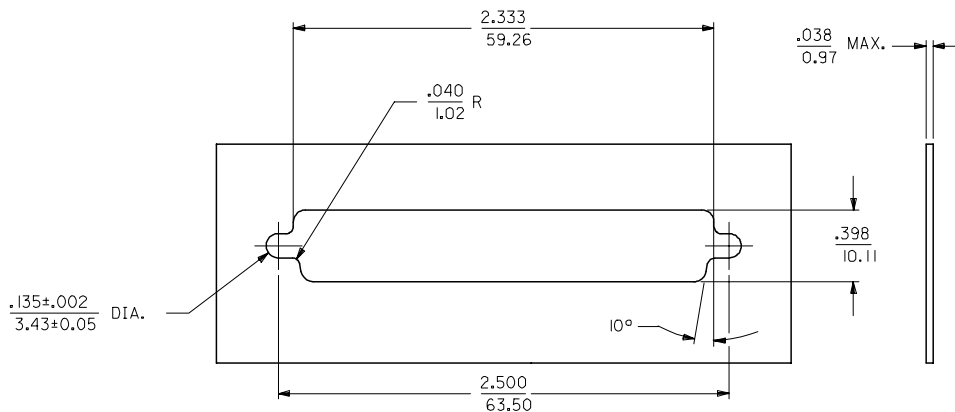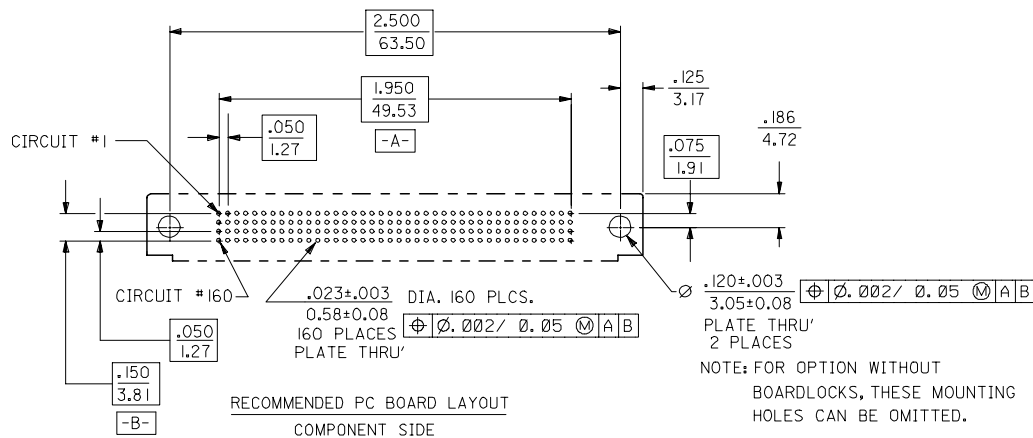

PANEL CUT-OUT DIMENSIONS

ALL TOLERANCES ±.003/ 0.08
 UNLESS OTHERWISE STATED.

MODIFY PACKAGING		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: UCP2007-0515		DRAWN BY: SCHMIDGALL		DATE: 1993/01/08		IN/MM		2:1		INCH		0.050 PITCH LFH 160 CKT	
DRWNS: BARRA		CHECKED BY: BIXLER		DATE: 1993/01/08		mm						VERTICAL I/O MALE	
CHKD: BORGAN		APPROVED BY: CAB		DATE: 1993/01/08		INCH						SALES ASSEMBLY	
APPR: SMILLER		MATERIAL NO.		DOCUMENT NO.		4 PLACES ± --- ± ---		SDA-71624-****		MOLEX INCORPORATED		SHEET NO.	
REV		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX		3 PLACES ± --- ± ---		INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				2 OF 2	
						2 PLACES ± --- ± ---							
						1 PLACE ± --- ± ---							
						ANGULAR ±1/2°							
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							