


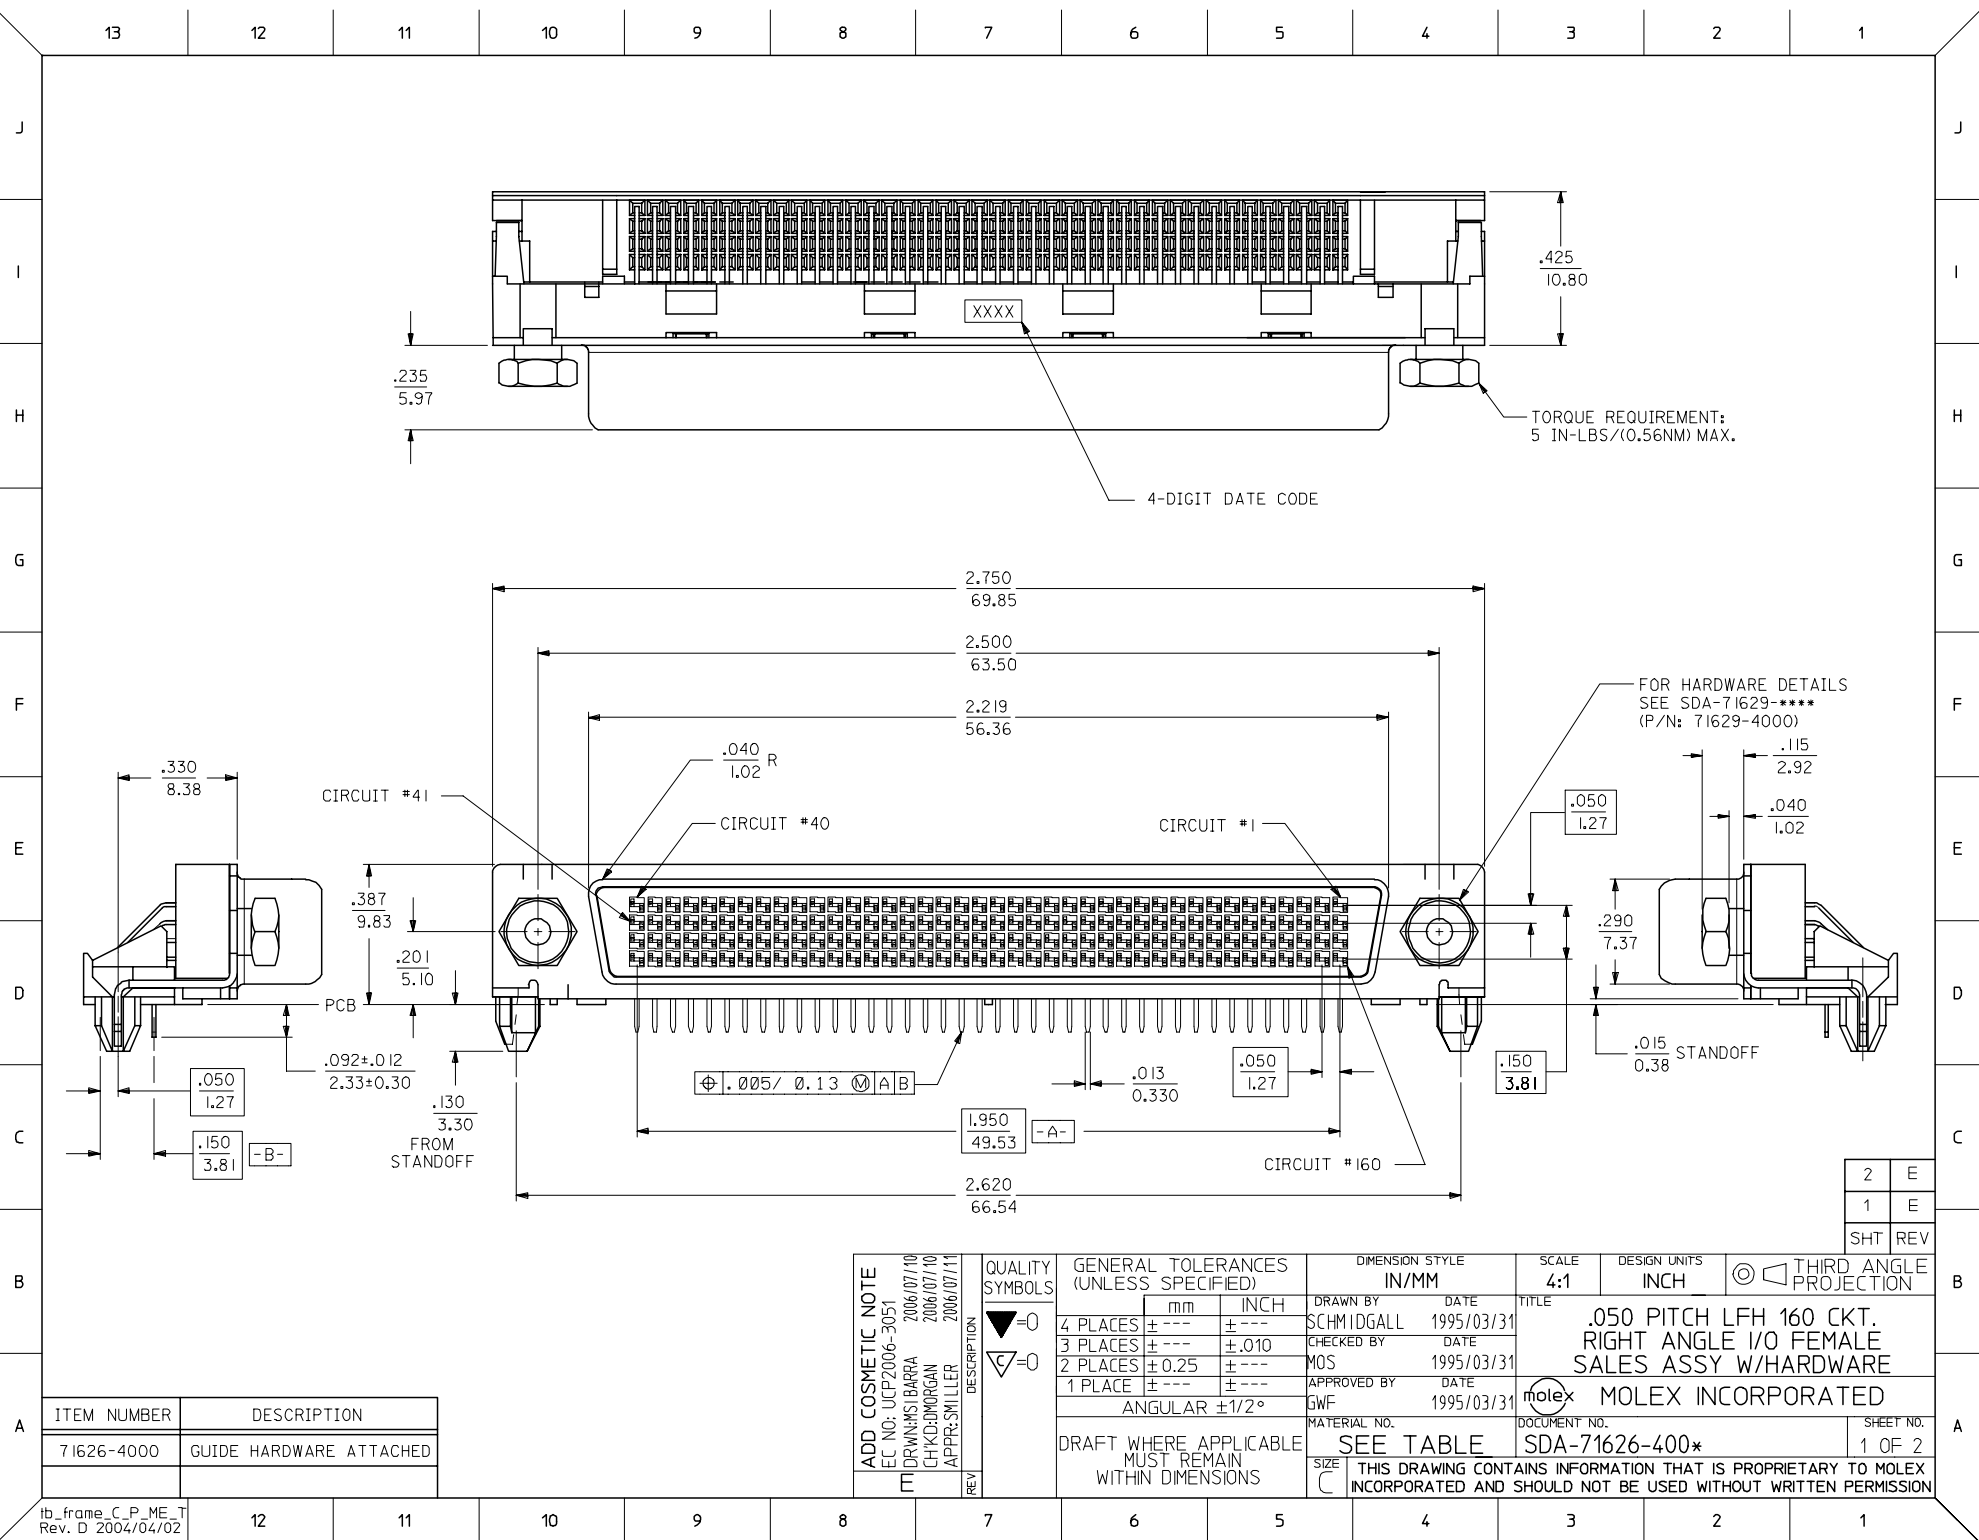

HOUSING: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, 94V-0, BLACK
TAIL ALIGNER: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, 94V-0, BLACK
MOLDED STICK: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, 94V-0, BLACK
FEMALE CONTACT: BERYLLIUM COPPER, .0100±.0005/0.254±.013
OUTER SHELL: LOW CARBON STEEL
THREADED INSERT: BRASS


CONTACT: 30 MICROINCHES/0.76 MICROMETERS MINIMUM GOLD
OVER 50 MICROINCHES/1.27 MICROMETERS MINIMUM NICKEL
IN CONTACT AREA
100 MICROINCHES/2.54 MICROMETERS MINIMUM PURE TIN (MATTE FINISH)
ON TAIL SECTION, OVER 50 MICROINCHES/1.27 MICROMETERS MINIMUM
NICKEL OVERALL

OUTER SHELL: 150-250 MICROINCHES/3.81-6.35 MICROMETERS BRIGHT TIN OVER
50-150 MICROINCHES/ 1.27-3.81 MICROMETERS NICKEL OVER COPPER
FLASH OVERALL (OPTIONAL)

3) THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-71626.


4) PACKAGING SPECIFICATION PK-70873-0299 APPLIES.

5) PART COMPLIES WITH CLASS B OF COSMETIC SPECIFICATION PS-45499-002

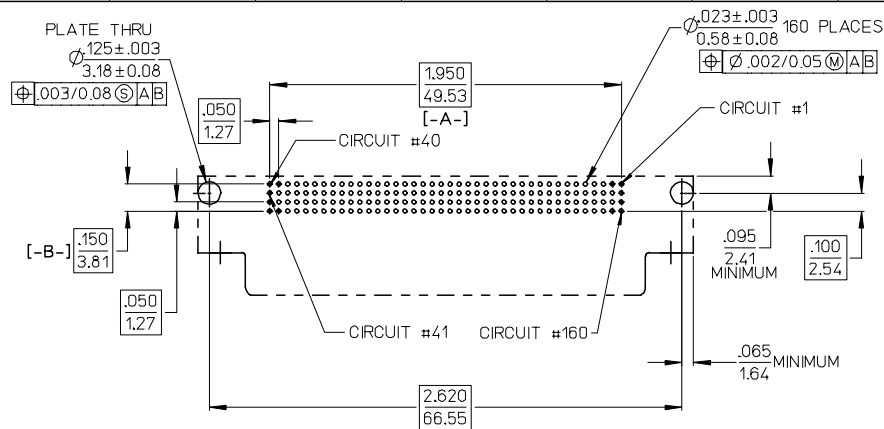


RECOMMENDED PC BOARD LAYOUT

COMPONENT SIDE

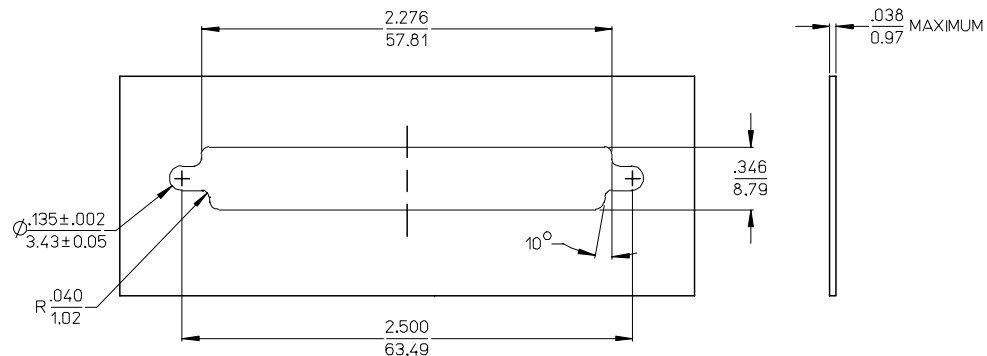

PANEL CUT-OUT DIMENSIONS
ALL TOLERANCES $\pm .003/0.08$
UNLESS OTHERWISE STATED.

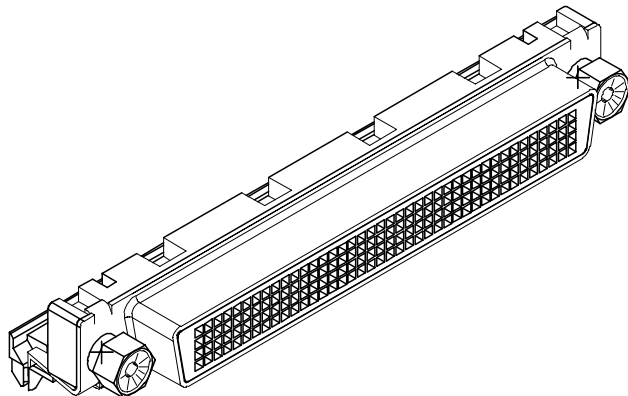

CONVERT TO ME10 EC NO: UCP2006-3051 DRAWNS: BARRA 2006/07/10 CHKD: DMORGAN 2006/07/10 APPR: SMILLER 2006/07/11	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY	DATE	TITLE				
			4 PLACES	± ---	± ---	SCHMIDGALL	1995/03/31	.050 PITCH LFH 160 CKT.				
			3 PLACES	± ---	± .010	CHECKED BY	DATE	RIGHT ANGLE I/O FEMALE				
			2 PLACES	± 0.25	± ---	MOS	1995/03/31	SALES ASSY W/HARDWARE				
			1 PLACE	± ---	± ---	APPROVED BY	DATE	MOLEX MOLEX INCORPORATED				
			ANGULAR ±1/2°		GWF	1995/03/31						
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
					SEE TABLE		SDA-71626-400*		2 OF 2			
					SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					