

MATERIALS AND FINISHES

BODY BRASS
PLATED NICKEL

CENTER CONTACT PHOSPHOR BRONZE
PLATED GOLD





INSULATOR TEFLON

CRIMP FERRULE BRASS
PLATED NICKEL


GASKET SILICONE RUBBER

WASHER PHOSPHOR BRONZE
PLATED NICKEL


NUT BRASS
PLATED NICKEL

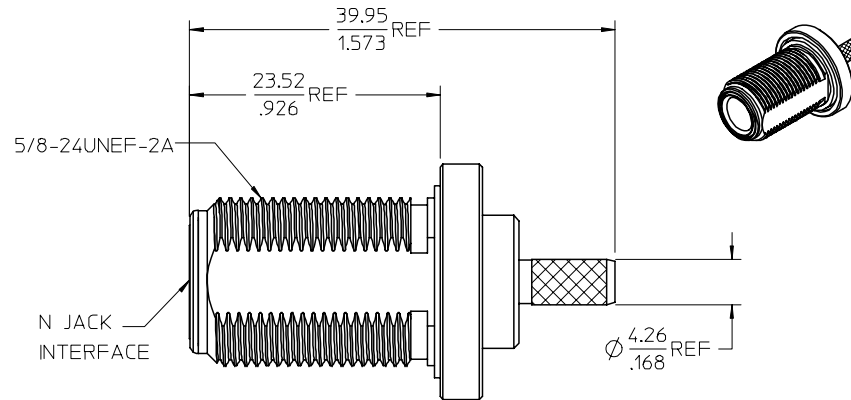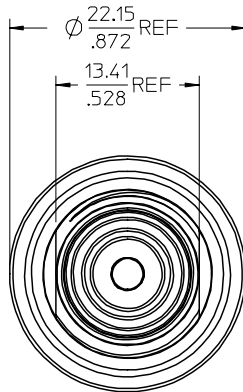


NUT

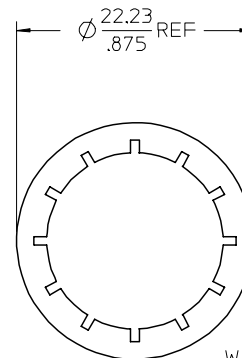


WASHER




RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS: 6.35(.25)
RECOMMENDED MOUNTING TORQUE: 229N-CM(20 IN-LBS)



CENTER CONTACT ϕ 2.10
.083 REF



FERRULE

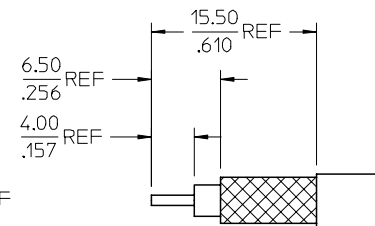

CABLE STRIP DIMENSION
CENTER CONTACT CRIMP (HEX:1.69(.067))
OUTER CONDUCTOR CRIMP (HEX:5.41(.213))

PART # 73100-0038

PS-73598-0033	ELEC/MECH PERFORMANCE
SPECIFICATION	DESCRIPTION

CHG: REDREW TO CORRECT VIEW LINKS	EC NO: URF-2006-0006 DRAWN:SSHAH CHKD:SSHAH APPR:JWENER	REV	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	TITLE N JACK, STRAIGHT BULKHEAD FOR RG142 50 OHMS, N-JC MOLEX INCORPORATED
					4 PLACES	± .---	± .---	R FIELDS	1993/05/26			
					3 PLACES	± .---	± .---	CHECKED BY	DATE			
					2 PLACES	± .---	± .---	R FIELDS	1993/09/09			
					1 PLACE	± .---	± .---	APPROVED BY	DATE			
					ANGULAR ± 2 °		KHW	1993/08/20				
							MATERIAL NO.	DOCUMENT NO.		SHEET NO.		
							731000038	SD-73100-0038		1 OF 1		
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				