MATERIALS AND FINISHES

BODY, JAM NUT, CRIMP TUBE BRASS
PLATED GOLD

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON

PIN CONTACT: BRASS
PLATED: GOLD

LOCKWASHER: PHOSPHOR BRONZE
PLATED: GOLD

GASKET: SILICONE RUBBER

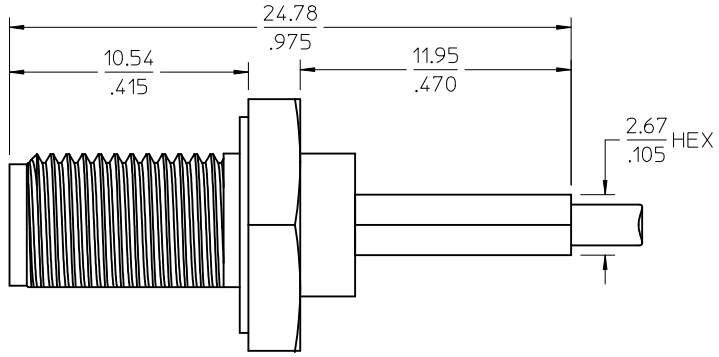



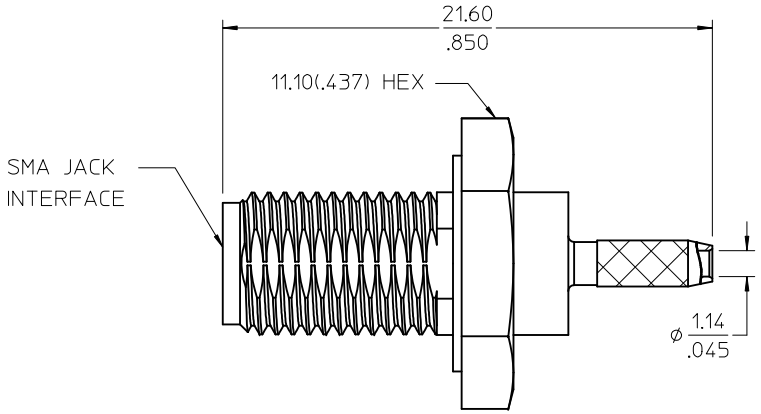



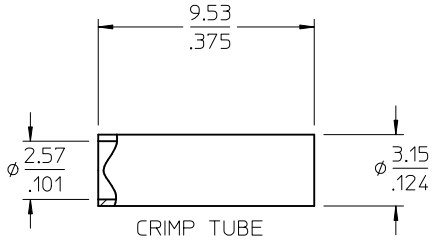

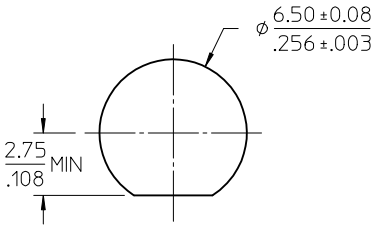

RECOMMENDED
MOUNTING HOLE
MAX THICKNESS: 2.4 (.094)

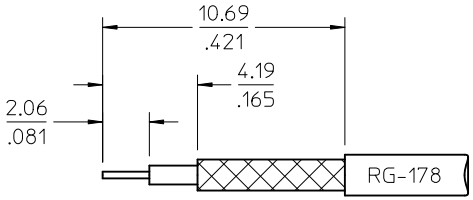

SUGGESTED CABLE STRIP



LOCKWASHER







JAM NUT

PART NO.	PACKAGING
73251-1481	SINGLE BAG
73251-1480	BULK

SPECIFICATION	DESCRIPTION
MIL-STD-348A, FIG. 310.2	INTERFACE

REV	DESCRIPTION
A2	CHG: ADD -1481 ADD PACKAGING EC NO: URF2012-0421 2012/01/26 DRWN: JWIENER 2012/01/26 CH'KD: SSS 2012/01/27 APPR: JWIENER 2012/01/27

QUALITY SYMBOLS
▼=0
(C)=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

		DATE
DRAWN BY	JM	2004/10/12
CHECKED BY	JM	2004/10/12
APPROVED BY	JWIENER	2010/01/28

TITLE: SMA JACK,BLKHD FOR RG178
50 OHMS, EWR-2608
SMA-JC

molex MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-73251-148
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION