


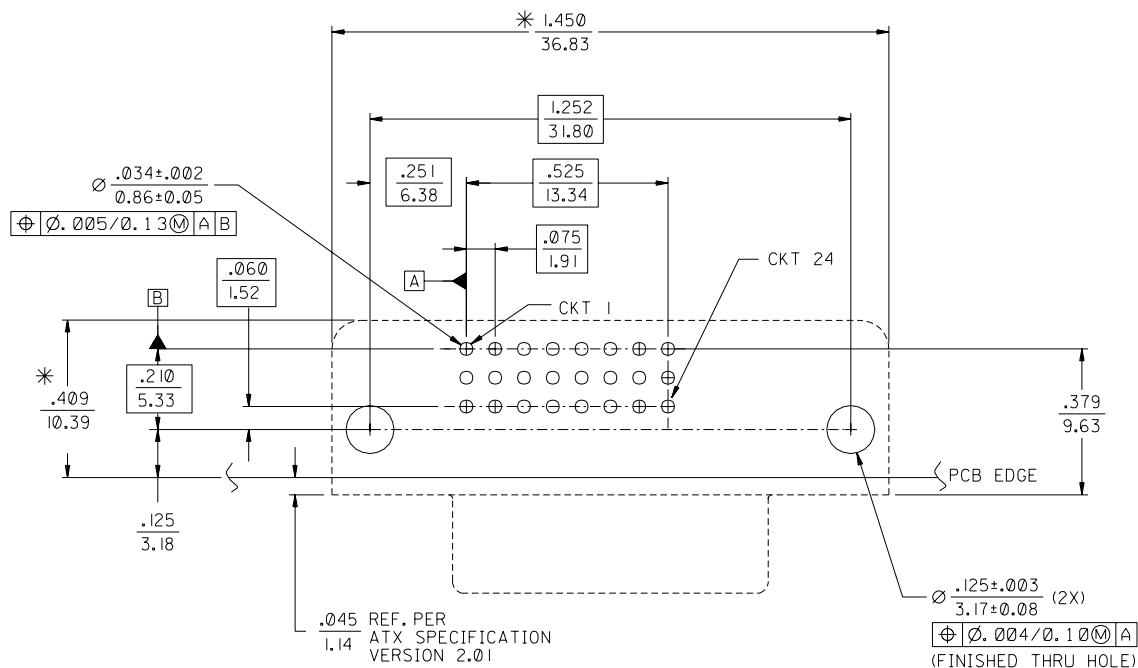

PLATING OPTIONS:

PLATING OPTION #1:


OUTER SHIELD -- 150u"/(3.75um) MIN. BRIGHT TIN OVER 50u"/(1.27um) MIN. NICKEL OVER COPPER FLASH

.075"/(1.91mm) CONTACTS -- 30u"/(0.75um) MIN. SELECT GOLD AND 100u"/(2.50um) MIN. SELECT TIN/LEAD OVER 50u"/(1.27um) MIN. NICKEL OVERALL.

PLATING OPTION #2:

OUTER SHIELD -- 150u"/(3.75um) MIN. BRIGHT TIN OVER 50u"/(1.27um) MIN. NICKEL OVER COPPER FLASH

.075"/(1.91mm) CONTACTS -- SELECT GOLD FLASH AND 100u"/(2.50um) MIN. SELECT TIN/LEAD OVER 50u"/(1.27um) MIN. NICKEL OVERALL.

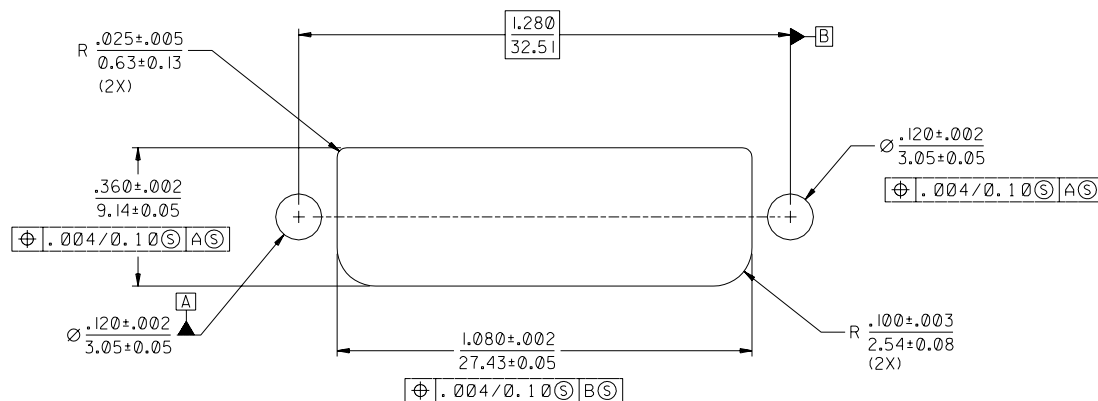

SEE SHEET 1	EC NO. C	DRAWN: CHK: APPR:	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 4 : 1	DESIGN UNITS ☐ mm ☒ INCH		THIRD ANGLE PROJECTION	DIMENSIONS:		☐ mm ONLY	SHT	REV
										☐ mm ONLY					
										☐ mm ONLY					
										☐ mm ONLY					
										☐ mm ONLY					
										☐ mm ONLY					
										☐ mm ONLY					