

Spezifikation für Freigabe / specification for release

Kunde / customer :

Artikelnummer / part number : **744154**


Bezeichnung : **SPEICHERDROSSEL WE-SI**

description : **TOROIDAL LINE CHOKE WE-SI**



DATUM / DATE : 2009-12-01

A Mechanische Abmessungen / dimensions:

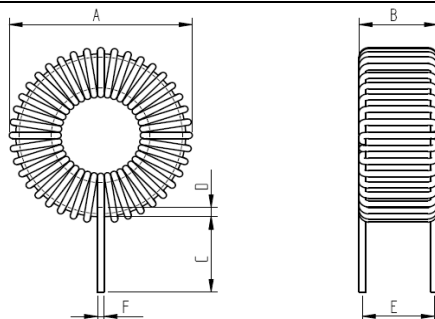

A	32,0 max	mm
B	15,5 max	mm
C	12,0 ± 1,0	mm
D	1,0 min	mm
E	13,0 ± 1,5	mm
F	ø 1,0 ref	mm

B Elektrische Eigenschaften / electrical properties:

C Lötpad / soldering spec.:

Eigenschaften / properties	Testbedingungen / test conditions		Wert / value	Einheit / unit	tol.
Leerlauf-Induktivität / inductance	10 kHz / 5mA	L _O	172,0	µH	±20%
Nenn-Induktivität / nominal inductance	10 kHz/5mA/IN	L _N	100,0	µH	+20/-10%
DC-Widerstand / DC-resistance	typ. 0,040 Ohm	R _{DC}	0,0550	Ω	max.
Nennstrom / nominal current		I _N	5,0	A	

D Prüfgeräte / test equipment:

E Testbedingungen / test conditions:

Wayne Kerr 3260B für/for L_O
 GMC Metrahit 271 Milliohmometer für/for R_{DC}
 Fluke 54II Thermometer für/for I_{DC}

Luftfeuchtigkeit / humidity: 33%
 Umgebungstemperatur / temperature: +20 °C

F Werkstoffe & Zulassungen / material & approvals:

G Eigenschaften / general specifications:

Basismaterial / base material: Ferrit / ferrite 3 W 7538
 Draht / wire: 2 UEW; 130 °C

Betriebstemp. / operating temperature -25 °C - + 85 °C

Freigabe erteilt / general release:

Kunde / customer

Datum / date

Unterschrift / signature

Würth Elektronik

Geprüft / checked

Kontrolliert / approved

CZ	Version 4	2009-12-01
CZ	Version 3	2009-07-22
MST	Version 1	2004-10-11
Name	Änderung / modification	Datum / date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400
<http://www.we-online.com>