




WIRING DIAGRAM			
P1 END		P2 END	
PAD	SIGNAL	PAD	SIGNAL
12	Rx-	19	Tx-
13	Rx+	18	Tx+
18	Tx+	13	Rx+
19	Tx-	12	Rx-

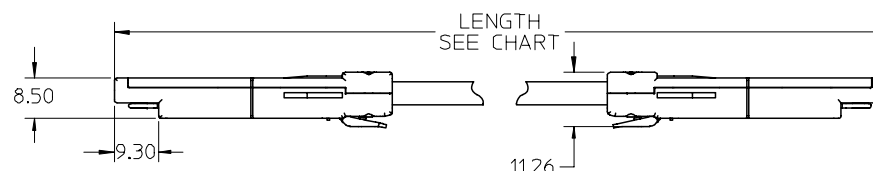

PART NUMBER	LENGTH
74743-0001	1 M ±0.05 M
74743-0002	2 M ±0.08 M
74743-0003	3 M ±0.08 M
74743-0004	4 M ±0.08 M
74743-0005	5 M ±0.08 M
74743-0006	6 M ±0.08 M
74743-0007	7 M ±0.08 M
74743-0008	8 M ±0.08 M
74743-0009	9 M ±0.08 M
74743-0010	10 M ±0.08 M
74743-0011	11 M ±0.08 M
74743-0012	12 M ±0.08 M
74743-0013	13 M ±0.08 M
74743-0014	14 M ±0.08 M
74743-0015	15 M ±0.08 M

NOTES:

- MATERIALS
BACKSHELLS - NICKEL PLATED ZINC
LATCH - GLASS FILLED POLYCARBONATE
PCB - FR-4
RIVETS - STAINLESS STEEL
IMPEDANCE - 100 OHMS DIFFERENTIAL, PASSIVE
- EACH ASSEMBLY HAS A SERIAL ID
- SEE MOLEX DRAWINGS SD-71153-7*** FOR CABLE DETAILS
- 4.25 Gbps F.C. BACKWARDS COMPATIBLE TO 1.0625 Gbps F.C.

RELEASED EC NO: 2006/01/05 DRWN: JRESENDE CHKD: JRESENDE APPR: DDOYE 2006/01/17 2006/02/21	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION				
				mm	INCH	DRAWN BY JRESENDE	DATE 04/10/14	TITLE SMALL FORM PLUGGABLE ACTIVE, FIBRE CABLE ASSEMBLY - 4.25 GBPS					
			4 PLACES	± ---	± ---	CHECKED BY JRESENDE	DATE 04/10/14						
			3 PLACES	± ---	± ---	APPROVED BY DDOYE	DATE 04/10/14	MOLEX INCORPORATED					
			2 PLACES	± ---	± ---	MATERIAL NO. SEE TABLE							DOCUMENT NO. SD-74743-001
			1 PLACE	± ---	± ---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
			ANGULAR ± ---°										
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										