

7SEI-T

M

DRAWING
 NUMBER

ISSUE

RELEASE NO. PR-7883

CHECK

REVISIONS

CHECK

18 MAY 79


18 MAY 79

18 MAY 79

18 MAY 79

FO-52848-A

DRAWN

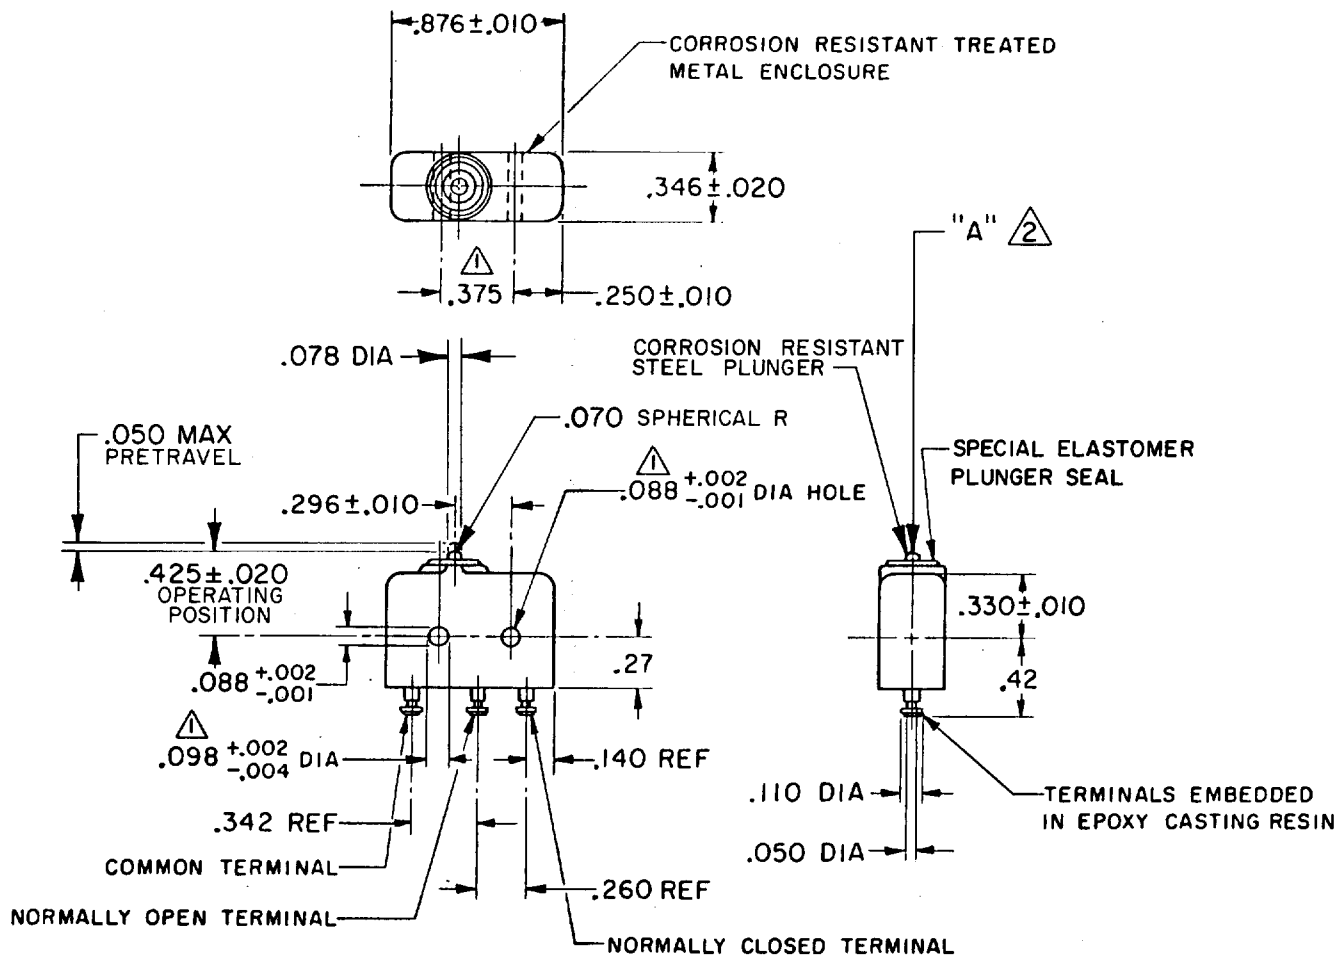


NOTE -

- ① - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.087$ MAX DIA ON $.375 \pm .002$ CENTERS
- ② - ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 4-8 OZ
 RELEASE FORCE ----- 2 OZ MIN
 RELEASE TRAVEL ----- .004 MIN
 DIFFERENTIAL TRAVEL ----- .004 MAX
 OVERTRAVEL ----- .003 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
 S P D T

250 VAC ----- 5 AMP
 30 VOLTS DC RATING

INDUCTIVE ----- SEA LEVEL -- 3 AMP
 50,000 FT -- 2.5 AMP
 RESISTIVE ----- SEA LEVEL -- 5 AMP
 50,000 FT -- 5 AMP
 MAXIMUM INRUSH ----- 24 AMP

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
 APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/.04	X X
ONE PLACE	X, X	0.4/.016	X X X
TWO PLACES	X, XX	0.15/.006	X X X X
THREE PLACES	X, XXX		X X X X X
ANGLES			

SI METRIC ☐ US CUSTOMARY ☒

DESIGN UNITS

WEIGHT .26 OZ MAX